

Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269



Scaled data based on original data using  
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-  
State Lighting Products

Test Report Prepared for  
Cooper Lighting Solutions

Brand: IRiS

Report Number: P1257118

Luminaire Tested: P3A09R559040DE010 E3DLD1LI

Issue Date: 1/30/2026

**Test Information**

Test Method: LM-79-2019  
Report Number: P1257118  
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2601-647-34)  
Test Lab: INNOVATION CENTER  
Issue Date: 1/30/2026  
Manufacturer: COOPER LIGHTING SOLUTIONS  
Product Line: IRiS  
Catalog Number: P3A09R559040DE010 E3DLD1LI  
Description: 3in Adjustable LED luminaire with, R55 optic, 4000K CCT AND, 90CRI , E3DLD1LI TRIM  
Light Source: -  
Ballast/Driver: -

**Summary**


Lumens per Lamp: N/A  
Luminaire Lumens: 666.0 lumens  
Efficiency: N/A  
Efficacy: 60.0 lumens/watt  
Spacing Criteria (0/90/45): 0.91 / 0.91 / 0.97  
Luminous Opening: Circular (Dia: 0.25' x H: 0')  
CIE Type: Direct

Input Watts (W): 11.1  
Input Voltage (V): NR  
Input Current (Ain): NR  
Voltage Rise (V): NR  
Power Factor: NR  
Total Harmonic Distortion (THDi): NR  
Frequency (hertz): 60  
Stabilization Time: NR  
Operation Time: NR  
Ambient Temperature (°C): NR  
Test Distance: 24 FT

TEST NUMBER: P1257118

CATALOG NUMBER: P3A09R559040DE010 E3DLD1LI

### Luminous Intensity Polar Plot

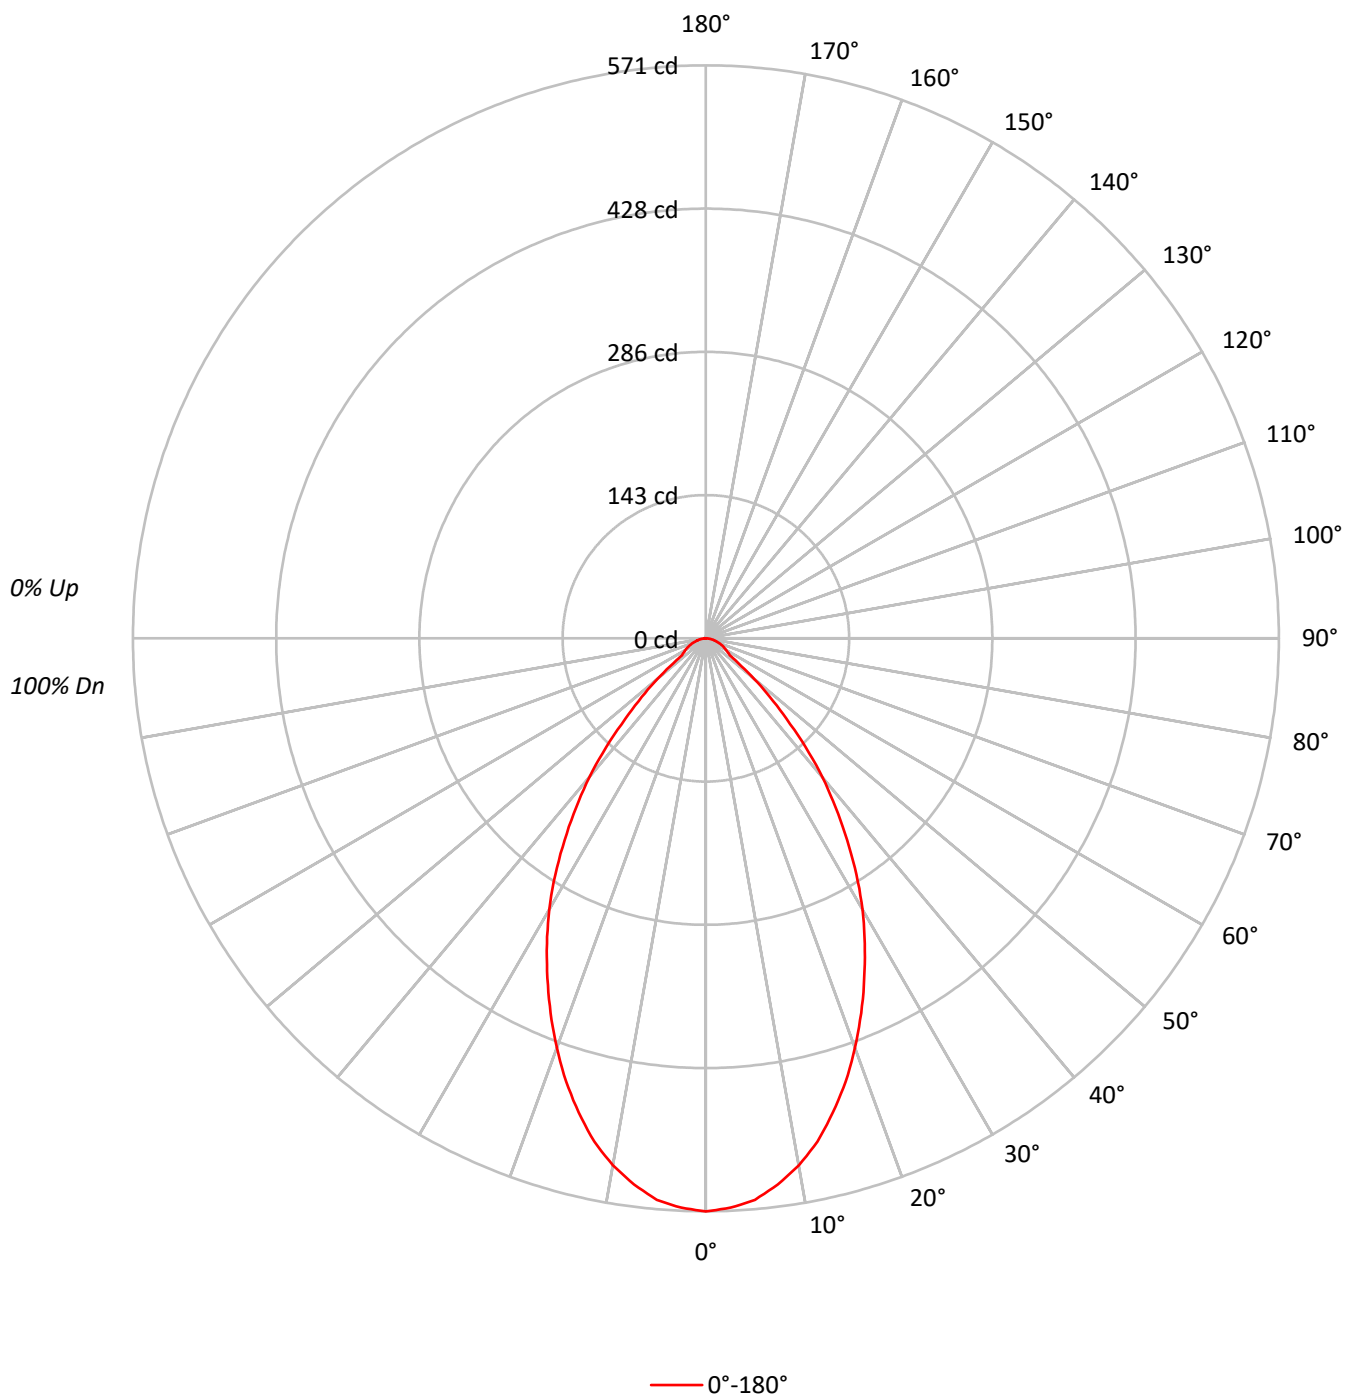

TEST NUMBER: P1257118

CATALOG NUMBER: P3A09R559040DE010 E3DLD1LI

**COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:**

|     |     |     |     |     |     |     |     |     |     |     |     |  |     |     |     |  |     |
|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|--|-----|-----|-----|--|-----|
| RF  | 20  |     |     |     | 20  |     |     |     | 20  |     |     |  | 20  |     |     |  | 20  |
| RC  | 80  |     |     |     | 70  |     |     |     | 50  |     |     |  | 30  |     |     |  | 10  |
| RW  | 70  | 50  | 30  | 10  | 70  | 50  | 30  | 10  | 50  | 30  | 10  |  | 50  | 30  | 10  |  | 50  |
| RCR |     |     |     |     |     |     |     |     |     |     |     |  |     |     |     |  |     |
| 0   | 119 | 119 | 119 | 119 | 116 | 116 | 116 | 116 | 111 | 111 | 111 |  | 106 | 106 | 106 |  | 102 |
| 1   | 112 | 109 | 106 | 103 | 110 | 107 | 104 | 102 | 103 | 100 | 98  |  | 99  | 97  | 95  |  | 95  |
| 2   | 105 | 100 | 95  | 91  | 103 | 98  | 93  | 90  | 94  | 91  | 88  |  | 91  | 88  | 86  |  | 89  |
| 3   | 99  | 91  | 85  | 81  | 97  | 90  | 84  | 80  | 87  | 82  | 79  |  | 85  | 81  | 77  |  | 82  |
| 4   | 93  | 84  | 77  | 72  | 91  | 83  | 77  | 72  | 80  | 75  | 71  |  | 78  | 74  | 70  |  | 76  |
| 5   | 87  | 77  | 71  | 66  | 85  | 76  | 70  | 65  | 75  | 69  | 65  |  | 73  | 68  | 64  |  | 71  |
| 6   | 82  | 72  | 65  | 60  | 80  | 71  | 64  | 60  | 69  | 64  | 59  |  | 68  | 63  | 59  |  | 66  |
| 7   | 77  | 67  | 60  | 55  | 76  | 66  | 59  | 55  | 65  | 59  | 54  |  | 63  | 58  | 54  |  | 62  |
| 8   | 73  | 62  | 55  | 51  | 72  | 62  | 55  | 51  | 60  | 55  | 50  |  | 59  | 54  | 50  |  | 58  |
| 9   | 69  | 58  | 51  | 47  | 68  | 58  | 51  | 47  | 57  | 51  | 47  |  | 56  | 50  | 46  |  | 55  |
| 10  | 65  | 55  | 48  | 44  | 64  | 54  | 48  | 44  | 53  | 47  | 43  |  | 52  | 47  | 43  |  | 52  |

**AVERAGE LUMINANCE (cd/sqm):**

|     |        |
|-----|--------|
|     | 0°     |
| 0°  | 125231 |
| 5°  | 123618 |
| 10° | 118746 |
| 15° | 111079 |
| 20° | 101322 |
| 25° | 90392  |
| 30° | 79075  |
| 35° | 65692  |
| 40° | 51783  |
| 45° | 35135  |
| 50° | 21458  |
| 55° | 11125  |
| 60° | 10350  |
| 65° | 9806   |
| 70° | 9104   |
| 75° | 7964   |
| 80° | 7956   |
| 85° | 6038   |

**MAXIMUM LUMINANCE 45°-90°:**

Horizontal Angle: 0°

Vertical Angle: 45°

Luminance: 35135 cd/sqm

TEST NUMBER: P1257118

CATALOG NUMBER: P3A09R559040DE010 E3DLD1LI

**ZONAL LUMENS:**

| Zone      | Lumens | % Fixture |
|-----------|--------|-----------|
| 0°-10°    | 52.7   | 7.9       |
| 10°-20°   | 136.8  | 20.5      |
| 20°-30°   | 171.2  | 25.7      |
| 30°-40°   | 152.9  | 23.0      |
| 40°-50°   | 89.5   | 13.4      |
| 50°-60°   | 30.9   | 4.6       |
| 60°-70°   | 18.7   | 2.8       |
| 70°-80°   | 10.4   | 1.6       |
| 80°-90°   | 3.0    | 0.5       |
| 90°-100°  | 0.0    | 0.0       |
| 100°-110° | 0.0    | 0.0       |
| 110°-120° | 0.0    | 0.0       |
| 120°-130° | 0.0    | 0.0       |
| 130°-140° | 0.0    | 0.0       |
| 140°-150° | 0.0    | 0.0       |
| 150°-160° | 0.0    | 0.0       |
| 160°-170° | 0.0    | 0.0       |
| 170°-180° | 0.0    | 0.0       |
| 0°-30°    | 360.7  | 54.2      |
| 0°-40°    | 513.5  | 77.1      |
| 0°-60°    | 634.0  | 95.2      |
| 0°-90°    | 666.0  | 100.0     |
| 90°-120°  | 0.0    | 0.0       |
| 90°-150°  | 0.0    | 0.0       |
| 90°-180°  | 0.0    | 0.0       |
| 0°-180°   | 666.0  | 100.0     |

**CANDELA DISTRIBUTION:**

|     | 0°  | Flux |
|-----|-----|------|
| 0°  | 571 |      |
| 5°  | 562 | 53   |
| 15° | 489 | 137  |
| 25° | 374 | 171  |
| 35° | 245 | 153  |
| 45° | 113 | 90   |
| 55° | 29  | 31   |
| 65° | 19  | 19   |
| 75° | 9   | 10   |
| 85° | 2   | 3    |
| 90° | 0   |      |

TEST NUMBER: P1257118

CATALOG NUMBER: P3A09R559040DE010 E3DLD1LI

**CANDELA DISTRIBUTION (FULL):**

|       | 0°    |
|-------|-------|
| 0°    | 571.1 |
| 2.5°  | 567.9 |
| 5°    | 561.6 |
| 7.5°  | 549.0 |
| 10°   | 533.3 |
| 12.5° | 513.7 |
| 15°   | 489.3 |
| 17.5° | 463.3 |
| 20°   | 434.2 |
| 22.5° | 404.3 |
| 25°   | 373.6 |
| 27.5° | 343.0 |
| 30°   | 312.3 |
| 32.5° | 279.2 |
| 35°   | 245.4 |
| 37.5° | 212.4 |
| 40°   | 180.9 |
| 42.5° | 147.1 |
| 45°   | 113.3 |
| 47.5° | 86.5  |
| 50°   | 62.9  |
| 52.5° | 40.9  |
| 55°   | 29.1  |
| 57.5° | 26.0  |
| 60°   | 23.6  |
| 62.5° | 21.2  |
| 65°   | 18.9  |
| 67.5° | 16.5  |
| 70°   | 14.2  |
| 72.5° | 11.8  |
| 75°   | 9.4   |
| 77.5° | 7.9   |
| 80°   | 6.3   |
| 82.5° | 3.9   |
| 85°   | 2.4   |
| 87.5° | 1.6   |
| 90°   | 0.0   |

LM-79-2019: Approved Method: Electrical and Photometric Measurements of Solid-State Lighting Products

Report Prepared for

Cooper Lighting Solutions

IRiS

Report Number: SP1-2504-409-14

Test Date: 05/14/2025

Luminaire Tested: LD3A05R129040D010 E3D1H

Data in this report applies to families of products including LD3A


### Test Information

Test Method: LM-79-2019  
 Report Number: SP1-2504-409-14  
 Test Lab: COOPER LIGHTING SOLUTIONS  
 Photometer: SP1 - 76IN SPHERE  
 Measurement Geometry:  $4\pi$   
 Issue Date: 05/18/2025  
 Manufacturer: COOPER LIGHTING SOLUTIONS  
 Product Line: IRiS  
 Catalog Number: **LD3A05R129040D010 E3D1H**  
 Description: 3in Adjustable LED luminaire with, R12 optic, 4000K CCT AND, 90CRI LEDS, E3D1H TRIM

### Spectral Parameters

CCT (K): 4015  
 CIE  $u'$ : 0.2239  
 CIE  $v'$ : 0.5033  
 Duv: 0.0016  
 CIE x: 0.3809  
 CIE y: 0.3805  
 CIE z: 0.2386  
 Peak Wavelength (nm): 450  
 Dominant Wavelength (nm): 578  
 Purity: 28.51686  
 R<sub>f</sub>: 91.5  
 R<sub>g</sub>: 100.3

CRI (Ra): 92.3  
 R1: 93.1  
 R2: 93.8  
 R3: 94.2  
 R4: 94.2  
 R5: 92.7  
 R6: 91.9  
 R7: 94.0  
 R8: 84.8  
 R9: 58.4  
 R10: 85.3  
 R11: 94.4  
 R12: 74.9  
 R13: 93.3  
 R14: 96.5  
 R15: 89.0

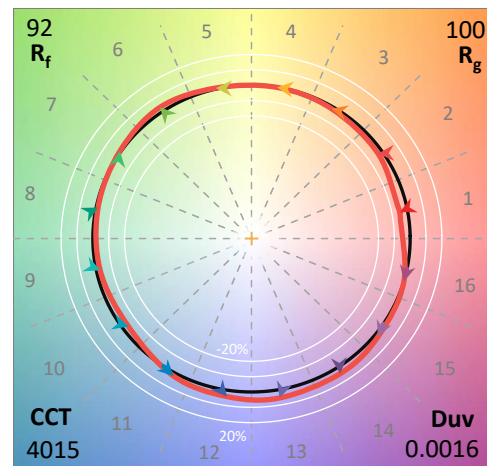

### Test Conditions

Stabilization Time: 26M  
 Operation Time: 1H 26M  
 Sphere Temperature (°C): 24.9




REPORT NUMBER: SP1-2504-409-14


| Measurement and Test Equipment |                       |                  |                      |
|--------------------------------|-----------------------|------------------|----------------------|
| Instrument                     | Identification Number | Calibration Date | Calibration Due Date |
| Photometer                     | IN0058                | 12/16/2024       | 6/16/2025            |
| Power Meter                    | INXT2011004           | 1/21/2025        | 1/21/2026            |
| AC Power Source                | IN0063                | 10/22/2024       | 10/22/2025           |
| DC Power Source                | IN0208                | 10/22/2024       | 10/22/2025           |
| Sphere Thermometer             | IN0085                | 10/22/2024       | 10/22/2025           |
| Room Thermometer               | IN0046                | 10/22/2024       | 10/22/2025           |

REPORT NUMBER: SP1-2504-409-14

**CIE 1931 Chromaticity Diagram**

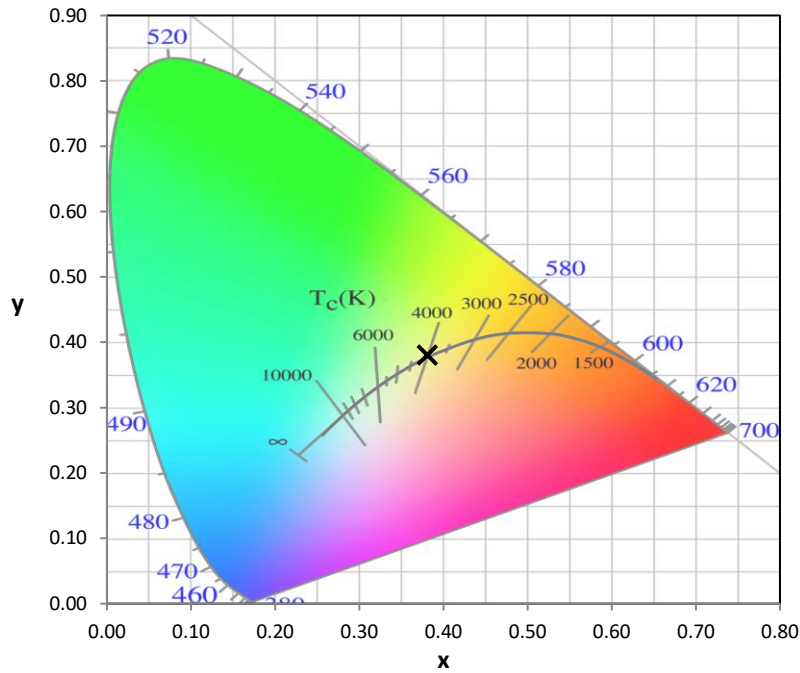


**CIE 1931 Chromaticity Diagram with 2017 ANSI 7-Step and 4-Step Quadrangles**

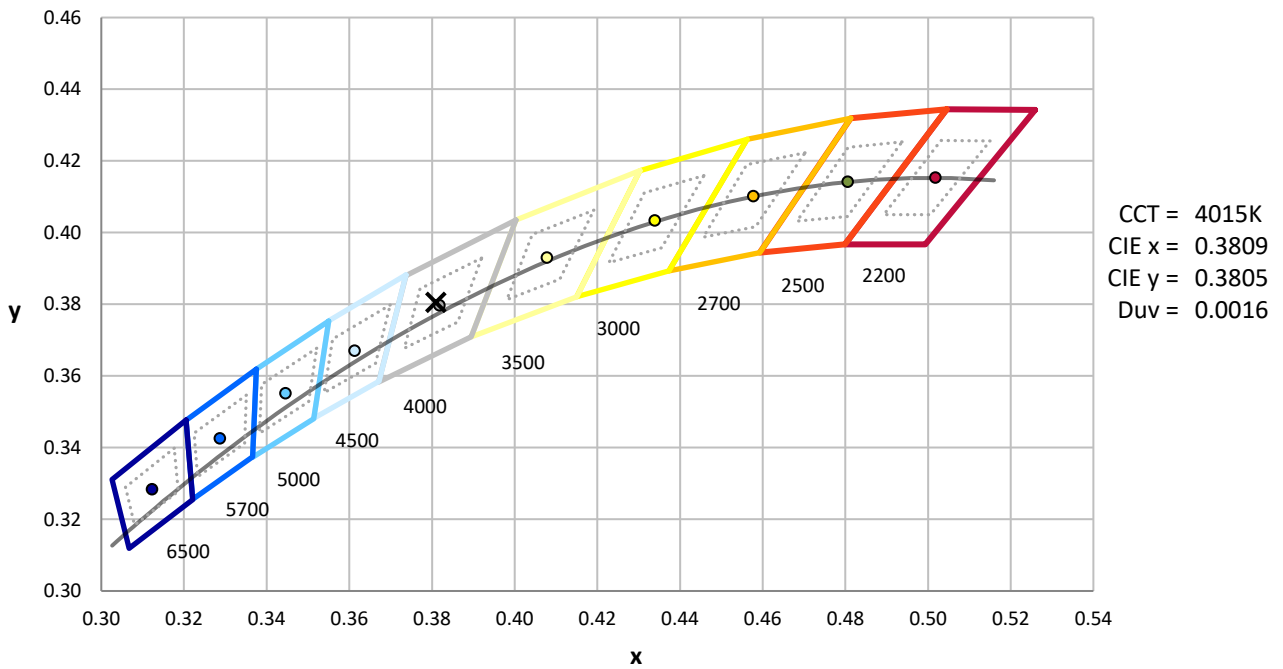

Point lies inside the ANSI 4000K 4-step quadrangle


REPORT NUMBER: SP1-2504-409-14

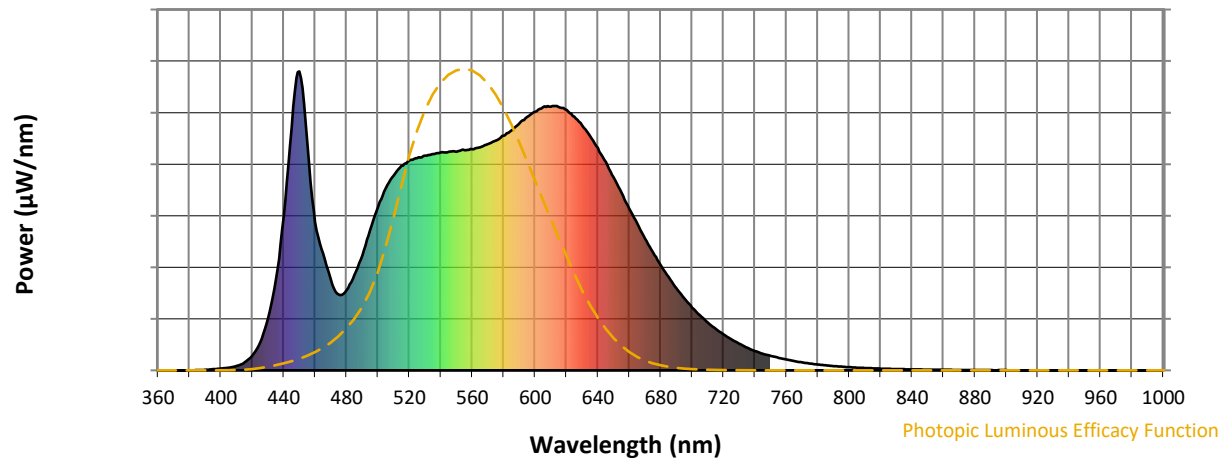**Photopic Flux vs. Wavelength**

**Photopic Lumens: NR**

| λ (nm) | Power W <sup>λ</sup> /nm | Lumens (φ/nm) | λ (nm) | Power W <sup>λ</sup> /nm | Lumens (φ/nm) | λ (nm) | Power W <sup>λ</sup> /nm | Lumens (φ/nm) | λ (nm) | Power W <sup>λ</sup> /nm | Lumens (φ/nm) | λ (nm) | Power W <sup>λ</sup> /nm | Lumens (φ/nm) |
|--------|--------------------------|---------------|--------|--------------------------|---------------|--------|--------------------------|---------------|--------|--------------------------|---------------|--------|--------------------------|---------------|
| 360    | 0                        | NR            | 490    | 385                      | NR            | 620    | 871                      | NR            | 750    | 49                       | NR            | 880    | 1                        | NR            |
| 365    | 0                        | NR            | 495    | 468                      | NR            | 625    | 849                      | NR            | 755    | 42                       | NR            | 885    | 1                        | NR            |
| 370    | 0                        | NR            | 500    | 547                      | NR            | 630    | 819                      | NR            | 760    | 36                       | NR            | 890    | 1                        | NR            |
| 375    | 0                        | NR            | 505    | 609                      | NR            | 635    | 784                      | NR            | 765    | 31                       | NR            | 895    | 1                        | NR            |
| 380    | 0                        | NR            | 510    | 652                      | NR            | 640    | 744                      | NR            | 770    | 27                       | NR            | 900    | 1                        | NR            |
| 385    | 1                        | NR            | 515    | 684                      | NR            | 645    | 697                      | NR            | 775    | 23                       | NR            | 905    | 0                        | NR            |
| 390    | 2                        | NR            | 520    | 702                      | NR            | 650    | 645                      | NR            | 780    | 20                       | NR            | 910    | 0                        | NR            |
| 395    | 4                        | NR            | 525    | 710                      | NR            | 655    | 594                      | NR            | 785    | 17                       | NR            | 915    | 0                        | NR            |
| 400    | 6                        | NR            | 530    | 718                      | NR            | 660    | 541                      | NR            | 790    | 14                       | NR            | 920    | 0                        | NR            |
| 405    | 9                        | NR            | 535    | 723                      | NR            | 665    | 491                      | NR            | 795    | 12                       | NR            | 925    | 0                        | NR            |
| 410    | 15                       | NR            | 540    | 729                      | NR            | 670    | 441                      | NR            | 800    | 11                       | NR            | 930    | 0                        | NR            |
| 415    | 26                       | NR            | 545    | 731                      | NR            | 675    | 395                      | NR            | 805    | 9                        | NR            | 935    | 0                        | NR            |
| 420    | 49                       | NR            | 550    | 731                      | NR            | 680    | 352                      | NR            | 810    | 8                        | NR            | 940    | 0                        | NR            |
| 425    | 95                       | NR            | 555    | 736                      | NR            | 685    | 312                      | NR            | 815    | 7                        | NR            | 945    | 0                        | NR            |
| 430    | 173                      | NR            | 560    | 740                      | NR            | 690    | 275                      | NR            | 820    | 6                        | NR            | 950    | 0                        | NR            |
| 435    | 305                      | NR            | 565    | 746                      | NR            | 695    | 241                      | NR            | 825    | 5                        | NR            | 955    | 0                        | NR            |
| 440    | 511                      | NR            | 570    | 757                      | NR            | 700    | 210                      | NR            | 830    | 4                        | NR            | 960    | 0                        | NR            |
| 445    | 811                      | NR            | 575    | 768                      | NR            | 705    | 184                      | NR            | 835    | 4                        | NR            | 965    | 0                        | NR            |
| 450    | 1000                     | NR            | 580    | 785                      | NR            | 710    | 159                      | NR            | 840    | 3                        | NR            | 970    | 0                        | NR            |
| 455    | 760                      | NR            | 585    | 803                      | NR            | 715    | 139                      | NR            | 845    | 3                        | NR            | 975    | 0                        | NR            |
| 460    | 496                      | NR            | 590    | 826                      | NR            | 720    | 120                      | NR            | 850    | 3                        | NR            | 980    | 0                        | NR            |
| 465    | 392                      | NR            | 595    | 848                      | NR            | 725    | 104                      | NR            | 855    | 2                        | NR            | 985    | 0                        | NR            |
| 470    | 302                      | NR            | 600    | 865                      | NR            | 730    | 89                       | NR            | 860    | 2                        | NR            | 990    | 0                        | NR            |
| 475    | 253                      | NR            | 605    | 879                      | NR            | 735    | 76                       | NR            | 865    | 2                        | NR            | 995    | 0                        | NR            |
| 480    | 269                      | NR            | 610    | 882                      | NR            | 740    | 65                       | NR            | 870    | 1                        | NR            | 1000   | 0                        | NR            |
| 485    | 319                      | NR            | 615    | 881                      | NR            | 745    | 55                       | NR            | 875    | 1                        | NR            |        |                          |               |

REPORT NUMBER: SP1-2504-409-14
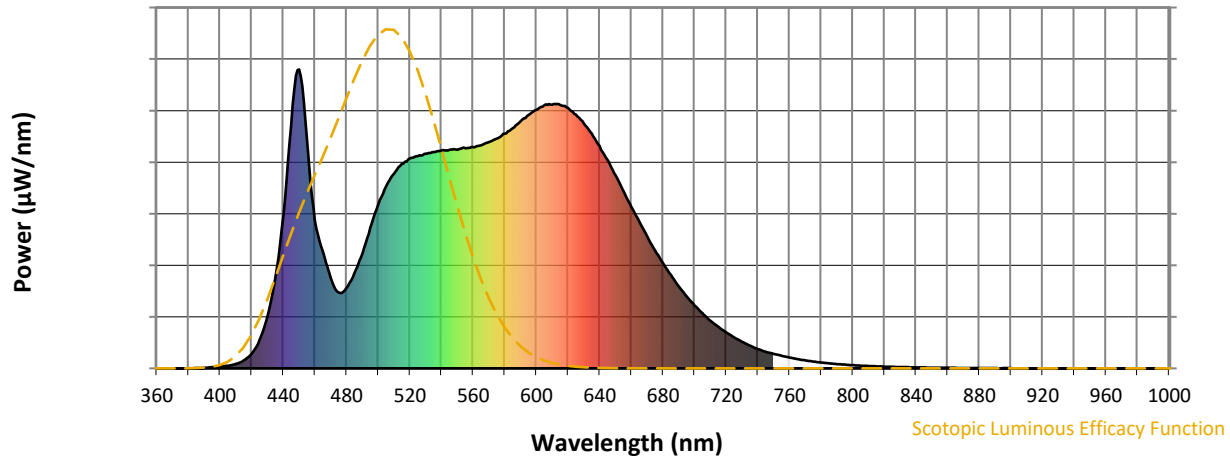
### Scotopic Flux vs. Wavelength




Scotopic Lumens: NR

S/P: 1.77

| λ<br>(nm) | Power<br>W <sup>λ</sup> /nm | Lumens<br>(Φ/nm) | λ<br>(nm) | Power<br>W <sup>λ</sup> /nm | Lumens<br>(Φ/nm) | λ<br>(nm) | Power<br>W <sup>λ</sup> /nm | Lumens<br>(Φ/nm) | λ<br>(nm) | Power<br>W <sup>λ</sup> /nm | Lumens<br>(Φ/nm) | λ<br>(nm) | Power<br>W <sup>λ</sup> /nm | Lumens<br>(Φ/nm) |
|-----------|-----------------------------|------------------|-----------|-----------------------------|------------------|-----------|-----------------------------|------------------|-----------|-----------------------------|------------------|-----------|-----------------------------|------------------|
| 360       | 0                           | NR               | 490       | 385                         | NR               | 620       | 871                         | NR               | 750       | 49                          | NR               | 880       | 1                           | NR               |
| 365       | 0                           | NR               | 495       | 468                         | NR               | 625       | 849                         | NR               | 755       | 42                          | NR               | 885       | 1                           | NR               |
| 370       | 0                           | NR               | 500       | 547                         | NR               | 630       | 819                         | NR               | 760       | 36                          | NR               | 890       | 1                           | NR               |
| 375       | 0                           | NR               | 505       | 609                         | NR               | 635       | 784                         | NR               | 765       | 31                          | NR               | 895       | 1                           | NR               |
| 380       | 0                           | NR               | 510       | 652                         | NR               | 640       | 744                         | NR               | 770       | 27                          | NR               | 900       | 1                           | NR               |
| 385       | 1                           | NR               | 515       | 684                         | NR               | 645       | 697                         | NR               | 775       | 23                          | NR               | 905       | 0                           | NR               |
| 390       | 2                           | NR               | 520       | 702                         | NR               | 650       | 645                         | NR               | 780       | 20                          | NR               | 910       | 0                           | NR               |
| 395       | 4                           | NR               | 525       | 710                         | NR               | 655       | 594                         | NR               | 785       | 17                          | NR               | 915       | 0                           | NR               |
| 400       | 6                           | NR               | 530       | 718                         | NR               | 660       | 541                         | NR               | 790       | 14                          | NR               | 920       | 0                           | NR               |
| 405       | 9                           | NR               | 535       | 723                         | NR               | 665       | 491                         | NR               | 795       | 12                          | NR               | 925       | 0                           | NR               |
| 410       | 15                          | NR               | 540       | 729                         | NR               | 670       | 441                         | NR               | 800       | 11                          | NR               | 930       | 0                           | NR               |
| 415       | 26                          | NR               | 545       | 731                         | NR               | 675       | 395                         | NR               | 805       | 9                           | NR               | 935       | 0                           | NR               |
| 420       | 49                          | NR               | 550       | 731                         | NR               | 680       | 352                         | NR               | 810       | 8                           | NR               | 940       | 0                           | NR               |
| 425       | 95                          | NR               | 555       | 736                         | NR               | 685       | 312                         | NR               | 815       | 7                           | NR               | 945       | 0                           | NR               |
| 430       | 173                         | NR               | 560       | 740                         | NR               | 690       | 275                         | NR               | 820       | 6                           | NR               | 950       | 0                           | NR               |
| 435       | 305                         | NR               | 565       | 746                         | NR               | 695       | 241                         | NR               | 825       | 5                           | NR               | 955       | 0                           | NR               |
| 440       | 511                         | NR               | 570       | 757                         | NR               | 700       | 210                         | NR               | 830       | 4                           | NR               | 960       | 0                           | NR               |
| 445       | 811                         | NR               | 575       | 768                         | NR               | 705       | 184                         | NR               | 835       | 4                           | NR               | 965       | 0                           | NR               |
| 450       | 1000                        | NR               | 580       | 785                         | NR               | 710       | 159                         | NR               | 840       | 3                           | NR               | 970       | 0                           | NR               |
| 455       | 760                         | NR               | 585       | 803                         | NR               | 715       | 139                         | NR               | 845       | 3                           | NR               | 975       | 0                           | NR               |
| 460       | 496                         | NR               | 590       | 826                         | NR               | 720       | 120                         | NR               | 850       | 3                           | NR               | 980       | 0                           | NR               |
| 465       | 392                         | NR               | 595       | 848                         | NR               | 725       | 104                         | NR               | 855       | 2                           | NR               | 985       | 0                           | NR               |
| 470       | 302                         | NR               | 600       | 865                         | NR               | 730       | 89                          | NR               | 860       | 2                           | NR               | 990       | 0                           | NR               |
| 475       | 253                         | NR               | 605       | 879                         | NR               | 735       | 76                          | NR               | 865       | 2                           | NR               | 995       | 0                           | NR               |
| 480       | 269                         | NR               | 610       | 882                         | NR               | 740       | 65                          | NR               | 870       | 1                           | NR               | 1000      | 0                           | NR               |
| 485       | 319                         | NR               | 615       | 881                         | NR               | 745       | 55                          | NR               | 875       | 1                           | NR               |           |                             |                  |

REPORT NUMBER: SP1-2504-409-14

### Melanopic Flux vs. Wavelength

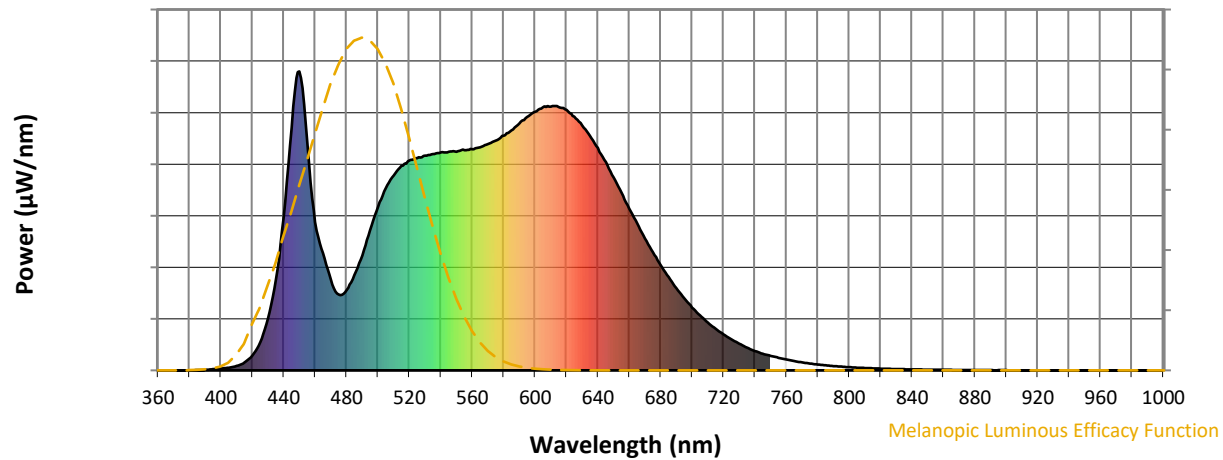

Melanopic Lumens: NR

M/P: 3.62


| λ (nm) | Power W <sup>^</sup> /nm | Lumens (φ/nm) | λ (nm) | Power W <sup>^</sup> /nm | Lumens (φ/nm) | λ (nm) | Power W <sup>^</sup> /nm | Lumens (φ/nm) | λ (nm) | Power W <sup>^</sup> /nm | Lumens (φ/nm) | λ (nm) | Power W <sup>^</sup> /nm | Lumens (φ/nm) |
|--------|--------------------------|---------------|--------|--------------------------|---------------|--------|--------------------------|---------------|--------|--------------------------|---------------|--------|--------------------------|---------------|
| 360    | 0                        | NR            | 490    | 385                      | NR            | 620    | 871                      | NR            | 750    | 49                       | NR            | 880    | 1                        | NR            |
| 365    | 0                        | NR            | 495    | 468                      | NR            | 625    | 849                      | NR            | 755    | 42                       | NR            | 885    | 1                        | NR            |
| 370    | 0                        | NR            | 500    | 547                      | NR            | 630    | 819                      | NR            | 760    | 36                       | NR            | 890    | 1                        | NR            |
| 375    | 0                        | NR            | 505    | 609                      | NR            | 635    | 784                      | NR            | 765    | 31                       | NR            | 895    | 1                        | NR            |
| 380    | 0                        | NR            | 510    | 652                      | NR            | 640    | 744                      | NR            | 770    | 27                       | NR            | 900    | 1                        | NR            |
| 385    | 1                        | NR            | 515    | 684                      | NR            | 645    | 697                      | NR            | 775    | 23                       | NR            | 905    | 0                        | NR            |
| 390    | 2                        | NR            | 520    | 702                      | NR            | 650    | 645                      | NR            | 780    | 20                       | NR            | 910    | 0                        | NR            |
| 395    | 4                        | NR            | 525    | 710                      | NR            | 655    | 594                      | NR            | 785    | 17                       | NR            | 915    | 0                        | NR            |
| 400    | 6                        | NR            | 530    | 718                      | NR            | 660    | 541                      | NR            | 790    | 14                       | NR            | 920    | 0                        | NR            |
| 405    | 9                        | NR            | 535    | 723                      | NR            | 665    | 491                      | NR            | 795    | 12                       | NR            | 925    | 0                        | NR            |
| 410    | 15                       | NR            | 540    | 729                      | NR            | 670    | 441                      | NR            | 800    | 11                       | NR            | 930    | 0                        | NR            |
| 415    | 26                       | NR            | 545    | 731                      | NR            | 675    | 395                      | NR            | 805    | 9                        | NR            | 935    | 0                        | NR            |
| 420    | 49                       | NR            | 550    | 731                      | NR            | 680    | 352                      | NR            | 810    | 8                        | NR            | 940    | 0                        | NR            |
| 425    | 95                       | NR            | 555    | 736                      | NR            | 685    | 312                      | NR            | 815    | 7                        | NR            | 945    | 0                        | NR            |
| 430    | 173                      | NR            | 560    | 740                      | NR            | 690    | 275                      | NR            | 820    | 6                        | NR            | 950    | 0                        | NR            |
| 435    | 305                      | NR            | 565    | 746                      | NR            | 695    | 241                      | NR            | 825    | 5                        | NR            | 955    | 0                        | NR            |
| 440    | 511                      | NR            | 570    | 757                      | NR            | 700    | 210                      | NR            | 830    | 4                        | NR            | 960    | 0                        | NR            |
| 445    | 811                      | NR            | 575    | 768                      | NR            | 705    | 184                      | NR            | 835    | 4                        | NR            | 965    | 0                        | NR            |
| 450    | 1000                     | NR            | 580    | 785                      | NR            | 710    | 159                      | NR            | 840    | 3                        | NR            | 970    | 0                        | NR            |
| 455    | 760                      | NR            | 585    | 803                      | NR            | 715    | 139                      | NR            | 845    | 3                        | NR            | 975    | 0                        | NR            |
| 460    | 496                      | NR            | 590    | 826                      | NR            | 720    | 120                      | NR            | 850    | 3                        | NR            | 980    | 0                        | NR            |
| 465    | 392                      | NR            | 595    | 848                      | NR            | 725    | 104                      | NR            | 855    | 2                        | NR            | 985    | 0                        | NR            |
| 470    | 302                      | NR            | 600    | 865                      | NR            | 730    | 89                       | NR            | 860    | 2                        | NR            | 990    | 0                        | NR            |
| 475    | 253                      | NR            | 605    | 879                      | NR            | 735    | 76                       | NR            | 865    | 2                        | NR            | 995    | 0                        | NR            |
| 480    | 269                      | NR            | 610    | 882                      | NR            | 740    | 65                       | NR            | 870    | 1                        | NR            | 1000   | 0                        | NR            |
| 485    | 319                      | NR            | 615    | 881                      | NR            | 745    | 55                       | NR            | 875    | 1                        | NR            |        |                          |               |

REPORT NUMBER: SP1-2504-409-14





TM-30-18

### Summary

$R_f = 91.5$   
 $R_g = 100.3$   
 CIE  $R_a = 92.3$   
 $R_g = 58.4$

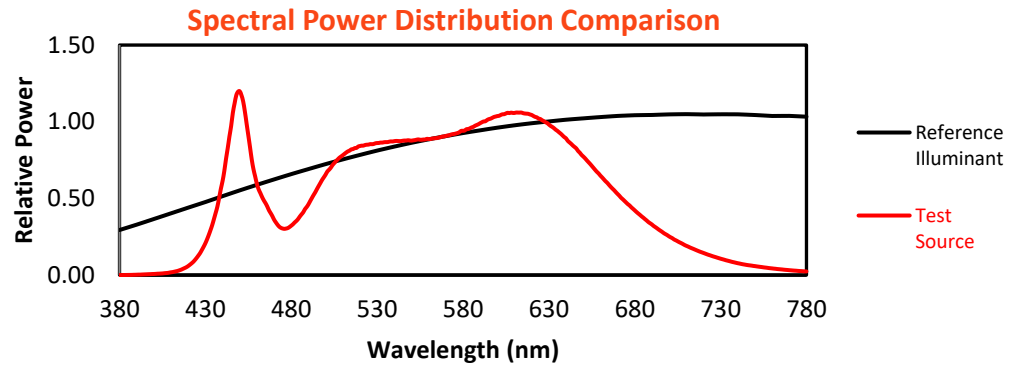





### Color Vector Graphics

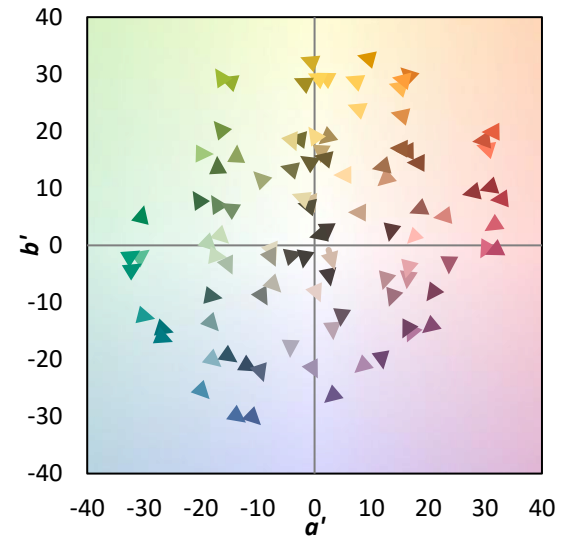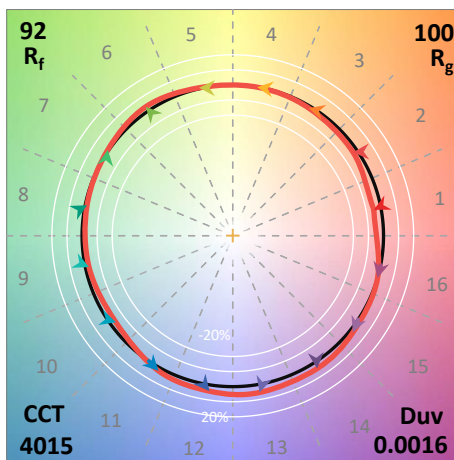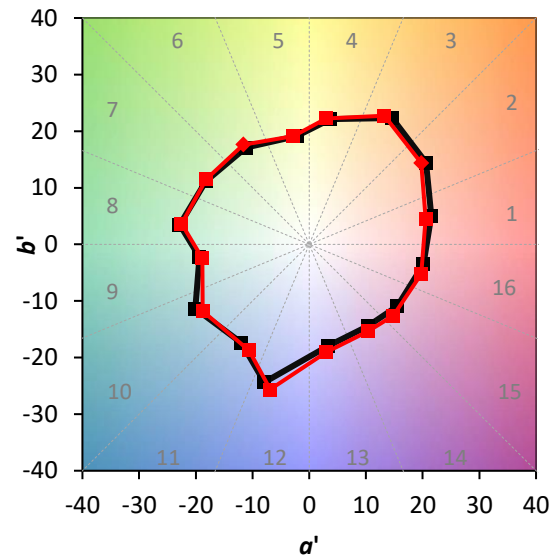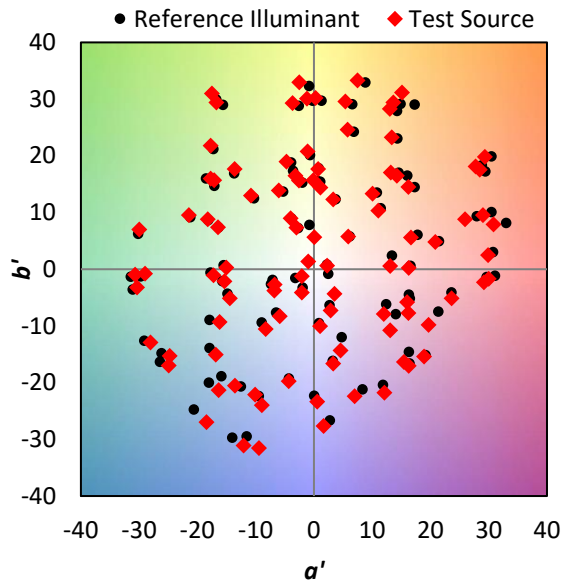

**Individual Sample Fidelity Index ( $R_{f,i}$ )**



|            |            |            |            |
|------------|------------|------------|------------|
| CES01 = 85 | CES26 = 91 | CES51 = 99 | CES76 = 84 |
| CES02 = 61 | CES27 = 93 | CES52 = 97 | CES77 = 88 |
| CES03 = 31 | CES28 = 95 | CES53 = 95 | CES78 = 80 |
| CES04 = 69 | CES29 = 92 | CES54 = 96 | CES79 = 96 |
| CES05 = 49 | CES30 = 99 | CES55 = 95 | CES80 = 92 |
| CES06 = 50 | CES31 = 93 | CES56 = 94 | CES81 = 89 |
| CES07 = 42 | CES32 = 88 | CES57 = 94 | CES82 = 96 |
| CES08 = 41 | CES33 = 95 | CES58 = 94 | CES83 = 97 |
| CES09 = 29 | CES34 = 92 | CES59 = 98 | CES84 = 94 |
| CES10 = 74 | CES35 = 95 | CES60 = 94 | CES85 = 84 |
| CES11 = 57 | CES36 = 85 | CES61 = 94 | CES86 = 87 |
| CES12 = 63 | CES37 = 94 | CES62 = 92 | CES87 = 91 |
| CES13 = 43 | CES38 = 94 | CES63 = 92 | CES88 = 96 |
| CES14 = 74 | CES39 = 98 | CES64 = 93 | CES89 = 87 |
| CES15 = 71 | CES40 = 94 | CES65 = 88 | CES90 = 97 |
| CES16 = 47 | CES41 = 99 | CES66 = 90 | CES91 = 75 |
| CES17 = 49 | CES42 = 91 | CES67 = 89 | CES92 = 79 |
| CES18 = 56 | CES43 = 91 | CES68 = 89 | CES93 = 88 |
| CES19 = 71 | CES44 = 99 | CES69 = 91 | CES94 = 80 |
| CES20 = 66 | CES45 = 94 | CES70 = 86 | CES95 = 83 |
| CES21 = 85 | CES46 = 95 | CES71 = 81 | CES96 = 91 |
| CES22 = 78 | CES47 = 95 | CES72 = 94 | CES97 = 93 |
| CES23 = 91 | CES48 = 95 | CES73 = 79 | CES98 = 93 |
| CES24 = 90 | CES49 = 93 | CES74 = 94 | CES99 = 91 |
| CES25 = 71 | CES50 = 99 | CES75 = 81 |            |

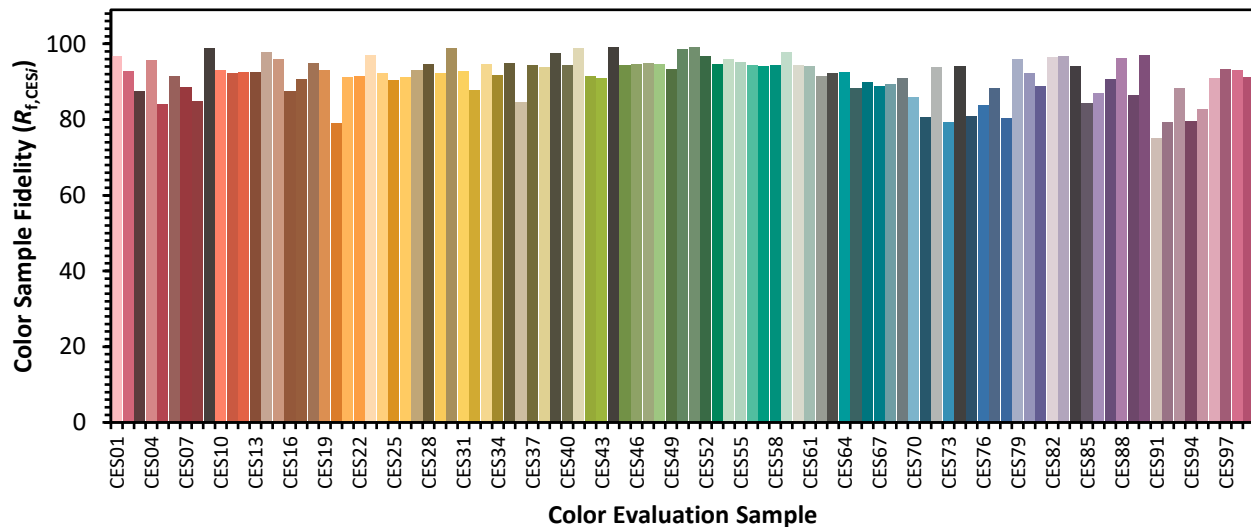

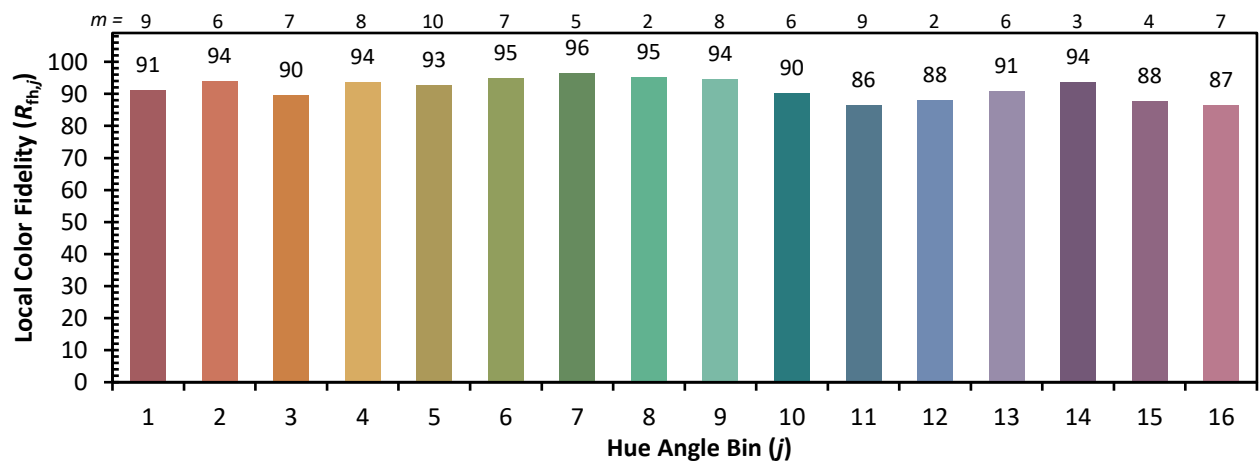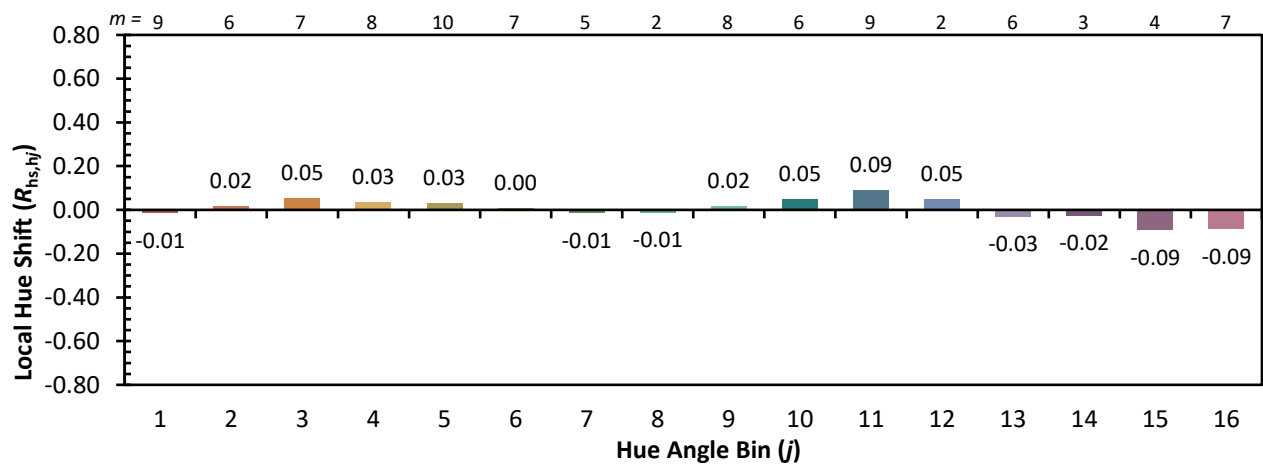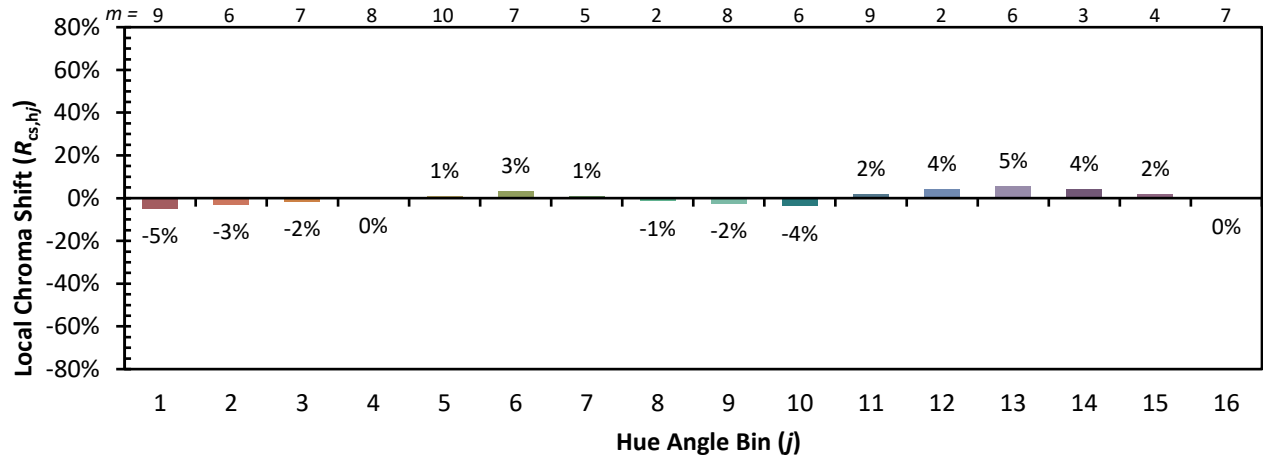**Color Rendition by Hue-Angle Bin**




**Measure Comparisons**

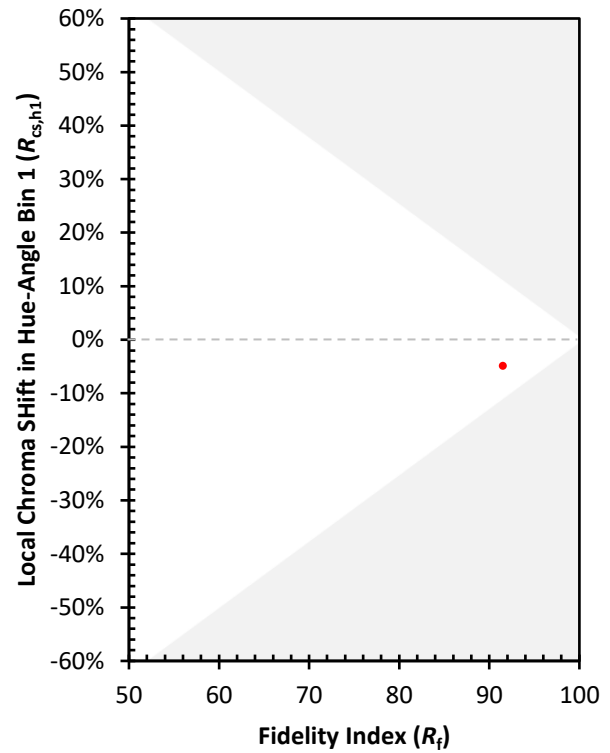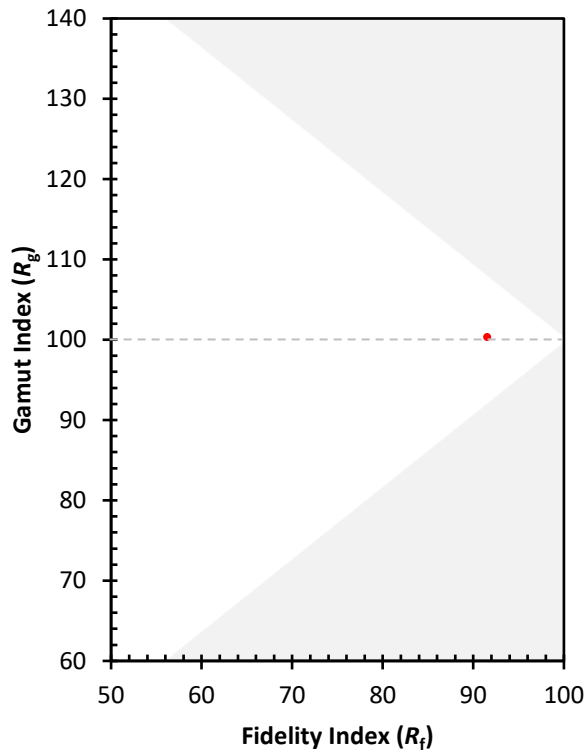

(END OF REPORT)