

Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for
Cooper Lighting Solutions

Brand: IRiS

Report Number: P1262774

Luminaire Tested: P3A13R459727DE010 E3DLD1LI

Issue Date: 1/30/2026

Test Information

Test Method: LM-79-2019
Report Number: P1262774
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2601-647-26)
Test Lab: INNOVATION CENTER
Issue Date: 1/30/2026
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: IRiS
Catalog Number: P3A13R459727DE010 E3DLD1LI
Description: 3in Adjustable LED luminaire with, R45 optic, 2700K CCT AND, 97CRI , E3DLD1LI TRIM
Light Source: -
Ballast/Driver: -

Summary


Lumens per Lamp: N/A
Luminaire Lumens: 706.0 lumens
Efficiency: N/A
Efficacy: 48.4 lumens/watt
Spacing Criteria (0/90/45): 0.84 / 0.84 / 0.92
Luminous Opening: Circular (Dia: 0.25' x H: 0')
CIE Type: Direct

Input Watts (W): 14.6
Input Voltage (V): NR
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT

TEST NUMBER: P1262774

CATALOG NUMBER: P3A13R459727DE010 E3DLD1LI

Luminous Intensity Polar Plot

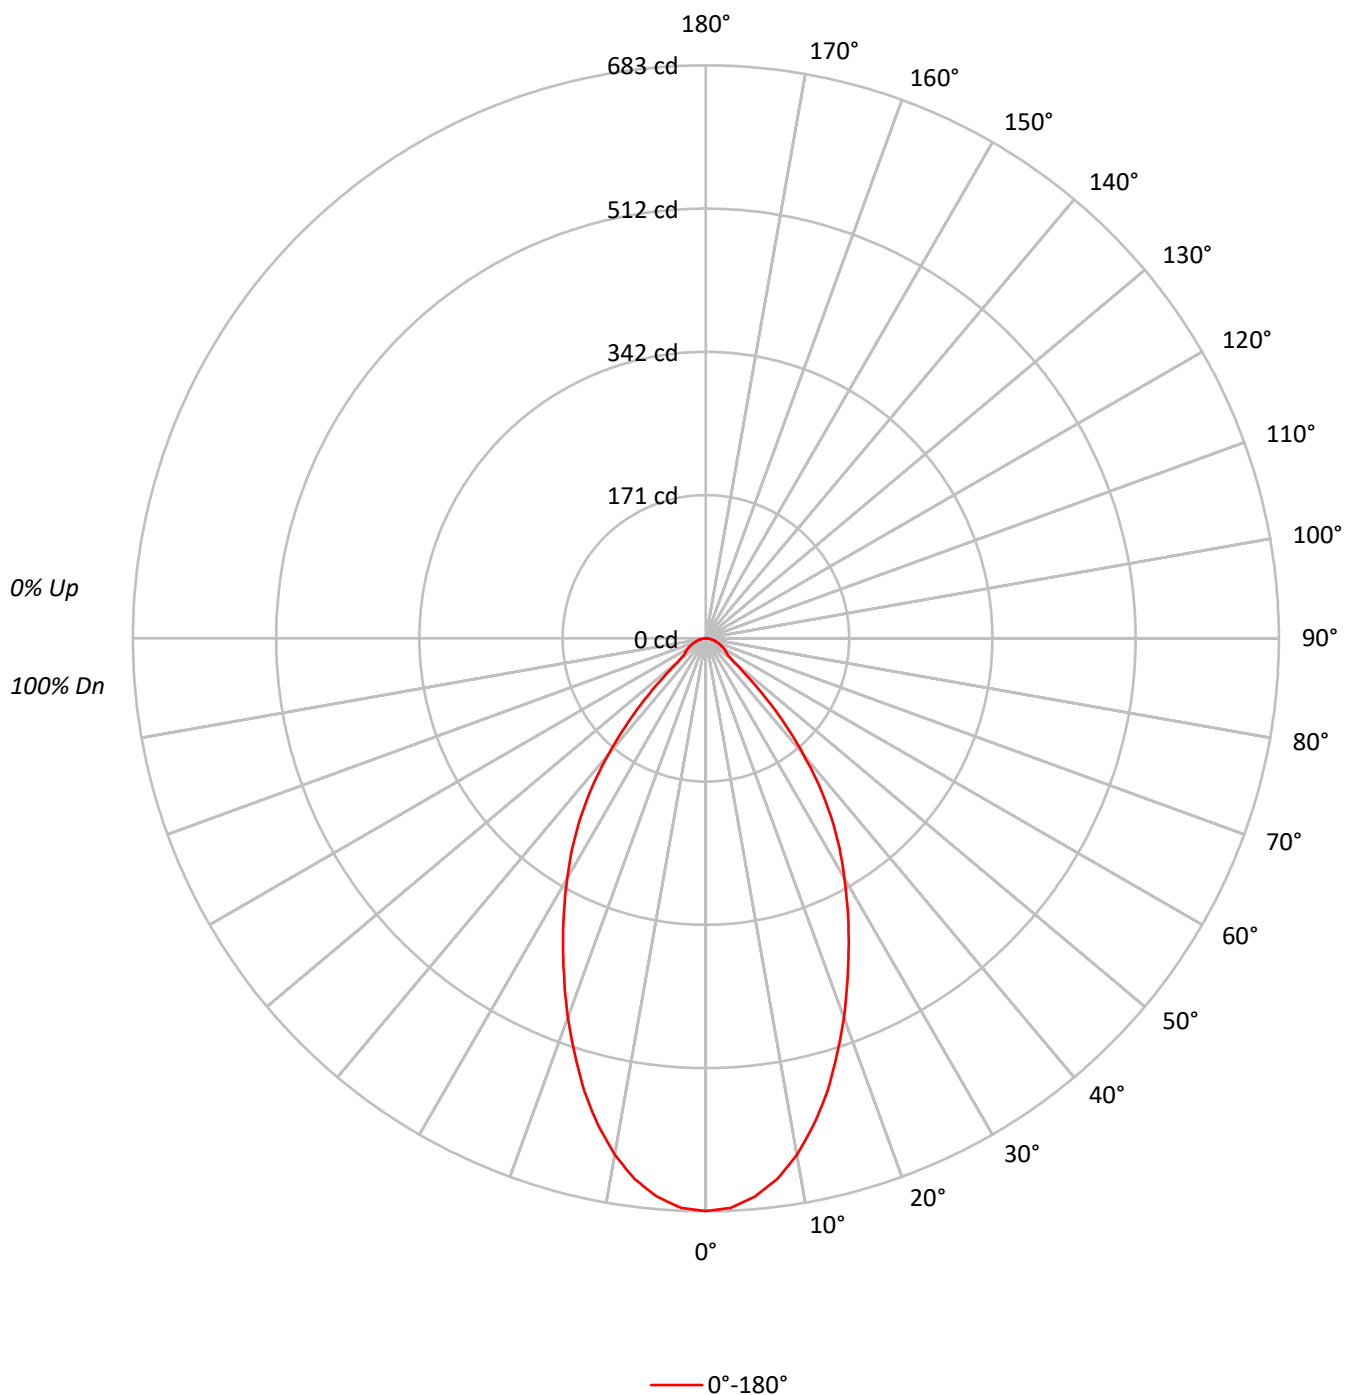

TEST NUMBER: P1262774

CATALOG NUMBER: P3A13R459727DE010 E3DLD1LI

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20					20					20					20
RC	80				70					50					30					10
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10
RCR																				
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100		
1	112	109	106	104	110	107	104	102	103	101	99	99	97	96	96	94	93	91		
2	106	100	95	91	103	98	94	90	95	91	88	92	89	86	89	87	85	83		
3	99	92	86	82	97	90	85	81	88	83	80	85	81	78	83	80	77	75		
4	94	85	78	74	92	84	78	73	81	76	72	79	75	71	77	74	71	69		
5	88	79	72	67	86	78	71	67	76	70	66	74	69	65	72	68	65	63		
6	83	73	66	61	81	72	66	61	71	65	61	69	64	60	68	63	60	58		
7	78	68	61	57	77	67	61	56	66	60	56	65	60	56	64	59	55	54		
8	74	64	57	52	73	63	57	52	62	56	52	61	56	52	60	55	52	50		
9	70	60	53	49	69	59	53	49	58	52	48	57	52	48	56	52	48	47		
10	67	56	50	45	66	56	49	45	55	49	45	54	49	45	53	48	45	44		

AVERAGE LUMINANCE (cd/sqm):

	0°
0°	149681
5°	147039
10°	139142
15°	126902
20°	112220
25°	97433
30°	83633
35°	69707
40°	51926
45°	31786
50°	14703
55°	11507
60°	11052
65°	10118
70°	9361
75°	8981
80°	8208
85°	6038

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 0°

Vertical Angle: 45°

Luminance: 31786 cd/sqm

TEST NUMBER: P1262774

CATALOG NUMBER: P3A13R459727DE010 E3DLD1LI

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	62.4	8.8
10°-20°	155.6	22.0
20°-30°	184.9	26.2
30°-40°	160.7	22.8
40°-50°	80.6	11.4
50°-60°	28.0	4.0
60°-70°	19.6	2.8
70°-80°	10.9	1.5
80°-90°	3.3	0.5
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	402.9	57.1
0°-40°	563.6	79.8
0°-60°	672.1	95.2
0°-90°	706.0	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	706.0	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	683	
5°	668	62
15°	559	156
25°	403	185
35°	260	161
45°	102	81
55°	30	28
65°	20	20
75°	11	11
85°	2	3
90°	0	

TEST NUMBER: P1262774

CATALOG NUMBER: P3A13R459727DE010 E3DLD1LI

CANDELA DISTRIBUTION (FULL):

	0°
0°	682.6
2.5°	679.4
5°	668.0
7.5°	650.1
10°	624.9
12.5°	593.9
15°	559.0
17.5°	519.9
20°	480.9
22.5°	441.0
25°	402.7
27.5°	366.1
30°	330.3
32.5°	296.2
35°	260.4
37.5°	222.1
40°	181.4
42.5°	141.6
45°	102.5
47.5°	67.5
50°	43.1
52.5°	33.4
55°	30.1
57.5°	27.7
60°	25.2
62.5°	22.8
65°	19.5
67.5°	17.1
70°	14.6
72.5°	12.2
75°	10.6
77.5°	8.1
80°	6.5
82.5°	4.9
85°	2.4
87.5°	1.6
90°	0.0

(END OF REPORT)