

Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for
Cooper Lighting Solutions

Brand: IRiS

Report Number: P1262900

Luminaire Tested: P3A13R709727DE010 E3CB1MB

Issue Date: 1/30/2026

Test Information

Test Method: LM-79-2019
Report Number: P1262900
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2601-647-48)
Test Lab: INNOVATION CENTER
Issue Date: 1/30/2026
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: IRiS
Catalog Number: P3A13R709727DE010 E3CB1MB
Description: 3in Adjustable LED luminaire with, R70 optic, 2700K CCT AND, 97CRI , E3CB1MB TRIM
Light Source: -
Ballast/Driver: -


Summary

Lumens per Lamp: N/A
Luminaire Lumens: 1018.0 lumens
Efficiency: N/A
Efficacy: 69.7 lumens/watt
Spacing Criteria (0/90/45): 1.01 / 1.01 / 1.03
Luminous Opening: Circular (Dia: 0.25' x H: 0')
CIE Type: Direct

Input Watts (W): 14.6
Input Voltage (V): NR
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT

TEST NUMBER: P1262900
CATALOG NUMBER: P3A13R709727DE010 E3CB1MB

Luminous Intensity Polar Plot

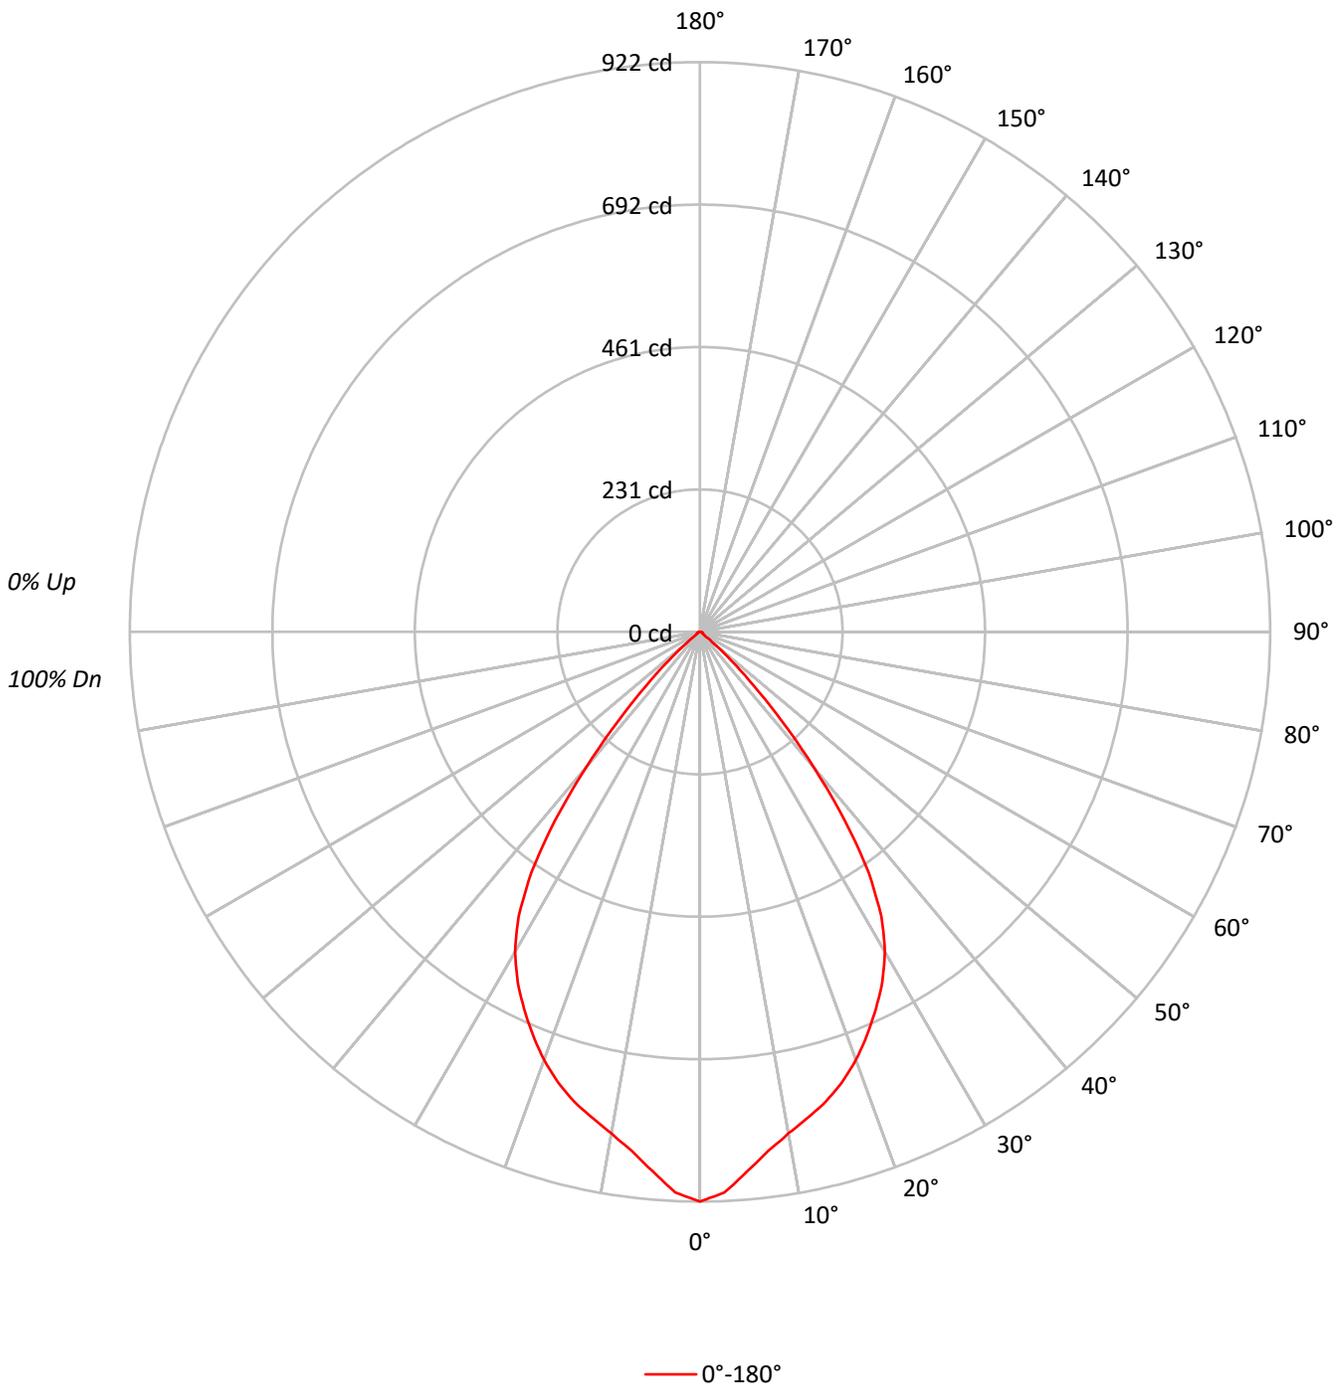



TEST NUMBER: P1262900
 CATALOG NUMBER: P3A13R709727DE010 E3CB1MB

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20				
RC	80				70				50				30				10			0	
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																					
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100	100	100	100
1	113	110	107	105	111	108	106	103	104	102	100	100	99	97	97	96	94	93	93	93	93
2	107	102	97	94	105	100	96	93	97	94	91	94	91	89	91	89	87	85	85	85	85
3	101	94	89	85	99	93	88	84	90	86	83	88	84	81	85	82	80	78	78	78	78
4	95	87	81	77	94	86	81	76	84	79	75	82	78	75	80	77	74	72	72	72	72
5	90	81	75	70	88	80	74	70	78	73	69	77	72	69	75	71	68	66	66	66	66
6	85	75	69	64	83	75	69	64	73	68	64	72	67	63	70	66	63	61	61	61	61
7	80	70	64	59	79	70	64	59	68	63	59	67	62	59	66	62	58	57	57	57	57
8	76	66	59	55	75	65	59	55	64	58	55	63	58	54	62	57	54	53	53	53	53
9	72	62	55	51	71	61	55	51	60	55	51	59	54	50	58	54	50	49	49	49	49
10	68	58	52	47	67	57	51	47	56	51	47	56	51	47	55	50	47	46	46	46	46

AVERAGE LUMINANCE (cd/sqm):

	0°
0°	202155
5°	192890
10°	183519
15°	178616
20°	172028
25°	162808
30°	151416
35°	127207
40°	81982
45°	38112
50°	9995
55°	2485
60°	2500
65°	2127
70°	2116
75°	2033
80°	2020
85°	2013

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 0°
 Vertical Angle: 45°
 Luminance: 38112 cd/sqm



TEST NUMBER: P1262900
 CATALOG NUMBER: P3A13R709727DE010 E3CB1MB

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	82.0	8.1
10°-20°	221.1	21.7
20°-30°	308.9	30.3
30°-40°	286.4	28.1
40°-50°	102.7	10.1
50°-60°	8.7	0.9
60°-70°	4.4	0.4
70°-80°	2.8	0.3
80°-90°	1.1	0.1
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	612.0	60.1
0°-40°	898.4	88.3
0°-60°	1009.8	99.2
0°-90°	1018.0	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	1018.0	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	922	
5°	876	82
15°	787	221
25°	673	309
35°	475	286
45°	123	103
55°	6	9
65°	4	4
75°	2	3
85°	1	1
90°	0	



TEST NUMBER: P1262900
CATALOG NUMBER: P3A13R709727DE010 E3CB1MB

CANDELA DISTRIBUTION (FULL):

	0°
0°	921.9
2.5°	908.0
5°	876.3
7.5°	847.0
10°	824.2
12.5°	805.5
15°	786.8
17.5°	764.0
20°	737.2
22.5°	706.2
25°	672.9
27.5°	638.7
30°	598.0
32.5°	546.0
35°	475.2
37.5°	384.9
40°	286.4
42.5°	195.3
45°	122.9
47.5°	68.3
50°	29.3
52.5°	9.8
55°	6.5
57.5°	5.7
60°	5.7
62.5°	4.9
65°	4.1
67.5°	4.1
70°	3.3
72.5°	3.3
75°	2.4
77.5°	2.4
80°	1.6
82.5°	1.6
85°	0.8
87.5°	0.8
90°	0.0

(END OF REPORT)