

Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for
Cooper Lighting Solutions

Brand: IRiS

Report Number: P1262918

Luminaire Tested: P3A13R709727DE010 E3DLP1H

Issue Date: 1/30/2026

Test Information

Test Method: LM-79-2019
Report Number: P1262918
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2601-647-45)
Test Lab: INNOVATION CENTER
Issue Date: 1/30/2026
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: IRiS
Catalog Number: P3A13R709727DE010 E3DLP1H
Description: 3in Adjustable LED luminaire with, R70 optic, 2700K CCT AND, 97CRI , E3DLP1H TRIM
Light Source: -
Ballast/Driver: -

Summary


Lumens per Lamp: N/A
Luminaire Lumens: 585.0 lumens
Efficiency: N/A
Efficacy: 40.1 lumens/watt
Spacing Criteria (0/90/45): 0.82 / 0.82 / 0.87
Luminous Opening: Circular (Dia: 0.25' x H: 0')
CIE Type: Direct

Input Watts (W): 14.6
Input Voltage (V): NR
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT

TEST NUMBER: P1262918

CATALOG NUMBER: P3A13R709727DE010 E3DLP1H

Luminous Intensity Polar Plot

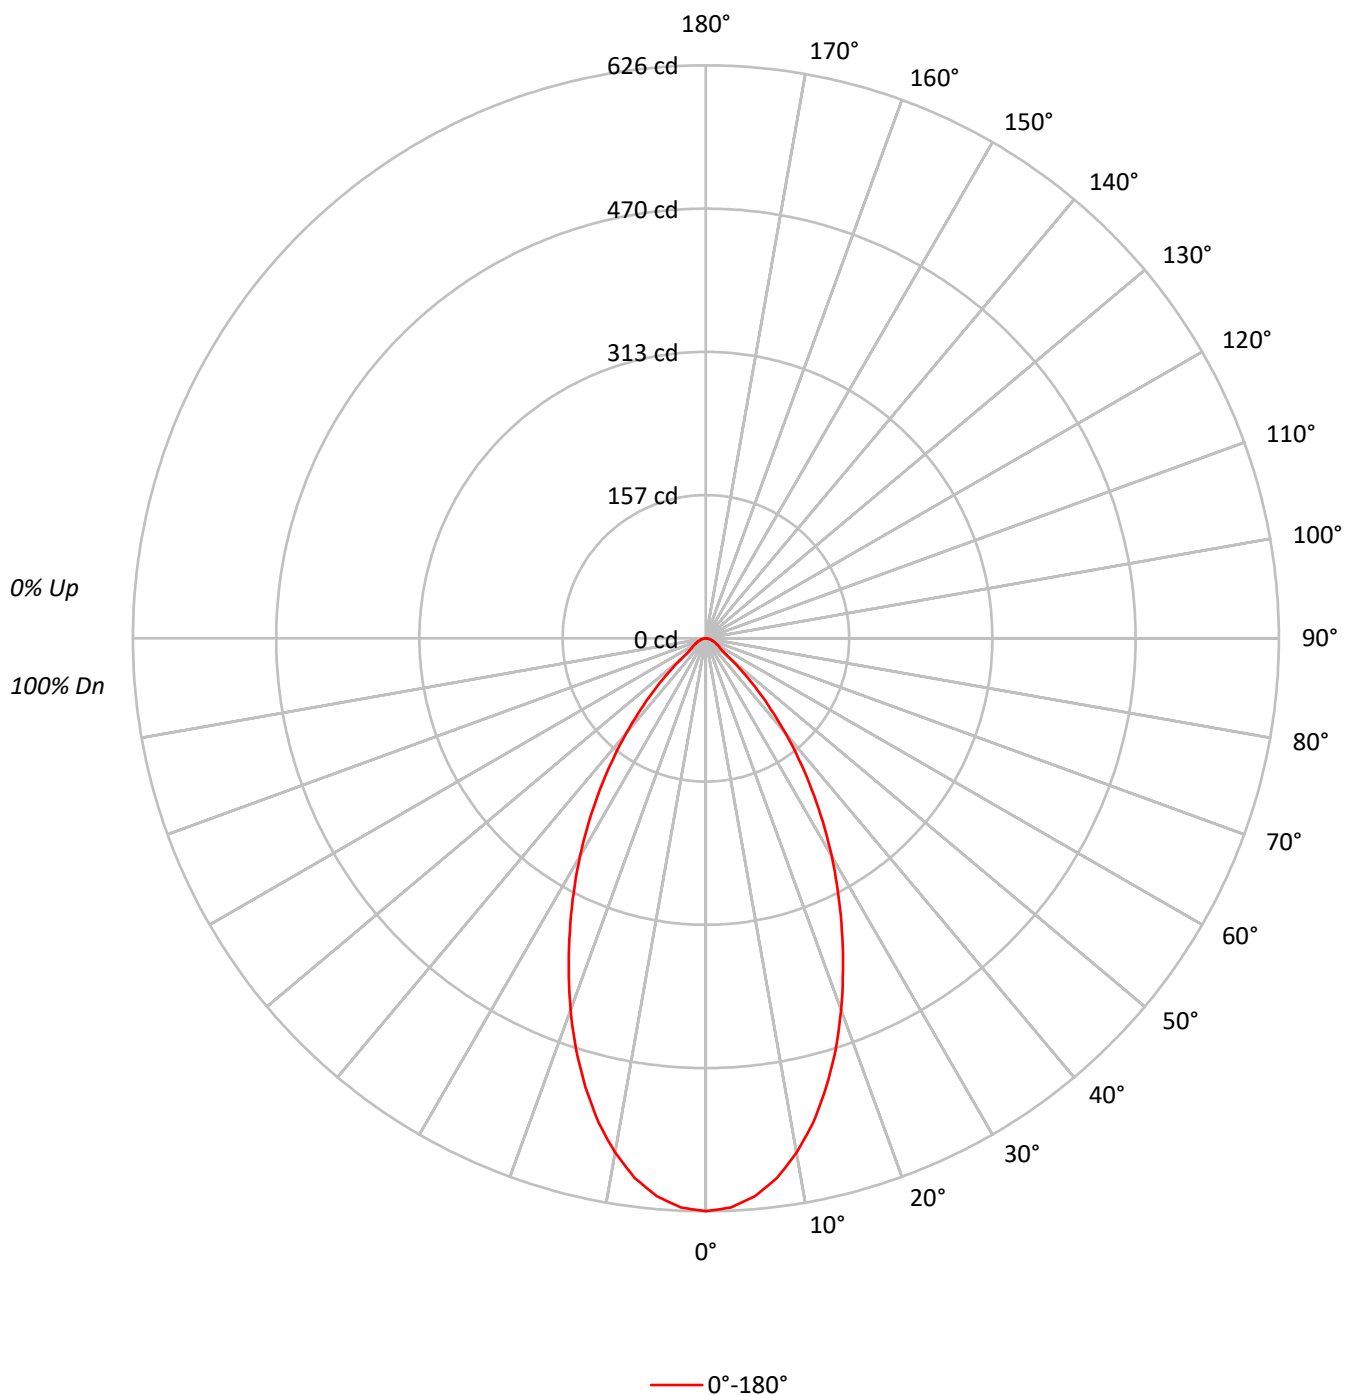

TEST NUMBER: P1262918

CATALOG NUMBER: P3A13R709727DE010 E3DLP1H

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20					20					20					20					20
RC	80					70					30					10					0
RW	70	50	30	10		70	50	30	10		50	30	10		50	30	10		50	30	10
RCR																					
0	119	119	119	119		116	116	116	116		111	111	111		106	106	106		102	102	102
1	113	110	107	104		110	107	105	103		103	101	100		100	98	97		96	95	94
2	106	101	97	93		104	99	95	92		96	93	90		93	90	88		90	88	86
3	100	93	88	83		98	92	87	83		89	85	81		87	83	80		84	81	79
4	95	86	80	76		93	85	80	75		83	78	74		81	77	73		79	76	73
5	89	80	74	69		88	79	73	69		78	72	68		76	71	68		74	70	67
6	85	75	68	64		83	74	68	64		73	67	63		71	66	63		70	65	62
7	80	70	64	59		79	69	63	59		68	62	58		67	62	58		66	61	58
8	76	66	59	55		75	65	59	55		64	58	54		63	58	54		62	57	54
9	72	62	55	51		71	61	55	51		60	55	51		59	54	51		58	54	50
10	69	58	52	48		67	58	52	48		57	51	48		56	51	48		55	51	47

AVERAGE LUMINANCE (cd/sqm):

	0°
0°	137226
5°	134690
10°	127007
15°	115279
20°	100832
25°	85045
30°	69631
35°	54020
40°	38672
45°	24468
50°	12213
55°	7455
60°	6403
65°	5915
70°	5193
75°	4829
80°	4167
85°	4026

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 0°

Vertical Angle: 45°

Luminance: 24468 cd/sqm

TEST NUMBER: P1262918

CATALOG NUMBER: P3A13R709727DE010 E3DLP1H

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	57.1	9.8
10°-20°	141.3	24.2
20°-30°	160.9	27.5
30°-40°	125.8	21.5
40°-50°	61.8	10.6
50°-60°	19.0	3.2
60°-70°	11.3	1.9
70°-80°	6.0	1.0
80°-90°	1.8	0.3
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	359.3	61.4
0°-40°	485.1	82.9
0°-60°	565.9	96.7
0°-90°	585.0	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	585.0	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	626	
5°	612	57
15°	508	141
25°	352	161
35°	202	126
45°	79	62
55°	20	19
65°	11	11
75°	6	6
85°	2	2
90°	0	

TEST NUMBER: P1262918

CATALOG NUMBER: P3A13R709727DE010 E3DLP1H

CANDELA DISTRIBUTION (FULL):

0°	
0°	625.8
2.5°	622.5
5°	611.9
7.5°	594.8
10°	570.4
12.5°	541.9
15°	507.8
17.5°	471.2
20°	432.1
22.5°	391.4
25°	351.5
27.5°	312.5
30°	275.0
32.5°	237.6
35°	201.8
37.5°	167.6
40°	135.1
42.5°	105.0
45°	78.9
47.5°	55.3
50°	35.8
52.5°	23.6
55°	19.5
57.5°	17.1
60°	14.6
62.5°	13.0
65°	11.4
67.5°	9.8
70°	8.1
72.5°	6.5
75°	5.7
77.5°	4.9
80°	3.3
82.5°	2.4
85°	1.6
87.5°	0.8
90°	0.0

(END OF REPORT)