

Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for
Cooper Lighting Solutions

Brand: IRiS

Report Number: P1263365

Luminaire Tested: P3A20R259727D010 E3CD1MMS

Issue Date: 1/30/2026

Test Information

Test Method: LM-79-2019
Report Number: P1263365
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2601-647-12)
Test Lab: INNOVATION CENTER
Issue Date: 1/30/2026
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: IRiS
Catalog Number: P3A20R259727D010 E3CD1MMS
Description: 3in Adjustable LED luminaire with, R25 optic, 2700K CCT AND, 97CRI , E3CD1MMS TRIM
Light Source: -
Ballast/Driver: -


Summary

Lumens per Lamp: N/A
Luminaire Lumens: 1800.9 lumens
Efficiency: N/A
Efficacy: 62.5 lumens/watt
Spacing Criteria (0/90/45): 0.45 / 0.45 / 0.41
Luminous Opening: Circular (Dia: 0.25' x H: 0')
CIE Type: Direct

Input Watts (W): 28.8
Input Voltage (V): NR
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT

TEST NUMBER: P1263365
CATALOG NUMBER: P3A20R259727D010 E3CD1MMS

Luminous Intensity Polar Plot

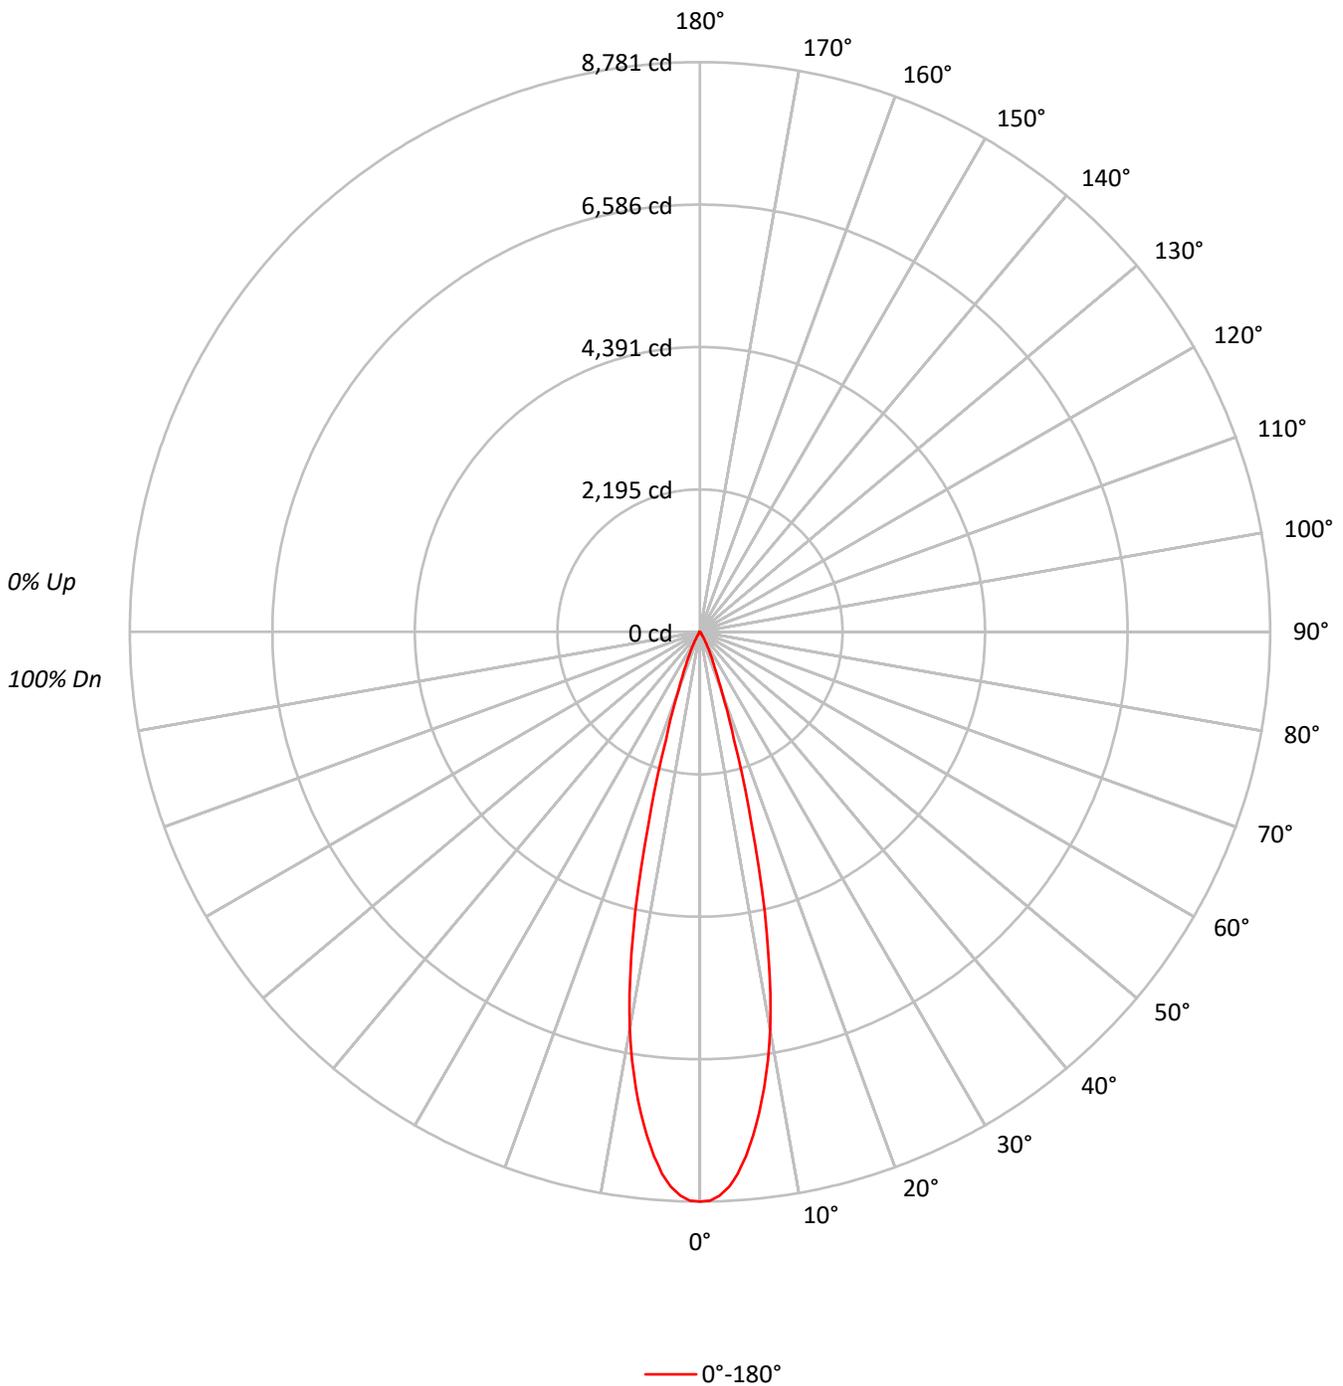



TEST NUMBER: P1263365
 CATALOG NUMBER: P3A20R259727D010 E3CD1MMS

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	713.6	39.6
10°-20°	851.4	47.3
20°-30°	191.9	10.7
30°-40°	31.1	1.7
40°-50°	5.6	0.3
50°-60°	3.0	0.2
60°-70°	2.6	0.1
70°-80°	1.5	0.1
80°-90°	0.2	0.0
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	1756.9	97.6
0°-40°	1788.1	99.3
0°-60°	1796.6	99.8
0°-90°	1800.9	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	1800.9	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	8781	
5°	8113	714
15°	3059	851
25°	375	192
35°	37	31
45°	6	6
55°	3	3
65°	3	3
75°	1	1
85°	0	0
90°	0	



TEST NUMBER: P1263365
CATALOG NUMBER: P3A20R259727D010 E3CD1MMS

CANDELA DISTRIBUTION (FULL):

0°	
0°	8781.1
1°	8767.0
2°	8696.2
3°	8566.0
4°	8369.4
5°	8113.3
6°	7807.6
7°	7476.5
8°	7097.3
9°	6682.8
10°	6220.1
11°	5686.6
12°	5072.6
13°	4430.2
14°	3741.1
15°	3059.1
17.5°	1743.2
20°	977.7
22.5°	590.0
25°	375.0
27.5°	230.6
30°	134.4
32.5°	70.7
35°	36.8
37.5°	24.1
40°	15.6
42.5°	9.9
45°	5.7
47.5°	4.2
50°	4.2
52.5°	4.2
55°	2.8
57.5°	2.8
60°	2.8
62.5°	2.8
65°	2.8
67.5°	2.8
70°	1.4
72.5°	1.4
75°	1.4
77.5°	1.4
80°	1.4
82.5°	0.0
85°	0.0
87.5°	0.0



TEST NUMBER: P1263365
CATALOG NUMBER: P3A20R259727D010 E3CD1MMS

CANDELA DISTRIBUTION (continued):

0°
90° | 0.0

(END OF REPORT)