

Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for
Cooper Lighting Solutions

Brand: IRiS

Report Number: P1263525

Luminaire Tested: P3A20R509727D010 E3DLD1H

Issue Date: 1/30/2026

Test Information

Test Method: LM-79-2019
Report Number: P1263525
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2601-647-30)
Test Lab: INNOVATION CENTER
Issue Date: 1/30/2026
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: IRiS
Catalog Number: P3A20R509727D010 E3DLD1H
Description: 3in Adjustable LED luminaire with, R50 optic, 2700K CCT AND, 97CRI , E3DLD1H TRIM
Light Source: -
Ballast/Driver: -

Summary


Lumens per Lamp: N/A
Luminaire Lumens: 1240.0 lumens
Efficiency: N/A
Efficacy: 43.1 lumens/watt
Spacing Criteria (0/90/45): 0.88 / 0.88 / 0.93
Luminous Opening: Circular (Dia: 0.25' x H: 0')
CIE Type: Direct

Input Watts (W): 28.8
Input Voltage (V): NR
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT

TEST NUMBER: P1263525

CATALOG NUMBER: P3A20R509727D010 E3DLD1H

Luminous Intensity Polar Plot

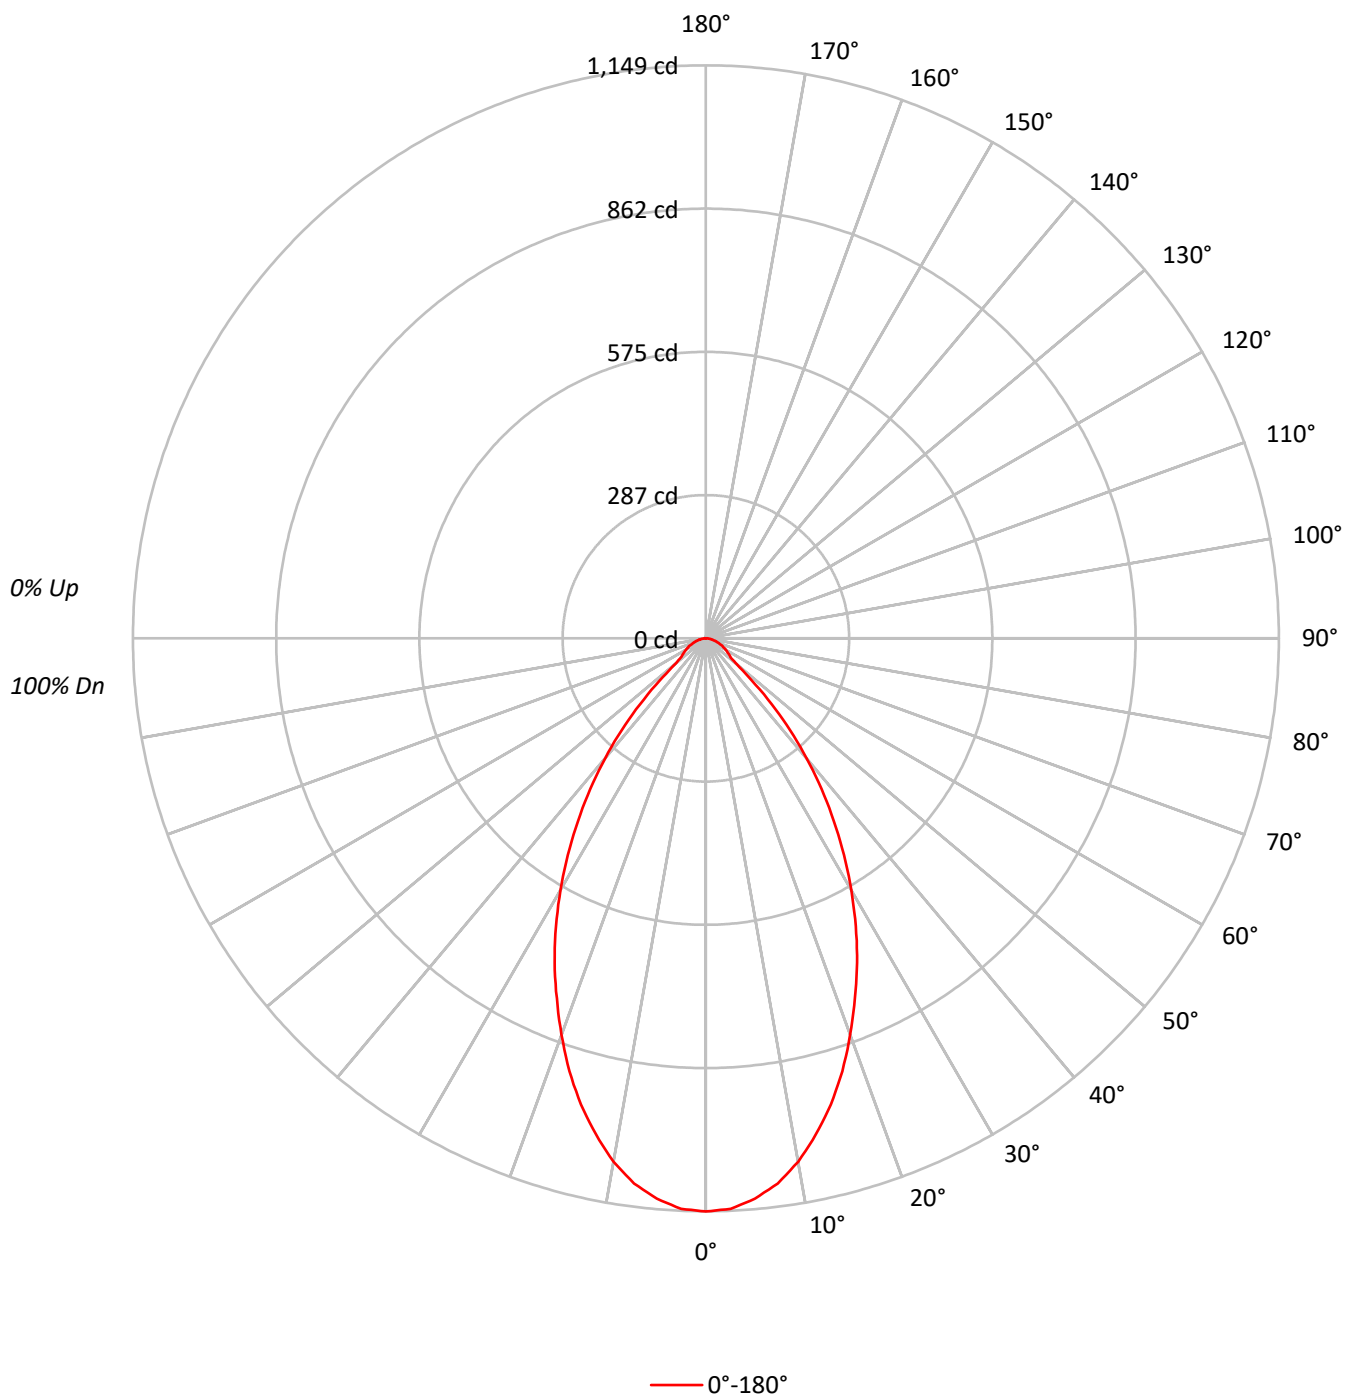

TEST NUMBER: P1263525

CATALOG NUMBER: P3A20R509727D010 E3DLD1H

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20					20					20					20
RC	80				70					50					30					10
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10
RCR																				
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100		
1	112	109	106	103	110	107	104	102	103	101	99	99	97	96	95	94	93	91		
2	106	100	95	91	103	98	94	90	95	91	88	92	89	86	89	86	84	83		
3	99	92	86	81	97	90	85	81	88	83	79	85	81	78	83	80	77	75		
4	93	85	78	73	91	83	77	73	81	76	72	79	75	71	77	73	70	69		
5	88	78	72	67	86	77	71	66	75	70	66	74	69	65	72	68	64	63		
6	83	73	66	61	81	72	65	61	70	65	60	69	64	60	67	63	59	58		
7	78	68	61	56	77	67	61	56	66	60	56	64	59	55	63	59	55	53		
8	74	63	57	52	73	63	56	52	61	56	52	60	55	51	59	55	51	50		
9	70	59	53	48	69	59	52	48	58	52	48	57	52	48	56	51	48	46		
10	66	56	49	45	65	55	49	45	54	49	45	54	48	45	53	48	45	43		

AVERAGE LUMINANCE (cd/sqm):

	0°
0°	251997
5°	248271
10°	237292
15°	219752
20°	197487
25°	173599
30°	147643
35°	119712
40°	89940
45°	57928
50°	27530
55°	21638
60°	20481
65°	19094
70°	17246
75°	15589
80°	14269
85°	14341

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 0°

Vertical Angle: 45°

Luminance: 57928 cd/sqm

TEST NUMBER: P1263525

CATALOG NUMBER: P3A20R509727D010 E3DLD1H

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	105.7	8.5
10°-20°	269.9	21.8
20°-30°	327.9	26.4
30°-40°	278.1	22.4
40°-50°	144.5	11.6
50°-60°	52.1	4.2
60°-70°	36.0	2.9
70°-80°	19.6	1.6
80°-90°	6.2	0.5
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	703.5	56.7
0°-40°	981.6	79.2
0°-60°	1178.2	95.0
0°-90°	1240.0	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	1240.0	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	1149	
5°	1128	106
15°	968	270
25°	718	328
35°	447	278
45°	187	144
55°	57	52
65°	37	36
75°	18	20
85°	6	6
90°	0	

TEST NUMBER: P1263525

CATALOG NUMBER: P3A20R509727D010 E3DLD1H

CANDELA DISTRIBUTION (FULL):

0°	
0°	1149.2
2.5°	1144.9
5°	1127.9
7.5°	1102.5
10°	1065.7
12.5°	1019.0
15°	968.0
17.5°	910.0
20°	846.3
22.5°	781.2
25°	717.5
27.5°	651.0
30°	583.1
32.5°	515.1
35°	447.2
37.5°	380.7
40°	314.2
42.5°	250.5
45°	186.8
47.5°	124.5
50°	80.7
52.5°	62.3
55°	56.6
57.5°	50.9
60°	46.7
62.5°	41.0
65°	36.8
67.5°	31.1
70°	26.9
72.5°	22.6
75°	18.4
77.5°	14.2
80°	11.3
82.5°	8.5
85°	5.7
87.5°	2.8
90°	0.0

(END OF REPORT)