

Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for
Cooper Lighting Solutions

Brand: IRiS

Report Number: P1264972

Luminaire Tested: P3A13R159730DE010 E3DL1LI

Issue Date: 1/30/2026

Test Information

Test Method: LM-79-2019
Report Number: P1264972
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2601-647-3)
Test Lab: INNOVATION CENTER
Issue Date: 1/30/2026
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: IRiS
Catalog Number: P3A13R159730DE010 E3DL1LI
Description: 3in Adjustable LED luminaire with, R15 optic, 3000K CCT AND, 97CRI , E3DL1LI TRIM
Light Source: -
Ballast/Driver: -


Summary

Lumens per Lamp: N/A
Luminaire Lumens: 904.0 lumens
Efficiency: N/A
Efficacy: 61.9 lumens/watt
Spacing Criteria (0/90/45): 0.4 / 0.4 / 0.43
Luminous Opening: Circular (Dia: 0.25' x H: 0')
CIE Type: Direct

Input Watts (W): 14.6
Input Voltage (V): NR
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT

TEST NUMBER: P1264972
CATALOG NUMBER: P3A13R159730DE010 E3DL1LI

Luminous Intensity Polar Plot

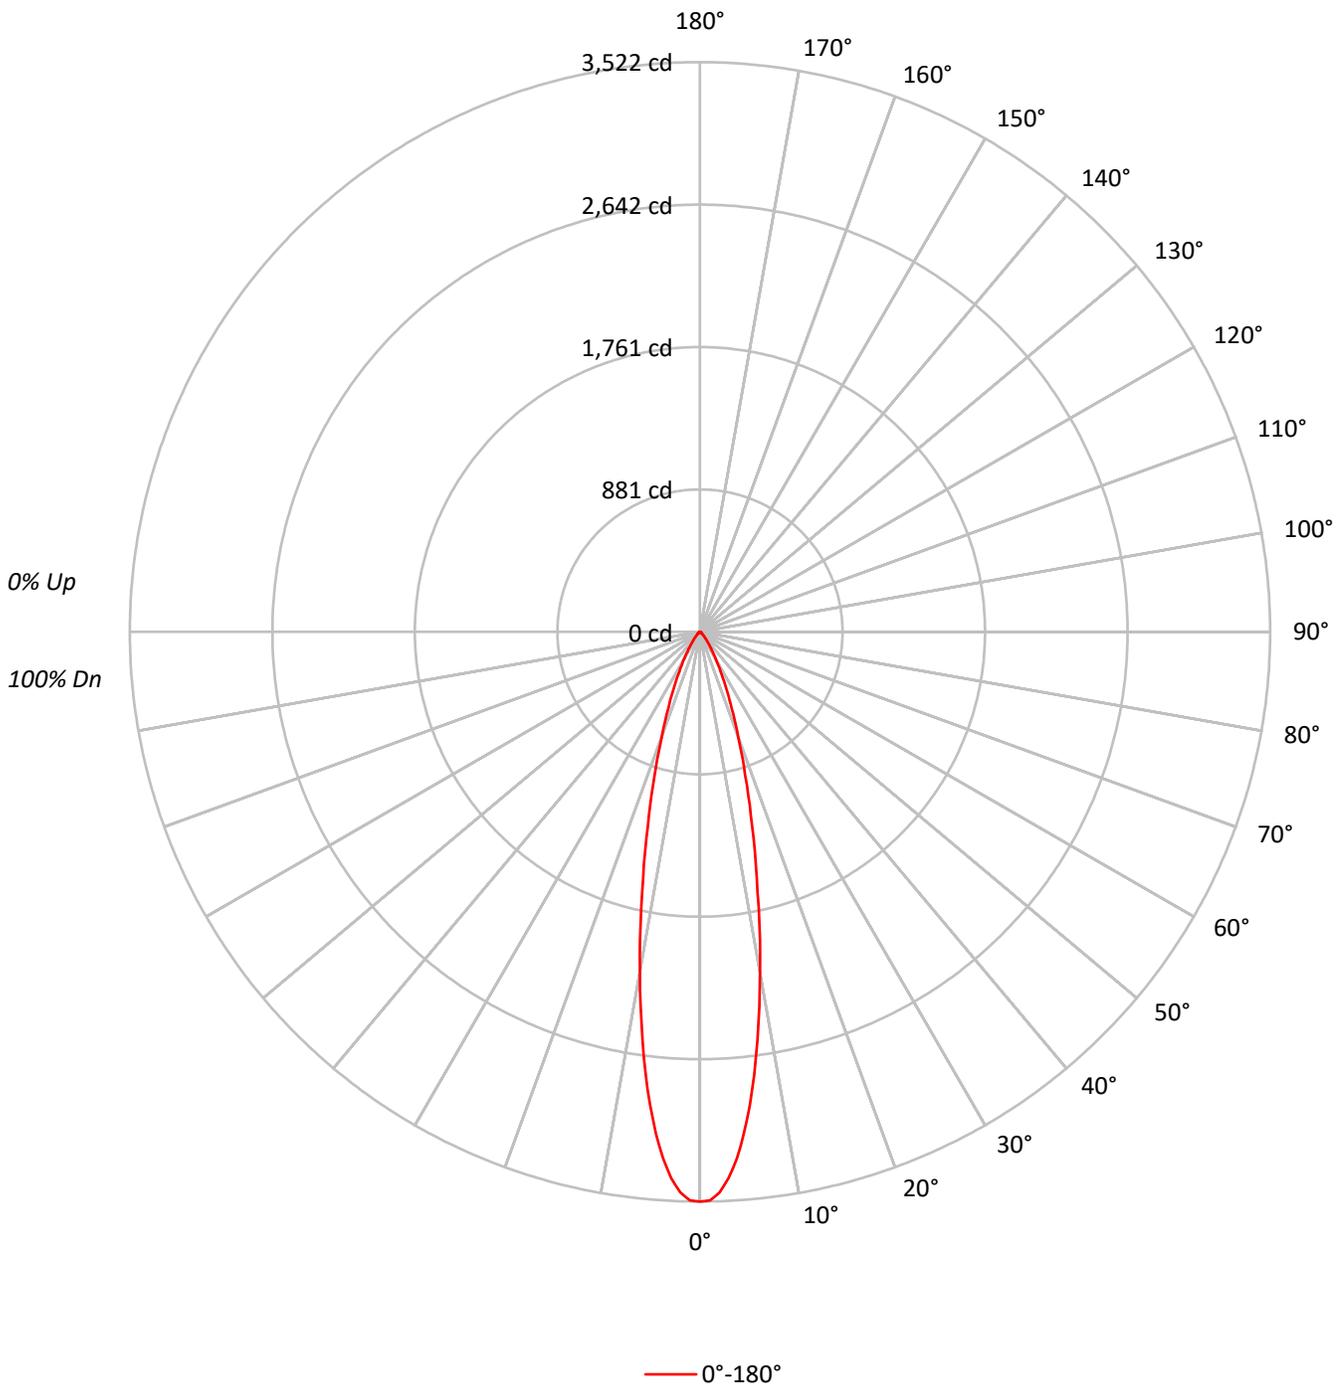



TEST NUMBER: P1264972

CATALOG NUMBER: P3A13R159730DE010 E3DL1LI

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20					
RC	80				70				50				30				10			0		
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0	
RCR																						
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100	99	98	97	100
1	114	112	110	108	112	110	108	106	106	104	103	102	101	100	99	98	97	95	95	94	93	95
2	110	106	103	100	108	104	101	99	101	99	97	98	96	95	96	94	93	91	91	90	88	91
3	106	101	97	93	104	99	96	93	97	94	91	94	92	90	92	90	88	87	87	86	85	87
4	102	96	92	88	100	95	91	88	93	89	87	91	88	86	89	87	85	83	83	82	81	83
5	98	92	87	84	97	91	87	83	89	85	83	88	84	82	86	83	81	80	80	79	78	80
6	95	88	83	80	94	87	83	80	86	82	79	85	81	79	83	80	78	77	77	76	75	77
7	92	85	80	77	91	84	80	76	83	79	76	82	78	76	81	78	75	74	74	73	72	74
8	89	81	77	74	88	81	77	73	80	76	73	79	75	73	78	75	73	72	72	71	70	72
9	86	79	74	71	85	78	74	71	77	73	71	77	73	70	76	73	70	69	69	68	67	69
10	84	76	71	68	83	76	71	68	75	71	68	74	71	68	74	70	68	67	67	66	65	67

AVERAGE LUMINANCE (cd/sqm):

	0°
0°	772263
5°	685492
10°	476054
15°	281523
20°	160337
25°	91650
30°	50717
35°	27037
40°	14971
45°	8094
50°	5049
55°	4014
60°	3421
65°	3165
70°	2821
75°	2965
80°	2147
85°	2264

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 0°
 Vertical Angle: 45°
 Luminance: 8094 cd/sqm



TEST NUMBER: P1264972
 CATALOG NUMBER: P3A13R159730DE010 E3DL1LI

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	264.8	29.3
10°-20°	349.5	38.7
20°-30°	179.9	19.9
30°-40°	67.6	7.5
40°-50°	22.1	2.4
50°-60°	9.5	1.1
60°-70°	6.0	0.7
70°-80°	3.6	0.4
80°-90°	0.9	0.1
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	794.3	87.9
0°-40°	861.8	95.3
0°-60°	893.5	98.8
0°-90°	904.0	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	904.0	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	3522	
5°	3114	265
15°	1240	350
25°	379	180
35°	101	68
45°	26	22
55°	10	10
65°	6	6
75°	4	4
85°	1	1
90°	0	

TEST NUMBER: P1264972

CATALOG NUMBER: P3A13R159730DE010 E3DL1LI

CANDELA DISTRIBUTION (FULL):

0°	
0°	3521.8
1°	3514.8
2°	3468.6
3°	3380.7
4°	3264.9
5°	3114.2
6°	2943.5
7°	2756.3
8°	2548.1
9°	2342.6
10°	2138.0
12.5°	1645.1
15°	1240.1
17.5°	928.3
20°	687.1
22.5°	512.9
25°	378.8
27.5°	276.1
30°	200.3
32.5°	142.0
35°	101.0
37.5°	72.3
40°	52.3
42.5°	37.4
45°	26.1
47.5°	19.2
50°	14.8
52.5°	12.2
55°	10.5
57.5°	8.7
60°	7.8
62.5°	7.0
65°	6.1
67.5°	5.2
70°	4.4
72.5°	4.4
75°	3.5
77.5°	2.6
80°	1.7
82.5°	1.7
85°	0.9
87.5°	0.0
90°	0.0

(END OF REPORT)