

Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for
Cooper Lighting Solutions

Brand: IRiS

Report Number: P1265023

Luminaire Tested: P3A13R259730DE010 E3D1H

Issue Date: 1/29/2026

Test Information

Test Method: LM-79-2019
Report Number: P1265023
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2501-338-9)
Test Lab: INNOVATION CENTER
Issue Date: 1/29/2026
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: IRiS
Catalog Number: P3A13R259730DE010 E3D1H
Description: 3in Adjustable LED luminaire with, R25 optic, 3000K CCT AND, 97CRI , E3D1H TRIM
Light Source: -
Ballast/Driver: -

Summary


Lumens per Lamp: N/A
Luminaire Lumens: 1178.0 lumens
Efficiency: N/A
Efficacy: 80.7 lumens/watt
Spacing Criteria (0/90/45): 0.44 / 0.44 / 0.4
Luminous Opening: Circular (Dia: 0.25' x H: 0')
CIE Type: Direct

Input Watts (W): 14.6
Input Voltage (V): NR
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT

TEST NUMBER: P1265023

CATALOG NUMBER: P3A13R259730DE010 E3D1H

Luminous Intensity Polar Plot

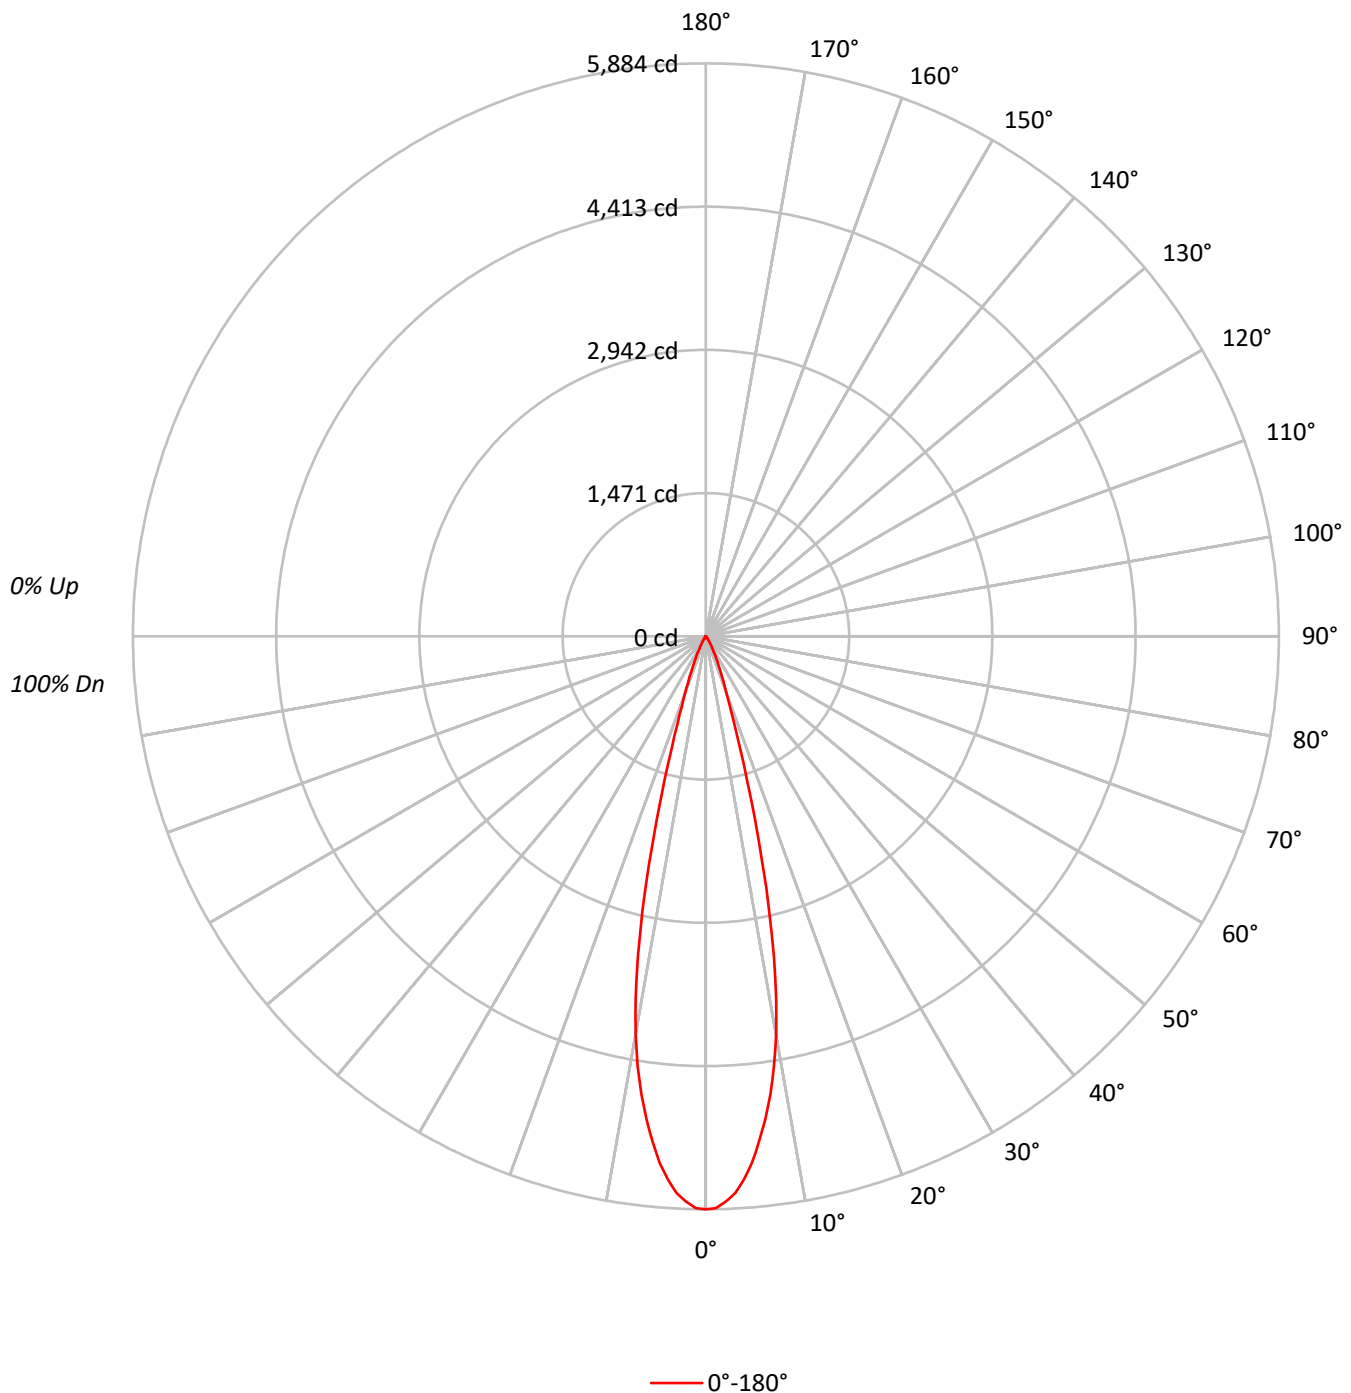

TEST NUMBER: P1265023

CATALOG NUMBER: P3A13R259730DE010 E3D1H

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20					20					20					20
RC	80				70					50					30					10
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10
RCR																				
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100	99	99
1	115	113	111	110	113	111	110	108	107	106	105	104	103	102	100	99	99	97	97	97
2	112	108	106	103	110	107	104	102	104	102	100	101	99	98	98	97	96	94	94	94
3	109	104	101	98	107	103	100	97	100	98	96	98	96	94	96	94	93	92	92	92
4	106	101	97	94	104	100	96	94	98	95	92	96	93	91	94	92	90	89	89	89
5	103	97	93	91	101	96	93	90	95	92	90	93	91	89	92	90	88	87	87	87
6	100	94	90	88	99	94	90	87	92	89	87	91	88	86	90	88	86	85	85	85
7	98	92	88	85	97	91	87	85	90	87	84	89	86	84	88	86	84	83	83	83
8	95	89	85	83	94	89	85	83	88	85	82	87	84	82	86	84	82	81	81	81
9	93	87	83	81	92	86	83	80	86	83	80	85	82	80	84	82	80	79	79	79
10	91	85	81	79	90	84	81	79	84	81	78	83	80	78	83	80	78	77	77	77

AVERAGE LUMINANCE (cd/sqm):

	0°
0°	1290138
5°	1195110
10°	924677
15°	441660
20°	145613
25°	61383
30°	23801
35°	10279
40°	3435
45°	1582
50°	580
55°	344
60°	175
65°	208
70°	0
75°	0
80°	0
85°	0

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 0°

Vertical Angle: 45°

Luminance: 1582 cd/sqm

TEST NUMBER: P1265023

CATALOG NUMBER: P3A13R259730DE010 E3D1H

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	477.2	40.5
10°-20°	542.8	46.1
20°-30°	126.1	10.7
30°-40°	26.5	2.2
40°-50°	4.3	0.4
50°-60°	0.7	0.1
60°-70°	0.3	0.0
70°-80°	0.0	0.0
80°-90°	0.0	0.0
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	1146.2	97.3
0°-40°	1172.6	99.5
0°-60°	1177.6	100.0
0°-90°	1178.0	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	1178.0	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	5884	
5°	5429	477
15°	1946	543
25°	254	126
35°	38	26
45°	5	4
55°	1	1
65°	0	0
75°	0	0
85°	0	0
90°	0	

TEST NUMBER: P1265023

CATALOG NUMBER: P3A13R259730DE010 E3D1H

CANDELA DISTRIBUTION (FULL):

0°	
0°	5883.5
1°	5871.5
2°	5810.4
3°	5724.6
4°	5593.5
5°	5429.4
6°	5218.9
7°	4998.5
8°	4751.2
9°	4472.3
10°	4152.8
11°	3782.5
12°	3357.5
13°	2892.0
14°	2405.1
15°	1945.5
16°	1538.9
17°	1198.9
18°	943.1
19°	754.3
20°	624.0
21°	521.5
22°	437.8
23°	365.6
24°	305.8
25°	253.7
27.5°	150.3
30°	94.0
32.5°	60.2
35°	38.4
37.5°	23.1
40°	12.0
42.5°	7.7
45°	5.1
47.5°	3.0
50°	1.7
52.5°	0.9
55°	0.9
57.5°	0.4
60°	0.4
62.5°	0.4
65°	0.4
67.5°	0.4
70°	0.0
72.5°	0.0

TEST NUMBER: P1265023

CATALOG NUMBER: P3A13R259730DE010 E3D1H

CANDELA DISTRIBUTION (continued):

	0°
75°	0.0
77.5°	0.0
80°	0.0
82.5°	0.0
85°	0.0
87.5°	0.0
90°	0.0

(END OF REPORT)