

Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for
Cooper Lighting Solutions

Brand: IRiS

Report Number: P1263817

Luminaire Tested: P3A02R259730DE010 E3CB1MB

Issue Date: 1/30/2026

Test Information

Test Method: LM-79-2019
Report Number: P1263817
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2601-647-12)
Test Lab: INNOVATION CENTER
Issue Date: 1/30/2026
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: IRiS
Catalog Number: P3A02R259730DE010 E3CB1MB
Description: 3in Adjustable LED luminaire with, R25 optic, 3000K CCT AND, 97CRI , E3CB1MB TRIM
Light Source: -
Ballast/Driver: -

Summary


Lumens per Lamp: N/A
Luminaire Lumens: 277.9 lumens
Efficiency: N/A
Efficacy: 77.2 lumens/watt
Spacing Criteria (0/90/45): 0.45 / 0.45 / 0.41
Luminous Opening: Circular (Dia: 0.25' x H: 0')
CIE Type: Direct

Input Watts (W): 3.6
Input Voltage (V): NR
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT

TEST NUMBER: P1263817

CATALOG NUMBER: P3A02R259730DE010 E3CB1MB

Luminous Intensity Polar Plot

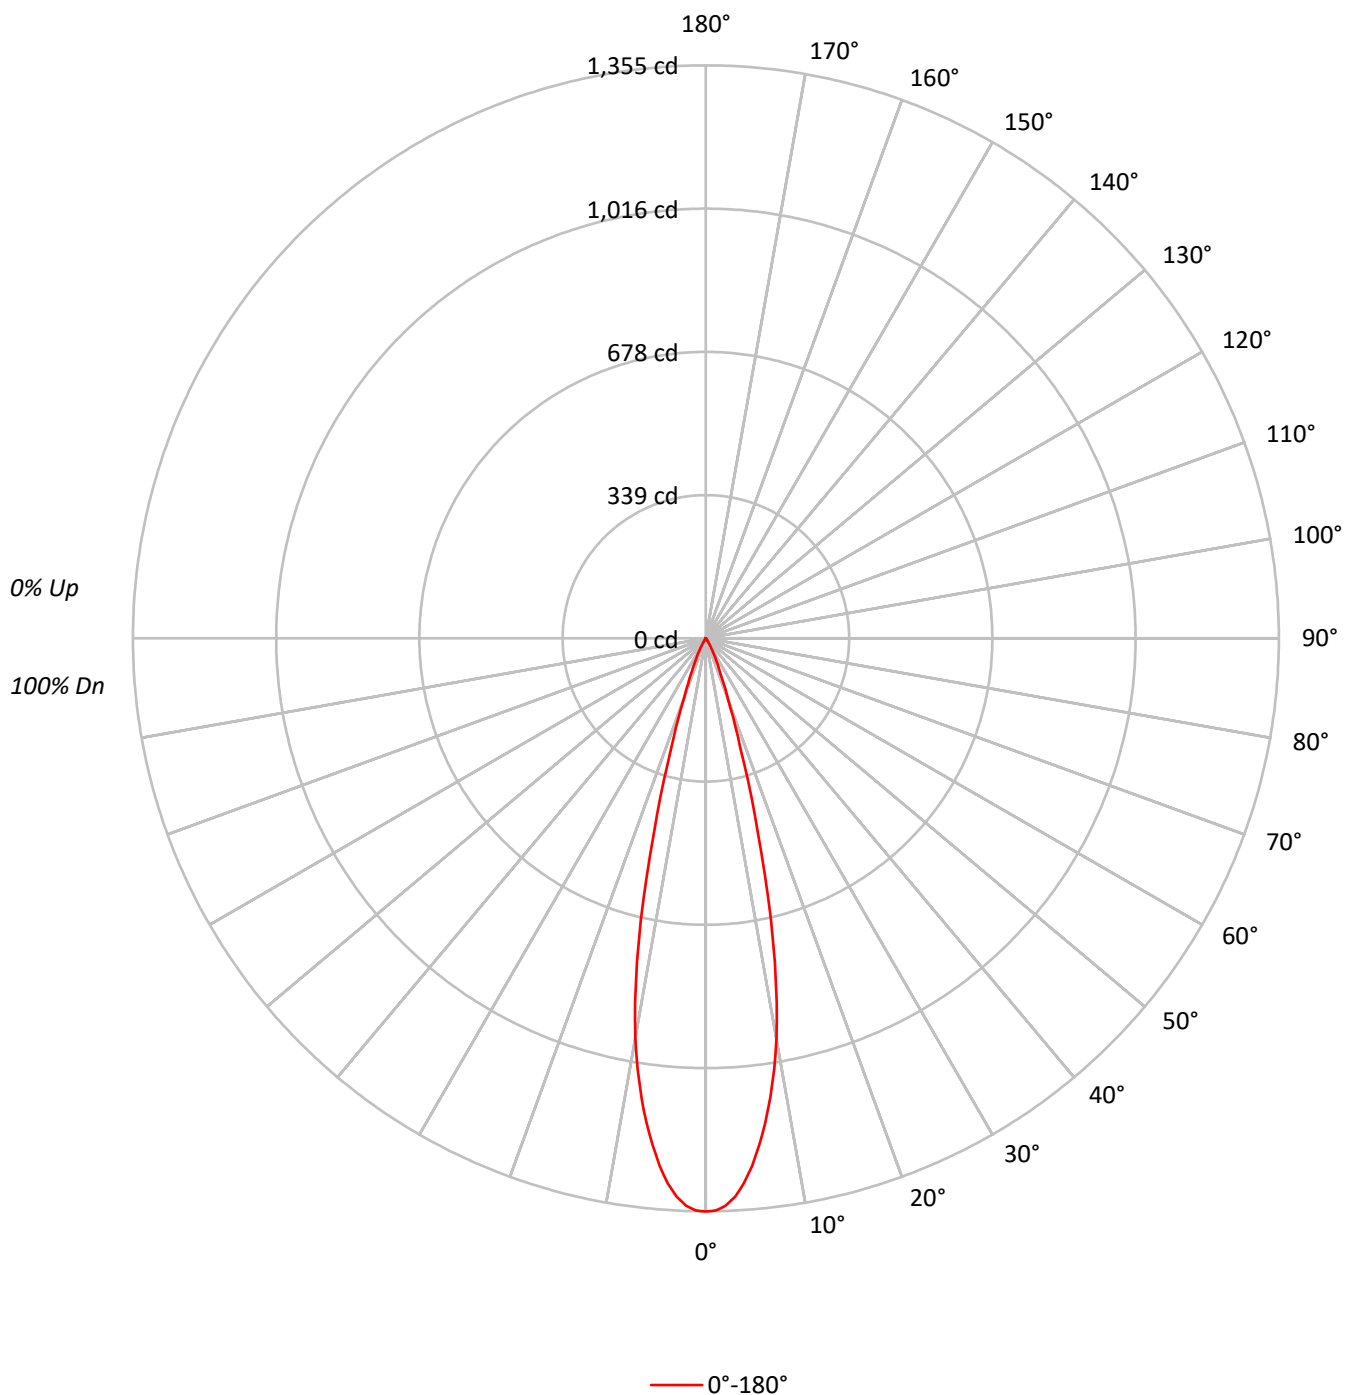

TEST NUMBER: P1263817

CATALOG NUMBER: P3A02R259730DE010 E3CB1MB

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20					20					20					20					20
RC	80					70					50					30					10
RW	70	50	30	10		70	50	30	10		50	30	10		50	30	10		50	30	10
RCR																					
0	119	119	119	119		116	116	116	116		111	111	111		106	106	106		102	102	102
1	115	113	111	110		113	111	109	108		107	106	105		103	103	102		100	99	99
2	112	108	105	103		110	107	104	102		104	102	100		101	99	98		98	97	96
3	108	104	101	98		107	103	100	97		100	98	96		98	96	94		96	94	93
4	105	100	97	94		104	99	96	93		97	95	92		96	93	91		94	92	90
5	103	97	93	90		101	96	93	90		95	92	89		93	91	89		92	90	88
6	100	94	90	87		99	93	90	87		92	89	87		91	88	86		90	87	86
7	97	91	88	85		96	91	87	85		90	87	84		89	86	84		88	85	83
8	95	89	85	83		94	89	85	82		88	84	82		87	84	82		86	83	81
9	93	87	83	80		92	86	83	80		86	82	80		85	82	80		84	82	80
10	91	85	81	78		90	84	81	78		84	80	78		83	80	78		82	80	78

AVERAGE LUMINANCE (cd/sqm):

	0°
0°	297213
5°	275676
10°	213779
15°	107197
20°	35213
25°	14009
30°	5241
35°	1526
40°	687
45°	279
50°	239
55°	153
60°	175
65°	208
70°	128
75°	169
80°	253
85°	0

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 0°

Vertical Angle: 45°

Luminance: 279 cd/sqm

TEST NUMBER: P1263817

CATALOG NUMBER: P3A02R259730DE010 E3CB1MB

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	110.2	39.6
10°-20°	131.4	47.3
20°-30°	29.6	10.7
30°-40°	4.8	1.7
40°-50°	0.9	0.3
50°-60°	0.5	0.2
60°-70°	0.4	0.1
70°-80°	0.2	0.1
80°-90°	0.0	0.0
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	271.2	97.6
0°-40°	276.0	99.3
0°-60°	277.3	99.8
0°-90°	277.9	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	277.9	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	1355	
5°	1252	110
15°	472	131
25°	58	30
35°	6	5
45°	1	1
55°	0	0
65°	0	0
75°	0	0
85°	0	0
90°	0	

TEST NUMBER: P1263817

CATALOG NUMBER: P3A02R259730DE010 E3CB1MB

CANDELA DISTRIBUTION (FULL):

0°	
0°	1355.4
1°	1353.3
2°	1342.3
3°	1322.2
4°	1291.9
5°	1252.4
6°	1205.2
7°	1154.1
8°	1095.5
9°	1031.5
10°	960.1
11°	877.8
12°	783.0
13°	683.8
14°	577.5
15°	472.2
17.5°	269.1
20°	150.9
22.5°	91.1
25°	57.9
27.5°	35.6
30°	20.7
32.5°	10.9
35°	5.7
37.5°	3.7
40°	2.4
42.5°	1.5
45°	0.9
47.5°	0.7
50°	0.7
52.5°	0.7
55°	0.4
57.5°	0.4
60°	0.4
62.5°	0.4
65°	0.4
67.5°	0.4
70°	0.2
72.5°	0.2
75°	0.2
77.5°	0.2
80°	0.2
82.5°	0.0
85°	0.0
87.5°	0.0



TEST NUMBER: P1263817
CATALOG NUMBER: P3A02R259730DE010 E3CB1MB

CANDELA DISTRIBUTION (continued):

0°
90° | 0.0

(END OF REPORT)