

Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for
Cooper Lighting Solutions

Brand: IRiS

Report Number: P1264004

Luminaire Tested: P3A02R559730DE010 E3DL1H

Issue Date: 1/30/2026

Test Information

Test Method: LM-79-2019
Report Number: P1264004
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2601-647-35)
Test Lab: INNOVATION CENTER
Issue Date: 1/30/2026
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: IRiS
Catalog Number: P3A02R559730DE010 E3DL1H
Description: 3in Adjustable LED luminaire with, R55 optic, 3000K CCT AND, 97CRI , E3DL1H TRIM
Light Source: -
Ballast/Driver: -

Summary


Lumens per Lamp: N/A
Luminaire Lumens: 238.0 lumens
Efficiency: N/A
Efficacy: 66.1 lumens/watt
Spacing Criteria (0/90/45): 0.83 / 0.83 / 0.81
Luminous Opening: Circular (Dia: 0.25' x H: 0')
CIE Type: Direct

Input Watts (W): 3.6
Input Voltage (V): NR
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT

TEST NUMBER: P1264004

CATALOG NUMBER: P3A02R559730DE010 E3DL1H

Luminous Intensity Polar Plot

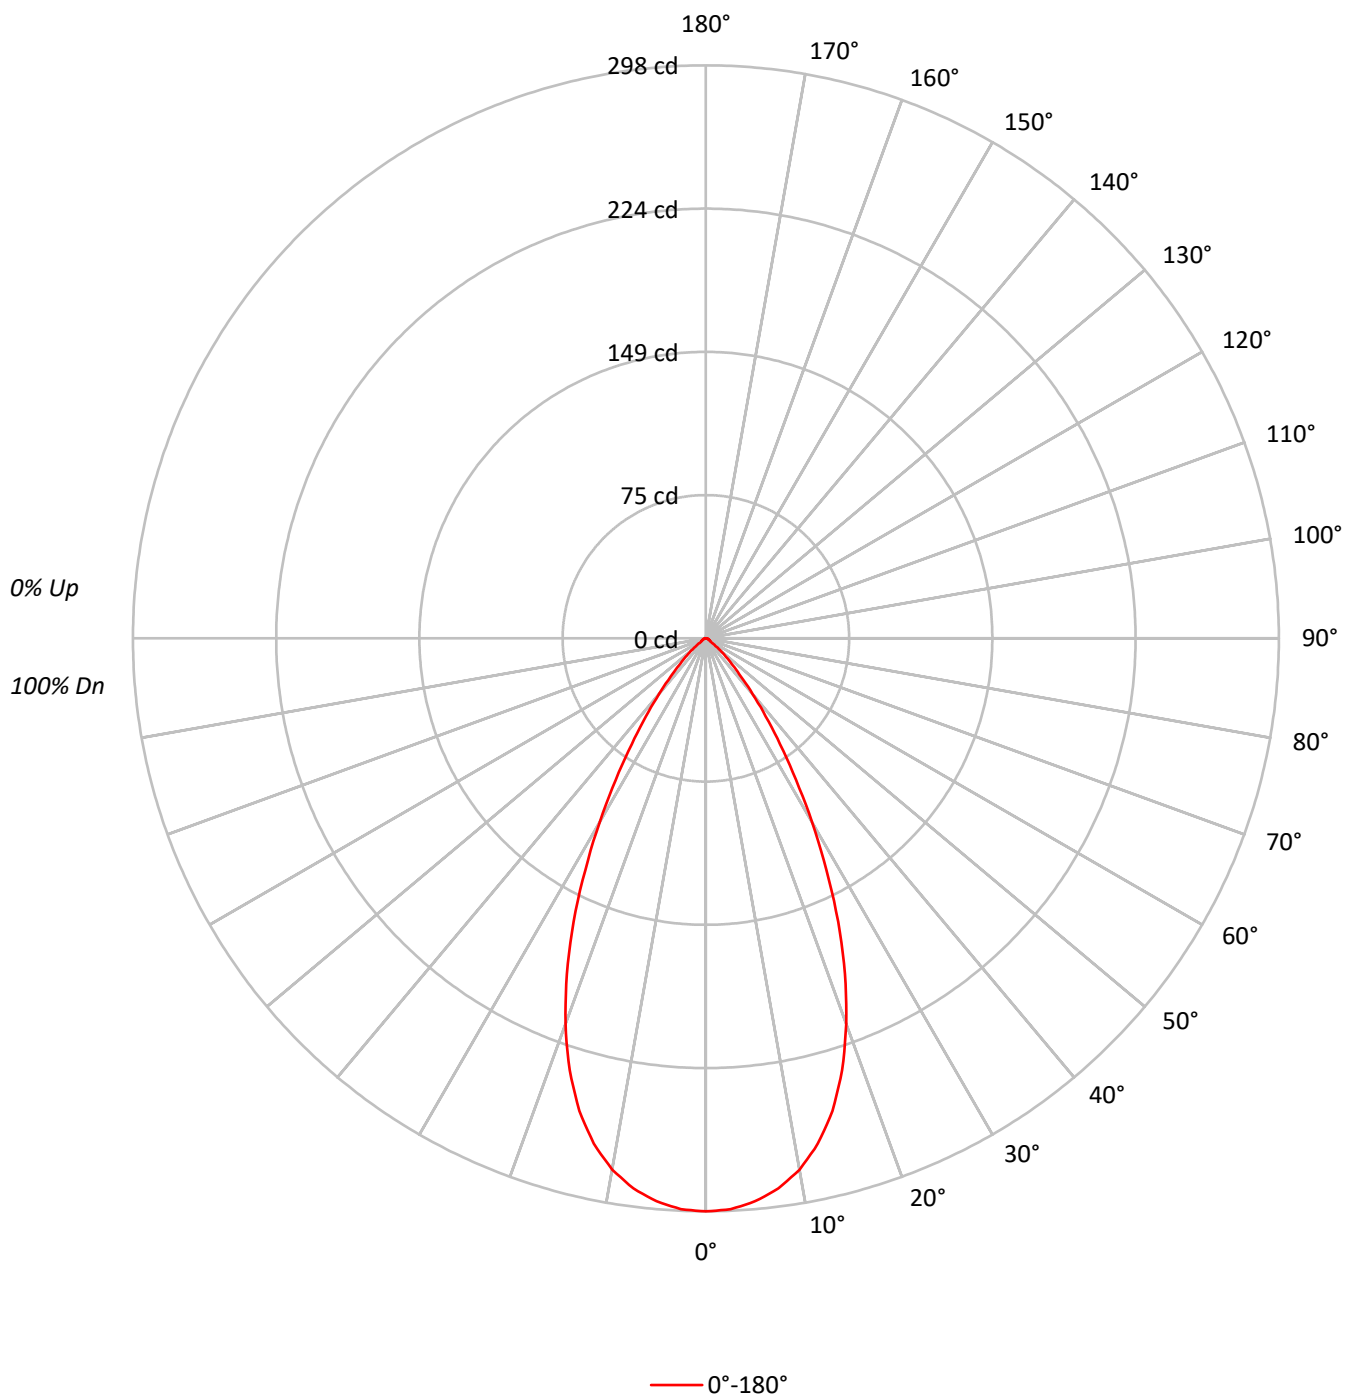

TEST NUMBER: P1264004

CATALOG NUMBER: P3A02R559730DE010 E3DL1H

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20					20					20					20					20
RC	80					70					30					10					0
RW	70	50	30	10		70	50	30	10		50	30	10		50	30	10		50	30	10
RCR																					
0	119	119	119	119		116	116	116	116		111	111	111		106	106	106		102	102	102
1	113	111	108	106		111	108	106	104		104	103	101		101	99	98		97	96	95
2	108	103	99	95		106	101	97	94		98	95	92		95	92	90		92	90	88
3	102	96	91	87		100	94	90	86		92	88	85		89	86	83		87	85	82
4	97	90	84	80		95	89	83	79		86	82	78		84	81	78		82	79	77
5	92	84	78	74		91	83	78	74		81	77	73		80	76	72		78	75	72
6	88	79	73	69		86	78	73	68		77	72	68		75	71	68		74	70	67
7	84	74	68	64		82	74	68	64		72	67	64		71	67	63		70	66	63
8	80	70	64	60		78	70	64	60		69	63	60		67	63	60		67	62	59
9	76	66	61	57		75	66	60	56		65	60	56		64	59	56		63	59	56
10	73	63	57	53		72	62	57	53		62	57	53		61	56	53		60	56	53

AVERAGE LUMINANCE (cd/sqm):

	0°
0°	65346
5°	64693
10°	62479
15°	57753
20°	49821
25°	39365
30°	27928
35°	17989
40°	10820
45°	6109
50°	3275
55°	1185
60°	1053
65°	1038
70°	962
75°	932
80°	884
85°	503

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 0°
Vertical Angle: 45°
Luminance: 6109 cd/sqm

TEST NUMBER: P1264004

CATALOG NUMBER: P3A02R559730DE010 E3DL1H

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	27.6	11.6
10°-20°	70.3	29.6
20°-30°	73.7	31.0
30°-40°	43.0	18.1
40°-50°	16.1	6.8
50°-60°	3.8	1.6
60°-70°	1.9	0.8
70°-80°	1.2	0.5
80°-90°	0.3	0.1
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	171.7	72.1
0°-40°	214.7	90.2
0°-60°	234.6	98.6
0°-90°	238.0	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	238.0	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	298	
5°	294	28
15°	254	70
25°	163	74
35°	67	43
45°	20	16
55°	3	4
65°	2	2
75°	1	1
85°	0	0
90°	0	

TEST NUMBER: P1264004

CATALOG NUMBER: P3A02R559730DE010 E3DL1H

CANDELA DISTRIBUTION (FULL):

0°	
0°	298.0
2.5°	297.2
5°	293.9
7.5°	288.6
10°	280.6
12.5°	269.2
15°	254.4
17.5°	235.6
20°	213.5
22.5°	188.9
25°	162.7
27.5°	135.8
30°	110.3
32.5°	87.1
35°	67.2
37.5°	51.1
40°	37.8
42.5°	27.1
45°	19.7
47.5°	14.2
50°	9.6
52.5°	5.5
55°	3.1
57.5°	2.6
60°	2.4
62.5°	2.2
65°	2.0
67.5°	1.7
70°	1.5
72.5°	1.3
75°	1.1
77.5°	0.9
80°	0.7
82.5°	0.4
85°	0.2
87.5°	0.2
90°	0.0

(END OF REPORT)