

Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for
Cooper Lighting Solutions

Brand: IRiS

Report Number: P1264307

Luminaire Tested: P3A05R359730DE010 E3DLD1LI

Issue Date: 1/30/2026

Test Information

Test Method: LM-79-2019
Report Number: P1264307
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2601-647-18)
Test Lab: INNOVATION CENTER
Issue Date: 1/30/2026
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: IRiS
Catalog Number: P3A05R359730DE010 E3DLD1LI
Description: 3in Adjustable LED luminaire with, R35 optic, 3000K CCT AND, 97CRI , E3DLD1LI TRIM
Light Source: -
Ballast/Driver: -

Summary


Lumens per Lamp: N/A
Luminaire Lumens: 363.0 lumens
Efficiency: N/A
Efficacy: 50.4 lumens/watt
Spacing Criteria (0/90/45): 0.8 / 0.8 / 0.87
Luminous Opening: Circular (Dia: 0.25' x H: 0')
CIE Type: Direct

Input Watts (W): 7.2
Input Voltage (V): NR
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT

TEST NUMBER: P1264307

CATALOG NUMBER: P3A05R359730DE010 E3DLD1LI

Luminous Intensity Polar Plot

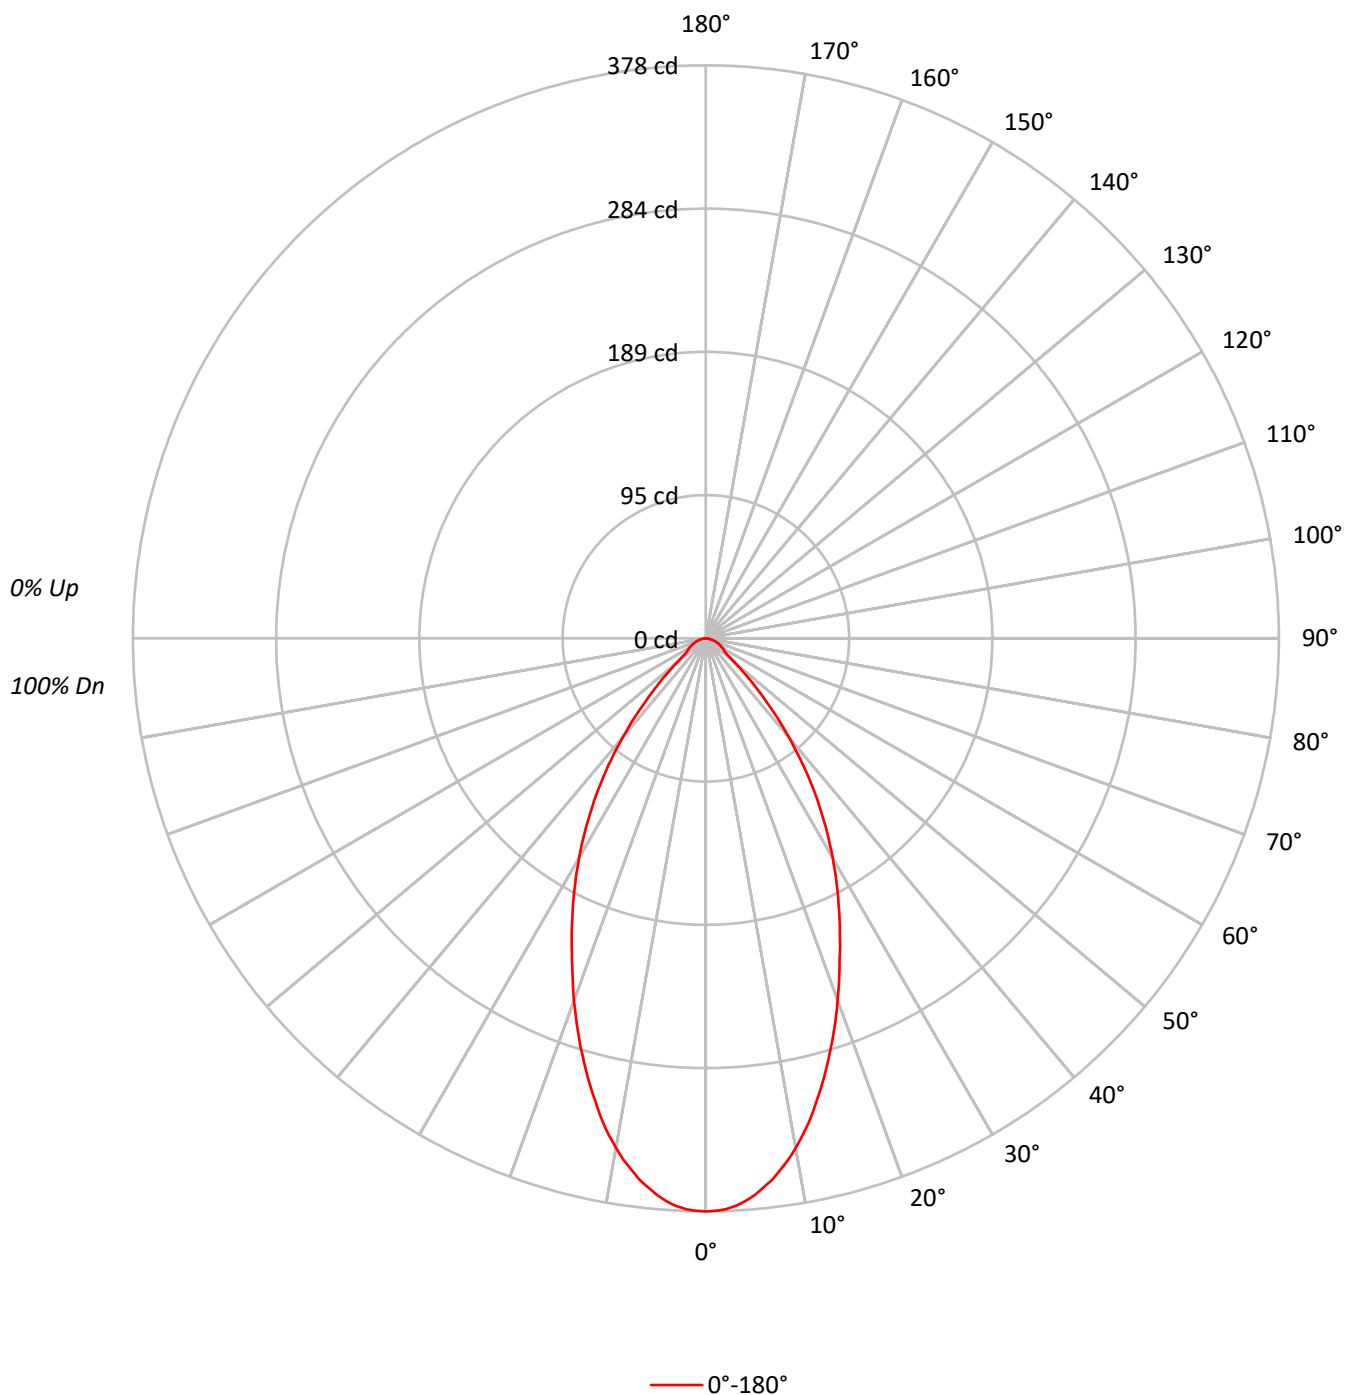

TEST NUMBER: P1264307

CATALOG NUMBER: P3A05R359730DE010 E3DLD1LI

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20
RC	80				70				50				30				10
RW	70	50	30	10	70	50	30	10	50	30	10		50	30	10		50
RCR																	
0	119	119	119	119	116	116	116	116	111	111	111		106	106	106		102
1	112	109	106	104	110	107	104	102	103	101	99		99	98	96		96
2	106	100	96	92	104	98	94	91	95	92	89		92	89	87		89
3	100	92	87	82	98	91	86	81	88	84	80		86	82	79		83
4	94	85	79	74	92	84	78	74	82	77	73		80	75	72		78
5	89	79	73	68	87	78	72	67	76	71	67		75	70	66		73
6	84	74	67	62	82	73	67	62	71	66	61		70	65	61		68
7	79	69	62	57	78	68	62	57	67	61	57		65	60	57		64
8	75	64	58	53	74	64	57	53	63	57	53		62	56	53		61
9	71	60	54	50	70	60	54	50	59	53	49		58	53	49		57
10	67	57	51	46	66	56	50	46	56	50	46		55	50	46		54

AVERAGE LUMINANCE (cd/sqm):

	0°
0°	82910
5°	81158
10°	76017
15°	68218
20°	59342
25°	50567
30°	42361
35°	33729
40°	24389
45°	15443
50°	8426
55°	5849
60°	5526
65°	5137
70°	4873
75°	4151
80°	3915
85°	3271

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 0°

Vertical Angle: 45°

Luminance: 15443 cd/sqm

TEST NUMBER: P1264307

CATALOG NUMBER: P3A05R359730DE010 E3DLD1LI

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	34.3	9.5
10°-20°	83.6	23.0
20°-30°	95.8	26.4
30°-40°	78.2	21.5
40°-50°	39.4	10.9
50°-60°	14.7	4.0
60°-70°	9.8	2.7
70°-80°	5.4	1.5
80°-90°	1.6	0.4
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	213.8	58.9
0°-40°	292.0	80.5
0°-60°	346.1	95.4
0°-90°	363.0	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	363.0	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	378	
5°	369	34
15°	300	84
25°	209	96
35°	126	78
45°	50	39
55°	15	15
65°	10	10
75°	5	5
85°	1	2
90°	0	

TEST NUMBER: P1264307

CATALOG NUMBER: P3A05R359730DE010 E3DLD1LI


CANDELA DISTRIBUTION (FULL):

0°	
0°	378.1
1°	377.7
2°	376.8
3°	375.0
4°	372.3
5°	368.7
6°	364.2
7°	359.8
8°	353.9
9°	348.1
10°	341.4
11°	334.2
12°	326.6
13°	318.0
14°	309.1
15°	300.5
17.5°	277.7
20°	254.3
22.5°	230.6
25°	209.0
27.5°	188.0
30°	167.3
32.5°	146.7
35°	126.0
37.5°	105.4
40°	85.2
42.5°	66.4
45°	49.8
47.5°	35.9
50°	24.7
52.5°	17.9
55°	15.3
57.5°	13.9
60°	12.6
62.5°	11.2
65°	9.9
67.5°	8.5
70°	7.6
72.5°	6.3
75°	4.9
77.5°	4.0
80°	3.1
82.5°	2.2
85°	1.3
87.5°	0.9



TEST NUMBER: P1264307
CATALOG NUMBER: P3A05R359730DE010 E3DLD1LI

CANDELA DISTRIBUTION (continued):



(END OF REPORT)