

Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for
Cooper Lighting Solutions

Brand: IRiS

Report Number: P1264337

Luminaire Tested: P3A05R409730DE010 E3DLD1GPH

Issue Date: 1/30/2026

Test Information

Test Method: LM-79-2019
Report Number: P1264337
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2601-647-22)
Test Lab: INNOVATION CENTER
Issue Date: 1/30/2026
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: IRiS
Catalog Number: P3A05R409730DE010 E3DLD1GPH
Description: 3in Adjustable LED luminaire with, R40 optic, 3000K CCT AND, 97CRI , E3DLD1GPH TRIM
Light Source: -
Ballast/Driver: -

Summary


Lumens per Lamp: N/A
Luminaire Lumens: 197.0 lumens
Efficiency: N/A
Efficacy: 27.4 lumens/watt
Spacing Criteria (0/90/45): 0.83 / 0.83 / 0.88
Luminous Opening: Circular (Dia: 0.25' x H: 0')
CIE Type: Direct

Input Watts (W): 7.2
Input Voltage (V): NR
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT

TEST NUMBER: P1264337

CATALOG NUMBER: P3A05R409730DE010 E3DLD1GPH

Luminous Intensity Polar Plot

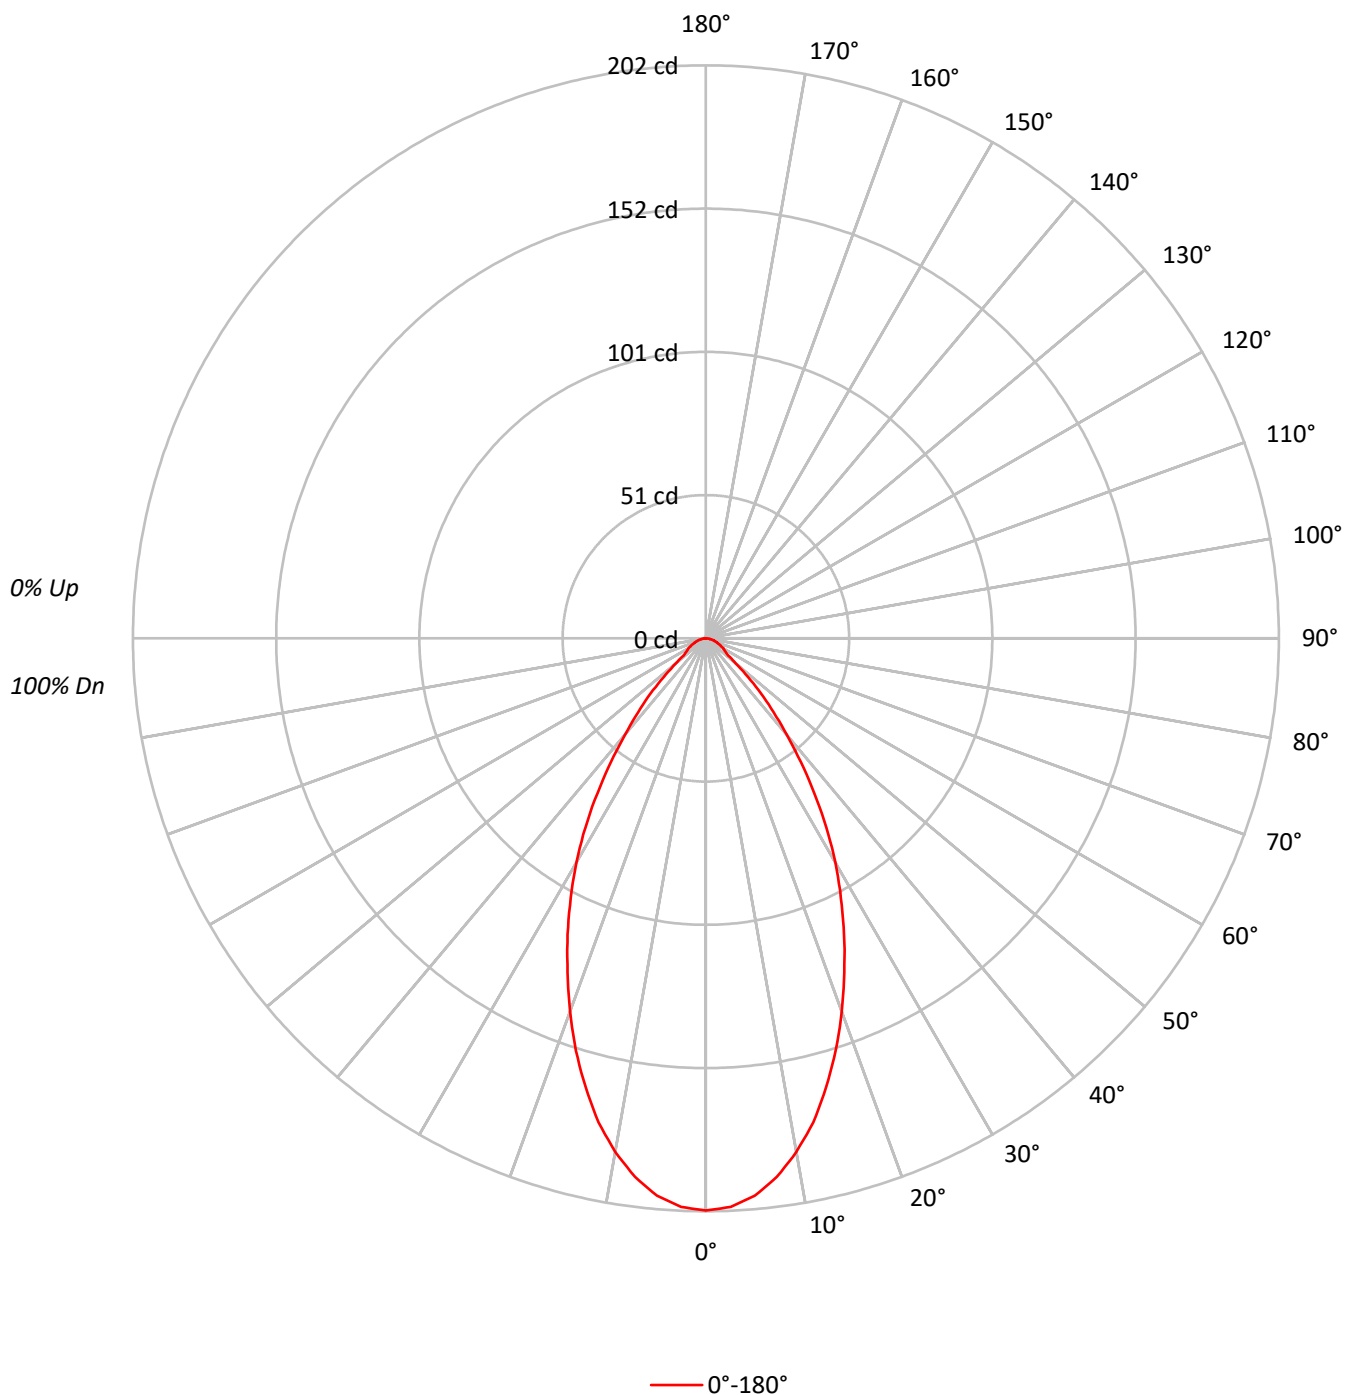

TEST NUMBER: P1264337

CATALOG NUMBER: P3A05R409730DE010 E3DLD1GPH

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20
RC	80				70				50				30				10
RW	70	50	30	10	70	50	30	10	50	30	10		50	30	10		50
RCR																	
0	119	119	119	119	116	116	116	116	111	111	111		106	106	106		102
1	112	109	106	104	110	107	104	102	103	101	99		99	98	96		96
2	106	100	96	92	104	98	94	91	95	92	89		92	89	87		89
3	100	92	87	82	98	91	86	81	88	84	80		86	82	79		83
4	94	85	79	74	92	84	78	74	82	77	73		80	75	72		78
5	89	79	73	68	87	78	72	67	76	71	67		75	70	66		73
6	84	74	67	62	82	73	67	62	71	66	61		70	65	61		68
7	79	69	62	57	78	68	62	57	67	61	57		65	60	57		64
8	75	64	58	53	74	64	57	53	63	57	53		62	56	53		61
9	71	60	54	50	70	60	54	50	59	53	49		58	53	49		57
10	67	57	51	46	66	56	50	46	56	50	46		55	50	46		54

AVERAGE LUMINANCE (cd/sqm):

	0°
0°	44229
5°	43429
10°	40926
15°	37185
20°	32670
25°	27897
30°	23092
35°	17828
40°	12681
45°	8559
50°	4674
55°	3288
60°	3114
65°	2854
70°	2565
75°	2457
80°	1894
85°	1761

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 0°

Vertical Angle: 45°

Luminance: 8559 cd/sqm

TEST NUMBER: P1264337

CATALOG NUMBER: P3A05R409730DE010 E3DLD1GPH

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	18.4	9.3
10°-20°	45.6	23.2
20°-30°	52.7	26.8
30°-40°	41.6	21.1
40°-50°	21.4	10.8
50°-60°	8.2	4.1
60°-70°	5.4	2.7
70°-80°	2.9	1.5
80°-90°	0.9	0.4
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	116.8	59.3
0°-40°	158.3	80.3
0°-60°	187.8	95.3
0°-90°	197.0	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	197.0	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	202	
5°	197	18
15°	164	46
25°	115	53
35°	67	42
45°	28	21
55°	9	8
65°	6	5
75°	3	3
85°	1	1
90°	0	

TEST NUMBER: P1264337

CATALOG NUMBER: P3A05R409730DE010 E3DLD1GPH

CANDELA DISTRIBUTION (FULL):

0°	
0°	201.7
2.5°	200.6
5°	197.3
7.5°	191.5
10°	183.8
12.5°	174.8
15°	163.8
17.5°	152.3
20°	140.0
22.5°	127.4
25°	115.3
27.5°	103.1
30°	91.2
32.5°	79.1
35°	66.6
37.5°	54.9
40°	44.3
42.5°	35.3
45°	27.6
47.5°	20.1
50°	13.7
52.5°	9.9
55°	8.6
57.5°	7.7
60°	7.1
62.5°	6.2
65°	5.5
67.5°	4.6
70°	4.0
72.5°	3.3
75°	2.9
77.5°	2.2
80°	1.5
82.5°	1.3
85°	0.7
87.5°	0.4
90°	0.0

(END OF REPORT)