

Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for
Cooper Lighting Solutions

Brand: IRiS

Report Number: P1264442

Luminaire Tested: P3A05R609730DE010 E3D1WMH

Issue Date: 1/29/2026

Test Information

Test Method: LM-79-2019
Report Number: P1264442
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2501-338-15)
Test Lab: INNOVATION CENTER
Issue Date: 1/29/2026
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: IRiS
Catalog Number: P3A05R609730DE010 E3D1WMH
Description: 3in Adjustable LED luminaire with, R60 optic, 3000K CCT AND, 97CRI , E3D1WMH TRIM
Light Source: -
Ballast/Driver: -

Summary


Lumens per Lamp: N/A
Luminaire Lumens: 537.9 lumens
Efficiency: N/A
Efficacy: 74.7 lumens/watt
Spacing Criteria (0/90/45): 0.94 / 0.94 / 0.88
Luminous Opening: Circular (Dia: 0.25' x H: 0')
CIE Type: Direct

Input Watts (W): 7.2
Input Voltage (V): NR
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT

TEST NUMBER: P1264442

CATALOG NUMBER: P3A05R609730DE010 E3D1WMH

Luminous Intensity Polar Plot

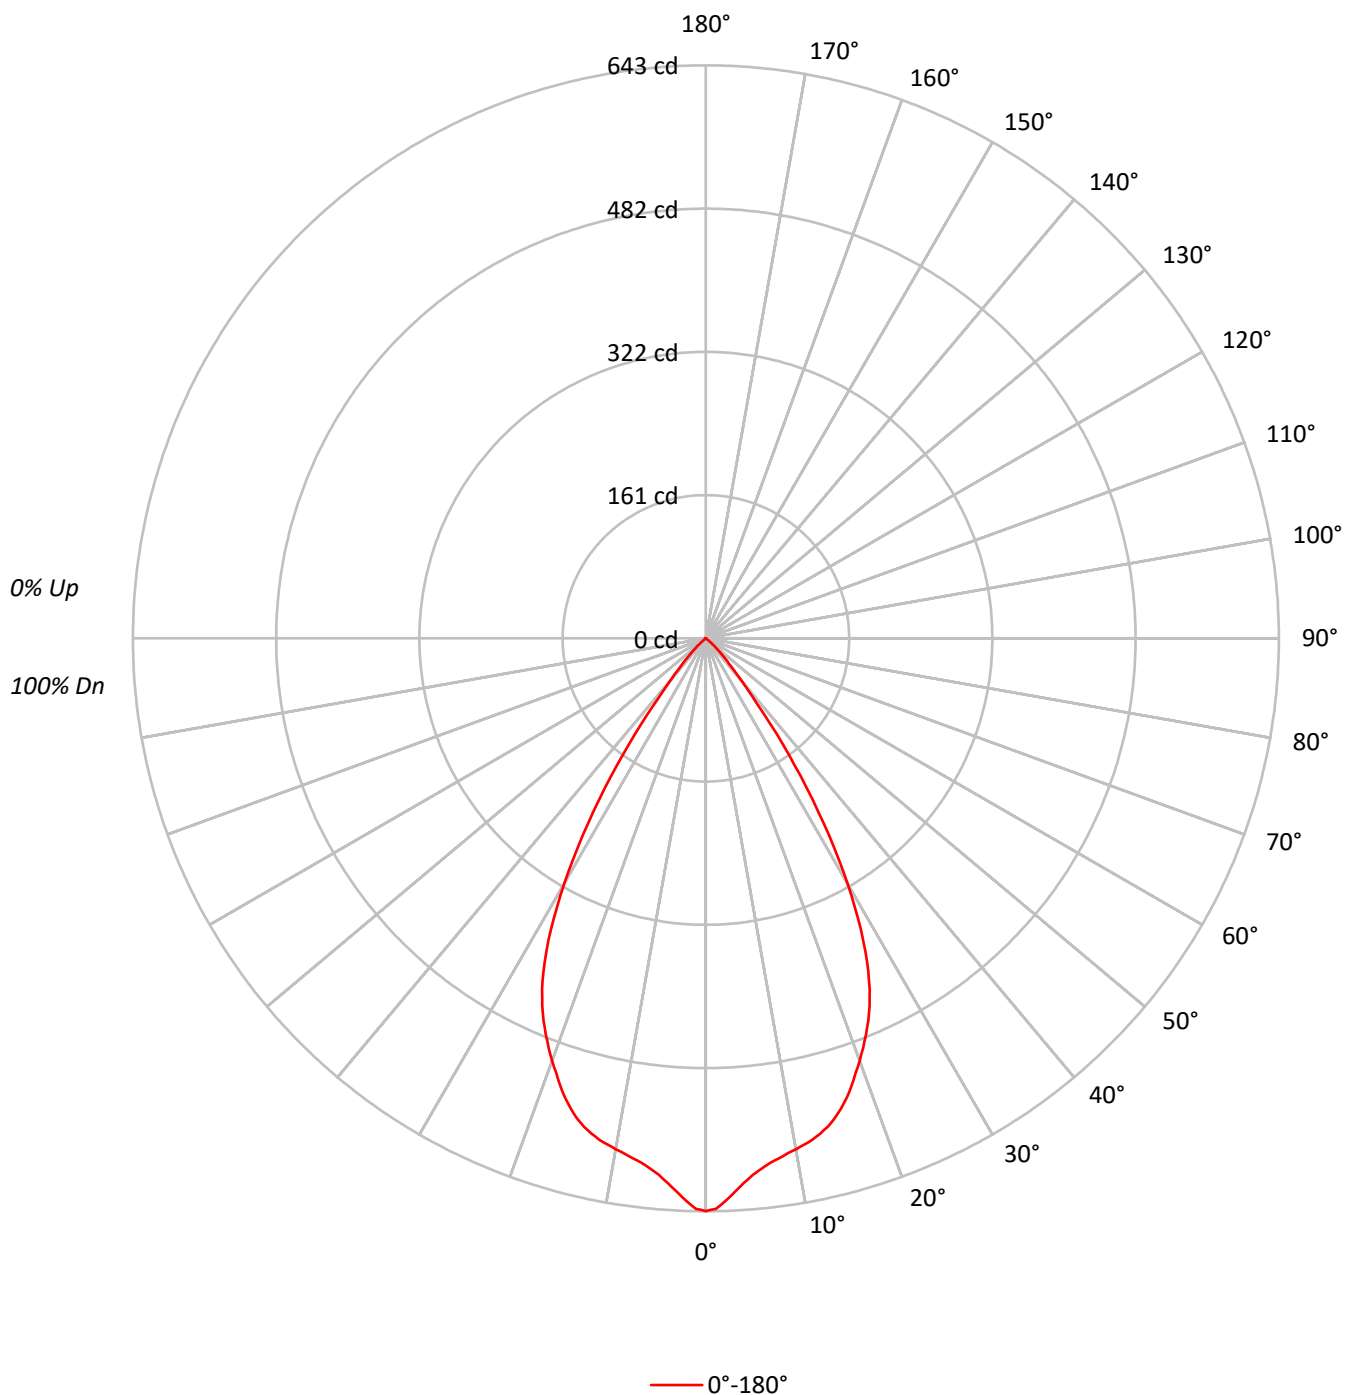

TEST NUMBER: P1264442

CATALOG NUMBER: P3A05R609730DE010 E3D1WMH

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20
RC	80				70				50				30				10
RW	70	50	30	10	70	50	30	10	50	30	10		50	30	10		50
RCR																	
0	119	119	119	119	116	116	116	116	111	111	111		106	106	106		102
1	114	111	109	106	111	109	107	105	105	103	102		101	100	99		98
2	108	104	100	96	106	102	98	95	99	96	93		96	93	91		93
3	103	97	92	88	101	96	91	88	93	89	86		91	87	85		88
4	98	91	85	81	96	90	85	81	88	83	80		86	82	79		84
5	93	85	80	75	92	84	79	75	83	78	74		81	77	74		79
6	89	80	74	70	87	79	74	70	78	73	70		77	72	69		75
7	85	76	70	66	83	75	69	65	74	69	65		72	68	65		71
8	81	71	65	61	79	71	65	61	70	65	61		69	64	61		68
9	77	67	62	58	76	67	61	58	66	61	57		65	61	57		64
10	73	64	58	54	72	63	58	54	63	58	54		62	57	54		61

AVERAGE LUMINANCE (cd/sqm):

	0°
0°	140954
5°	133084
10°	129612
15°	126652
20°	117750
25°	105272
30°	80417
35°	46418
40°	18005
45°	7505
50°	1637
55°	268
60°	175
65°	104
70°	128
75°	0
80°	0
85°	0

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 0°

Vertical Angle: 45°

Luminance: 7505 cd/sqm

TEST NUMBER: P1264442

CATALOG NUMBER: P3A05R609730DE010 E3D1WMH

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	57.1	10.6
10°-20°	155.4	28.9
20°-30°	194.6	36.2
30°-40°	108.8	20.2
40°-50°	20.7	3.8
50°-60°	1.0	0.2
60°-70°	0.2	0.0
70°-80°	0.1	0.0
80°-90°	0.0	0.0
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	407.1	75.7
0°-40°	515.9	95.9
0°-60°	537.6	99.9
0°-90°	537.9	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	537.9	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	643	
5°	605	57
15°	558	155
25°	435	195
35°	173	109
45°	24	21
55°	1	1
65°	0	0
75°	0	0
85°	0	0
90°	0	

TEST NUMBER: P1264442

CATALOG NUMBER: P3A05R609730DE010 E3D1WMH

CANDELA DISTRIBUTION (FULL):

0°	
0°	642.8
1°	640.2
2°	631.8
3°	621.9
4°	612.7
5°	604.6
6°	598.4
7°	593.1
8°	589.1
9°	585.4
10°	582.1
11°	578.8
12°	575.1
13°	570.4
14°	564.9
15°	557.9
16°	549.3
17°	539.6
18°	528.6
19°	516.1
20°	504.6
21°	492.3
22°	479.5
23°	466.1
24°	451.4
25°	435.1
26°	415.9
27°	394.6
28°	370.6
29°	345.1
30°	317.6
31°	289.8
32°	261.2
32.5°	245.6
33°	231.5
34°	202.3
35°	173.4
36°	147.5
37°	119.9
37.5°	107.4
38°	95.1
39°	76.6
40°	62.9
42.5°	38.3
45°	24.2



TEST NUMBER: P1264442

CATALOG NUMBER: P3A05R609730DE010 E3D1WMH

CANDELA DISTRIBUTION (continued):

	0°
47.5°	13.4
50°	4.8
52.5°	1.1
55°	0.7
57.5°	0.4
60°	0.4
62.5°	0.2
65°	0.2
67.5°	0.2
70°	0.2
72.5°	0.2
75°	0.0
77.5°	0.0
80°	0.0
82.5°	0.0
85°	0.0
87.5°	0.0
90°	0.0

(END OF REPORT)