

Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for
Cooper Lighting Solutions

Brand: IRiS

Report Number: P1264628

Luminaire Tested: P3A09R259730DE010 E3DLD1WMH

Issue Date: 1/30/2026

Test Information

Test Method: LM-79-2019
Report Number: P1264628
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2601-647-10)
Test Lab: INNOVATION CENTER
Issue Date: 1/30/2026
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: IRiS
Catalog Number: P3A09R259730DE010 E3DLD1WMH
Description: 3in Adjustable LED luminaire with, R25 optic, 3000K CCT AND, 97CRI , E3DLD1WMH TRIM
Light Source: -
Ballast/Driver: -

Summary


Lumens per Lamp: N/A
Luminaire Lumens: 527.0 lumens
Efficiency: N/A
Efficacy: 47.5 lumens/watt
Spacing Criteria (0/90/45): 0.78 / 0.78 / 0.85
Luminous Opening: Circular (Dia: 0.25' x H: 0')
CIE Type: Direct

Input Watts (W): 11.1
Input Voltage (V): NR
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT

TEST NUMBER: P1264628

CATALOG NUMBER: P3A09R259730DE010 E3DLD1WMH

Luminous Intensity Polar Plot

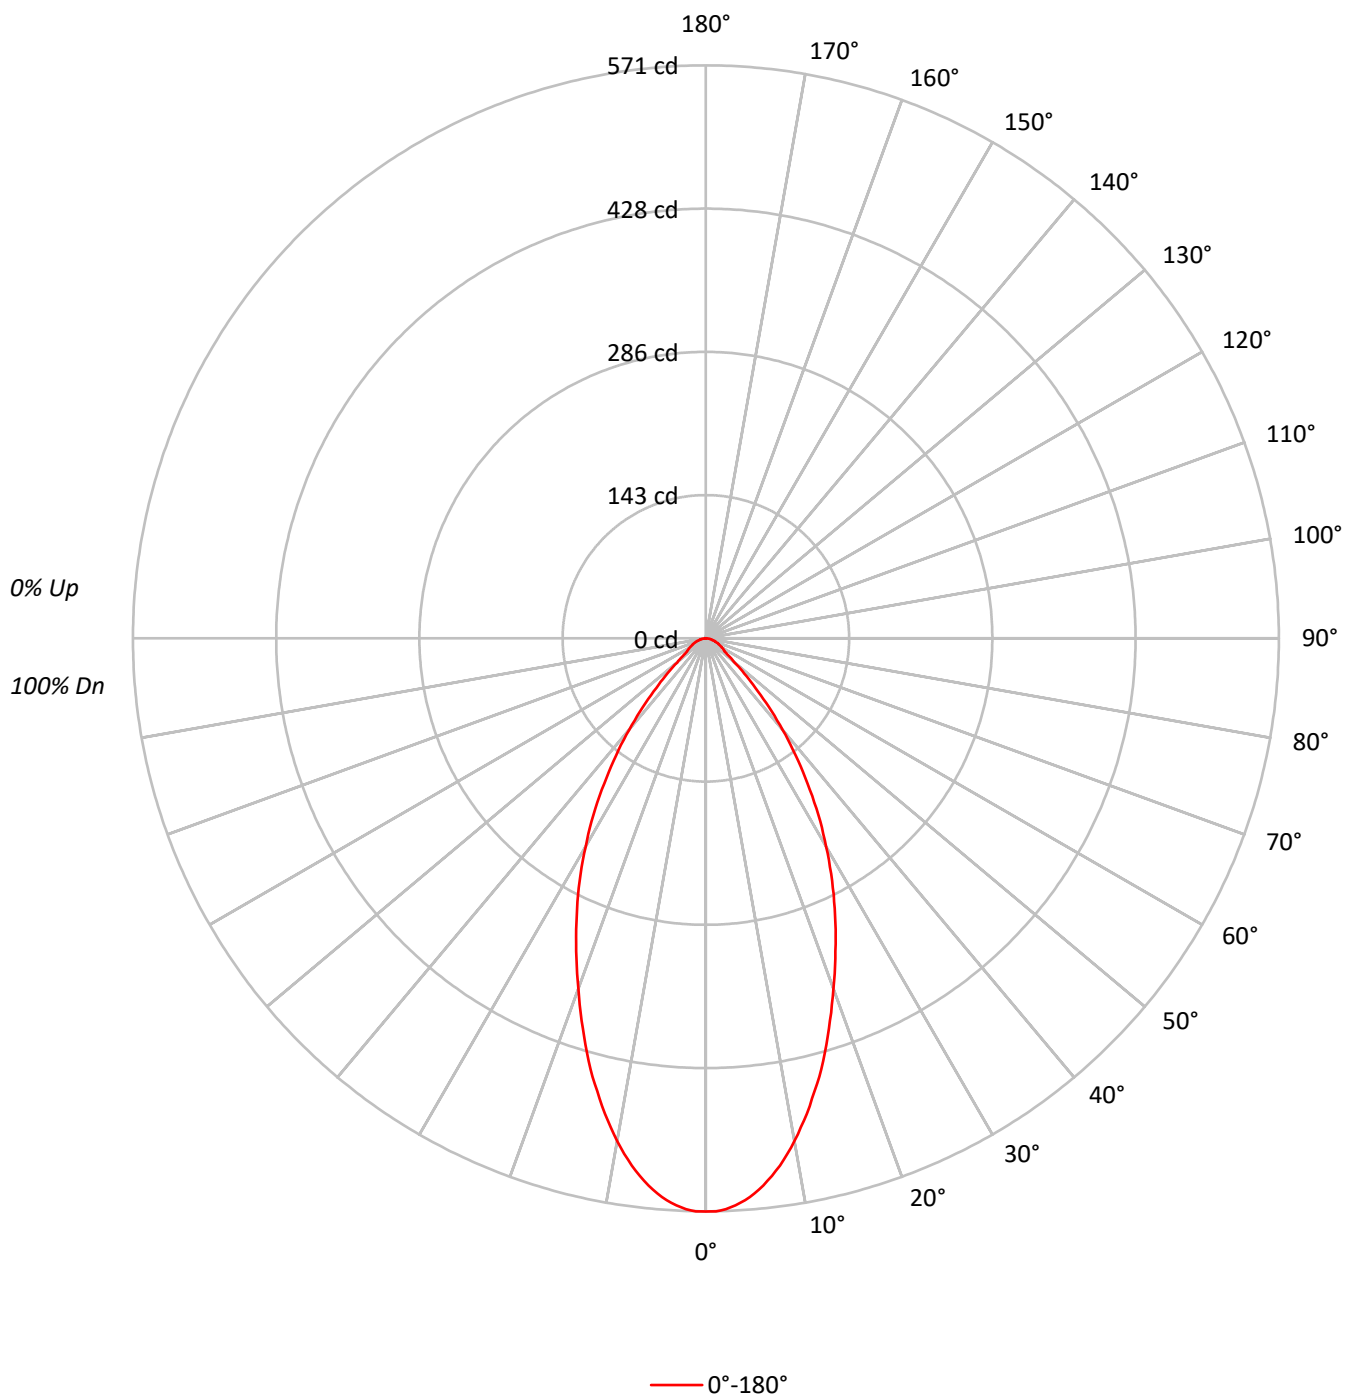

TEST NUMBER: P1264628

CATALOG NUMBER: P3A09R259730DE010 E3DLD1WMH

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20
RC	80				70				50				30				10
RW	70	50	30	10	70	50	30	10	50	30	10		50	30	10		50
RCR																	
0	119	119	119	119	116	116	116	116	111	111	111		106	106	106		102
1	112	109	106	104	110	107	105	102	103	101	99		99	98	96		96
2	106	100	96	92	104	99	94	91	95	92	89		92	89	87		89
3	100	92	87	82	98	91	86	82	88	84	80		86	82	79		83
4	94	85	79	74	92	84	78	74	82	77	73		80	76	72		78
5	89	79	73	68	87	78	72	68	76	71	67		75	70	66		73
6	84	74	67	62	82	73	67	62	71	66	62		70	65	61		69
7	79	69	62	58	78	68	62	58	67	61	57		66	61	57		65
8	75	65	58	54	74	64	58	53	63	57	53		62	57	53		61
9	71	61	54	50	70	60	54	50	59	54	50		58	53	50		57
10	68	57	51	47	67	57	51	47	56	50	47		55	50	46		54

AVERAGE LUMINANCE (cd/sqm):

	0°
0°	125253
5°	122254
10°	113291
15°	100909
20°	86714
25°	73698
30°	60668
35°	47274
40°	34007
45°	21584
50°	12759
55°	8793
60°	8070
65°	7472
70°	6732
75°	6100
80°	5809
85°	5032

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 0°

Vertical Angle: 45°

Luminance: 21584 cd/sqm

TEST NUMBER: P1264628

CATALOG NUMBER: P3A09R259730DE010 E3DLD1WMH

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	51.5	9.8
10°-20°	123.4	23.4
20°-30°	139.4	26.5
30°-40°	110.3	20.9
40°-50°	55.7	10.6
50°-60°	22.3	4.2
60°-70°	14.3	2.7
70°-80°	7.9	1.5
80°-90°	2.3	0.4
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	314.3	59.6
0°-40°	424.6	80.6
0°-60°	502.6	95.4
0°-90°	527.0	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	527.0	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	571	
5°	555	52
15°	444	123
25°	305	139
35°	177	110
45°	70	56
55°	23	22
65°	14	14
75°	7	8
85°	2	2
90°	0	

TEST NUMBER: P1264628

CATALOG NUMBER: P3A09R259730DE010 E3DLD1WMH

CANDELA DISTRIBUTION (FULL):

0°	
0°	571.2
1°	571.2
2°	569.2
3°	565.9
4°	561.3
5°	555.4
6°	548.2
7°	539.7
8°	530.5
9°	520.0
10°	508.8
11°	496.3
12°	484.5
13°	470.7
14°	457.6
15°	444.5
17.5°	407.7
20°	371.6
22.5°	337.5
25°	304.6
27.5°	272.5
30°	239.6
32.5°	208.8
35°	176.6
37.5°	147.1
40°	118.8
42.5°	92.6
45°	69.6
47.5°	51.9
50°	37.4
52.5°	28.2
55°	23.0
57.5°	21.0
60°	18.4
62.5°	16.4
65°	14.4
67.5°	12.5
70°	10.5
72.5°	9.2
75°	7.2
77.5°	5.9
80°	4.6
82.5°	3.3
85°	2.0
87.5°	0.7



TEST NUMBER: P1264628

CATALOG NUMBER: P3A09R259730DE010 E3DLD1WMH

CANDELA DISTRIBUTION (continued):

0°
90° | 0.0

(END OF REPORT)