

Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for
Cooper Lighting Solutions

Brand: IRiS

Report Number: P1264823

Luminaire Tested: P3A09R609730DE010 E3DL1LI

Issue Date: 1/30/2026

Test Information

Test Method: LM-79-2019
Report Number: P1264823
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2601-647-39)
Test Lab: INNOVATION CENTER
Issue Date: 1/30/2026
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: IRiS
Catalog Number: P3A09R609730DE010 E3DL1LI
Description: 3in Adjustable LED luminaire with, R60 optic, 3000K CCT AND, 97CRI , E3DL1LI TRIM
Light Source: -
Ballast/Driver: -


Summary

Lumens per Lamp: N/A
Luminaire Lumens: 690.0 lumens
Efficiency: N/A
Efficacy: 62.2 lumens/watt
Spacing Criteria (0/90/45): 0.87 / 0.87 / 0.87
Luminous Opening: Circular (Dia: 0.25' x H: 0')
CIE Type: Direct

Input Watts (W): 11.1
Input Voltage (V): NR
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT

TEST NUMBER: P1264823
CATALOG NUMBER: P3A09R609730DE010 E3DL1LI

Luminous Intensity Polar Plot

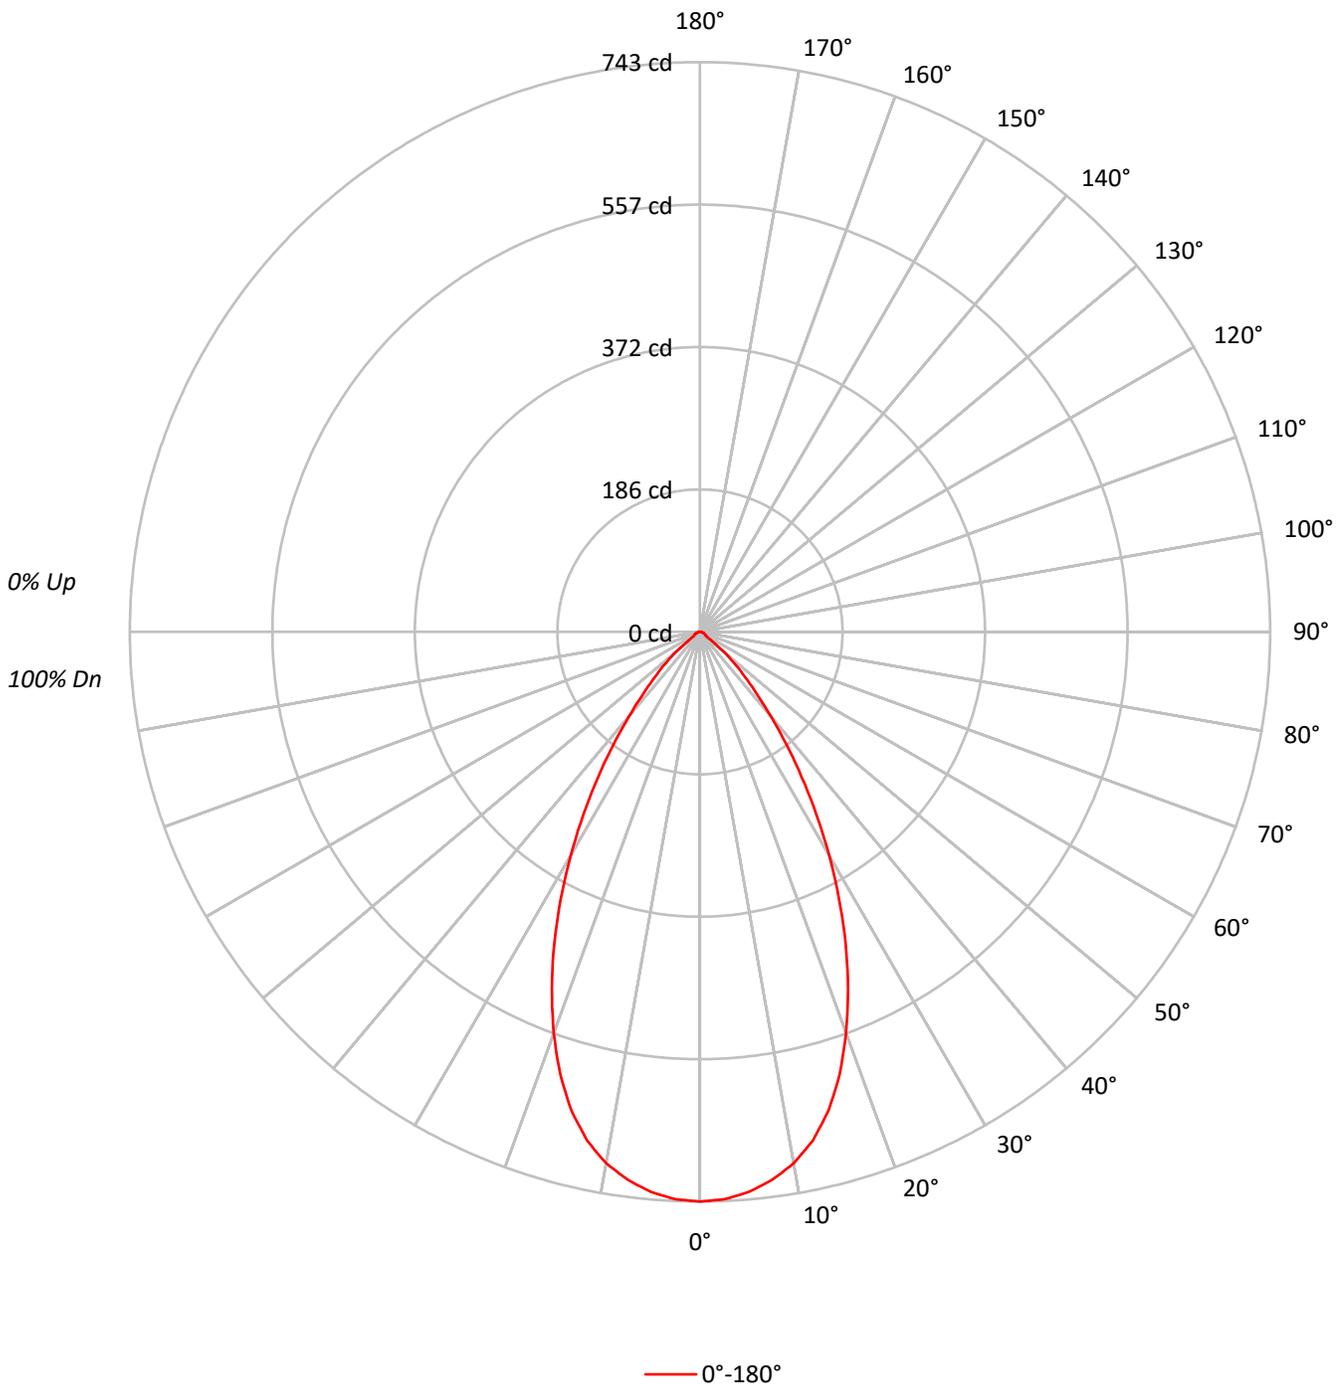



TEST NUMBER: P1264823

CATALOG NUMBER: P3A09R609730DE010 E3DL1LI

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20				
RC	80				70				50				30				10			0	
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																					
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100			100
1	113	110	108	105	111	108	106	103	104	102	100	100	99	97	97	96	94	93			93
2	107	102	98	94	105	100	96	93	97	94	91	94	91	89	91	89	87	85			85
3	101	95	89	85	99	93	88	84	91	86	83	88	85	82	86	83	80	79			79
4	96	88	82	78	94	87	81	77	85	80	76	83	79	75	81	77	75	73			73
5	91	82	76	71	89	81	75	71	79	74	70	78	73	70	76	72	69	68			68
6	86	77	70	66	84	76	70	66	74	69	65	73	68	65	72	68	64	63			63
7	82	72	66	61	80	71	65	61	70	65	61	69	64	60	67	63	60	59			59
8	77	68	61	57	76	67	61	57	66	60	57	65	60	56	64	59	56	55			55
9	74	64	57	53	72	63	57	53	62	57	53	61	56	53	60	56	53	51			51
10	70	60	54	50	69	60	54	50	59	53	50	58	53	50	57	53	49	48			48

AVERAGE LUMINANCE (cd/sqm):

	0°
0°	162926
5°	161391
10°	156688
15°	146789
20°	129931
25°	108684
30°	85178
35°	61783
40°	41106
45°	25615
50°	13884
55°	4014
60°	3728
65°	3424
70°	3334
75°	3304
80°	3283
85°	3271

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 0°
 Vertical Angle: 45°
 Luminance: 25615 cd/sqm



TEST NUMBER: P1264823

CATALOG NUMBER: P3A09R609730DE010 E3DL1LI

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	69.0	10.0
10°-20°	179.4	26.0
20°-30°	204.5	29.6
30°-40°	145.0	21.0
40°-50°	65.8	9.5
50°-60°	14.0	2.0
60°-70°	6.7	1.0
70°-80°	4.1	0.6
80°-90°	1.4	0.2
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	452.9	65.6
0°-40°	597.9	86.7
0°-60°	677.7	98.2
0°-90°	690.0	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	690.0	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	743	
5°	733	69
15°	647	179
25°	449	204
35°	231	145
45°	83	66
55°	10	14
65°	7	7
75°	4	4
85°	1	1
90°	0	



TEST NUMBER: P1264823
CATALOG NUMBER: P3A09R609730DE010 E3DL1LI

CANDELA DISTRIBUTION (FULL):

	0°
0°	743.0
2.5°	740.4
5°	733.2
7.5°	720.7
10°	703.7
12.5°	679.4
15°	646.6
17.5°	605.3
20°	556.8
22.5°	504.3
25°	449.2
27.5°	392.8
30°	336.4
32.5°	282.7
35°	230.8
37.5°	184.9
40°	143.6
42.5°	108.9
45°	82.6
47.5°	61.6
50°	40.7
52.5°	19.0
55°	10.5
57.5°	9.2
60°	8.5
62.5°	7.9
65°	6.6
67.5°	5.9
70°	5.2
72.5°	4.6
75°	3.9
77.5°	3.3
80°	2.6
82.5°	2.0
85°	1.3
87.5°	0.7
90°	0.0

(END OF REPORT)