

Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for
Cooper Lighting Solutions

Brand: IRiS

Report Number: P1264832

Luminaire Tested: P3A09R609730DE010 E3DLD1WMH

Issue Date: 1/30/2026

Test Information

Test Method: LM-79-2019
Report Number: P1264832
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2601-647-38)
Test Lab: INNOVATION CENTER
Issue Date: 1/30/2026
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: IRiS
Catalog Number: P3A09R609730DE010 E3DLD1WMH
Description: 3in Adjustable LED luminaire with, R60 optic, 3000K CCT AND, 97CRI , E3DLD1WMH TRIM
Light Source: -
Ballast/Driver: -

Summary


Lumens per Lamp: N/A
Luminaire Lumens: 541.0 lumens
Efficiency: N/A
Efficacy: 48.7 lumens/watt
Spacing Criteria (0/90/45): 0.94 / 0.94 / 1
Luminous Opening: Circular (Dia: 0.25' x H: 0')
CIE Type: Direct

Input Watts (W): 11.1
Input Voltage (V): NR
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT

TEST NUMBER: P1264832

CATALOG NUMBER: P3A09R609730DE010 E3DLD1WMH

Luminous Intensity Polar Plot

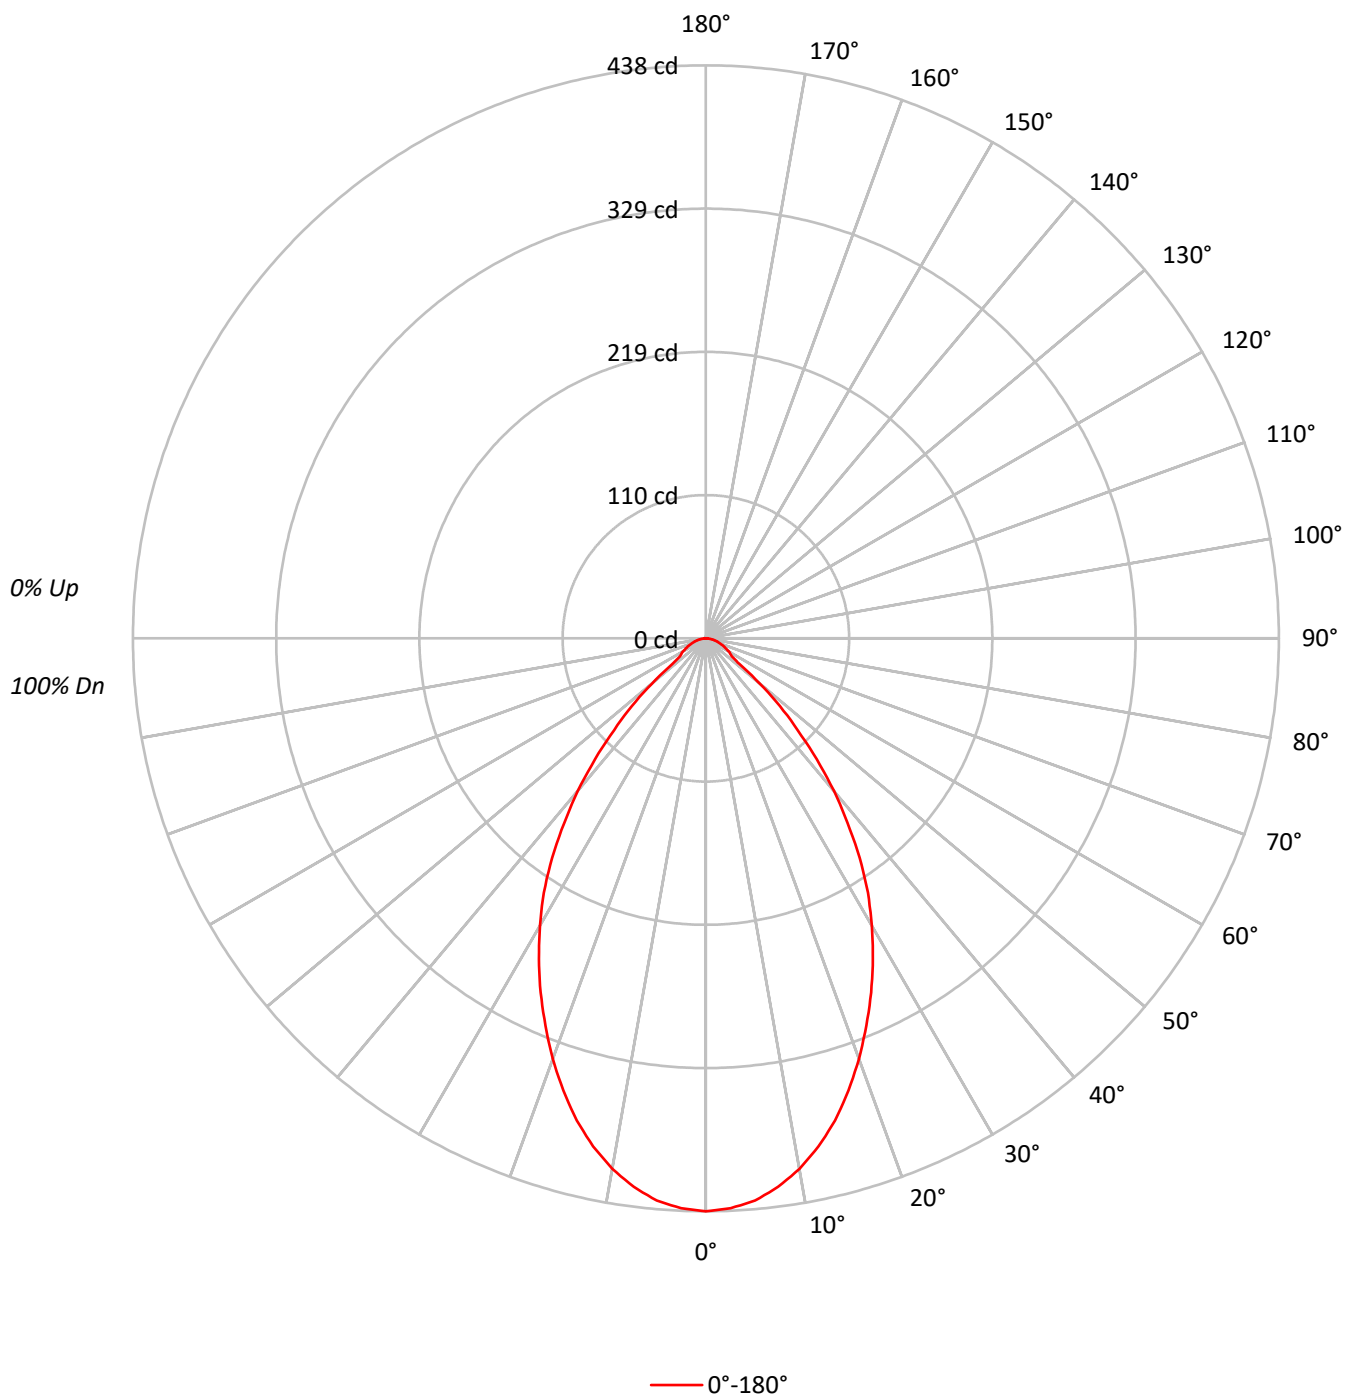

TEST NUMBER: P1264832

CATALOG NUMBER: P3A09R609730DE010 E3DLD1WMH

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20
RC	80				70				50				30				10
RW	70	50	30	10	70	50	30	10	50	30	10		50	30	10		50
RCR																	
0	119	119	119	119	116	116	116	116	111	111	111		106	106	106		102
1	112	109	106	103	110	107	104	101	102	100	98		99	97	95		95
2	105	99	94	90	103	97	93	89	94	90	87		91	88	85		88
3	99	91	85	80	96	89	84	79	87	82	78		84	80	77		82
4	92	83	77	72	90	82	76	71	80	75	70		78	73	70		76
5	87	77	70	65	85	76	69	65	74	68	64		72	67	63		71
6	82	71	64	59	80	70	64	59	69	63	58		67	62	58		66
7	77	66	59	54	75	65	59	54	64	58	54		63	57	53		61
8	72	61	55	50	71	61	54	50	60	54	49		59	53	49		58
9	68	57	51	46	67	57	50	46	56	50	46		55	49	46		54
10	65	54	47	43	64	53	47	43	52	47	43		52	46	42		51

AVERAGE LUMINANCE (cd/sqm):

	0°
0°	96045
5°	94959
10°	91671
15°	86607
20°	79830
25°	72294
30°	64187
35°	54850
40°	43596
45°	30732
50°	18353
55°	9290
60°	8947
65°	8198
70°	7565
75°	7202
80°	6693
85°	5032

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 0°

Vertical Angle: 45°

Luminance: 30732 cd/sqm

TEST NUMBER: P1264832

CATALOG NUMBER: P3A09R609730DE010 E3DLD1WMH

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	40.5	7.5
10°-20°	106.6	19.7
20°-30°	136.9	25.3
30°-40°	126.9	23.5
40°-50°	77.3	14.3
50°-60°	25.8	4.8
60°-70°	15.7	2.9
70°-80°	8.8	1.6
80°-90°	2.5	0.5
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	284.1	52.5
0°-40°	411.0	76.0
0°-60°	514.0	95.0
0°-90°	541.0	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	541.0	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	438	
5°	431	41
15°	382	107
25°	299	137
35°	205	127
45°	99	77
55°	24	26
65°	16	16
75°	8	9
85°	2	3
90°	0	

TEST NUMBER: P1264832

CATALOG NUMBER: P3A09R609730DE010 E3DLD1WMH

CANDELA DISTRIBUTION (FULL):

	0°
0°	438.0
2.5°	436.0
5°	431.4
7.5°	422.9
10°	411.7
12.5°	397.9
15°	381.5
17.5°	362.4
20°	342.1
22.5°	320.4
25°	298.8
27.5°	276.4
30°	253.5
32.5°	230.5
35°	204.9
37.5°	177.9
40°	152.3
42.5°	125.4
45°	99.1
47.5°	76.8
50°	53.8
52.5°	32.2
55°	24.3
57.5°	22.3
60°	20.4
62.5°	17.7
65°	15.8
67.5°	13.8
70°	11.8
72.5°	9.8
75°	8.5
77.5°	6.6
80°	5.3
82.5°	3.3
85°	2.0
87.5°	1.3
90°	0.0

(END OF REPORT)