

Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for
Cooper Lighting Solutions

Brand: IRiS

Report Number: P1264838

Luminaire Tested: P3A09R609730DE010 E3DLP1WMH

Issue Date: 1/30/2026

Test Information

Test Method: LM-79-2019
Report Number: P1264838
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2601-647-37)
Test Lab: INNOVATION CENTER
Issue Date: 1/30/2026
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: IRiS
Catalog Number: P3A09R609730DE010 E3DLP1WMH
Description: 3in Adjustable LED luminaire with, R60 optic, 3000K CCT AND, 97CRI , E3DLP1WMH TRIM
Light Source: -
Ballast/Driver: -

Summary


Lumens per Lamp: N/A
Luminaire Lumens: 477.0 lumens
Efficiency: N/A
Efficacy: 43.0 lumens/watt
Spacing Criteria (0/90/45): 0.79 / 0.79 / 0.83
Luminous Opening: Circular (Dia: 0.25' x H: 0')
CIE Type: Direct

Input Watts (W): 11.1
Input Voltage (V): NR
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT

TEST NUMBER: P1264838

CATALOG NUMBER: P3A09R609730DE010 E3DLP1WMH

Luminous Intensity Polar Plot

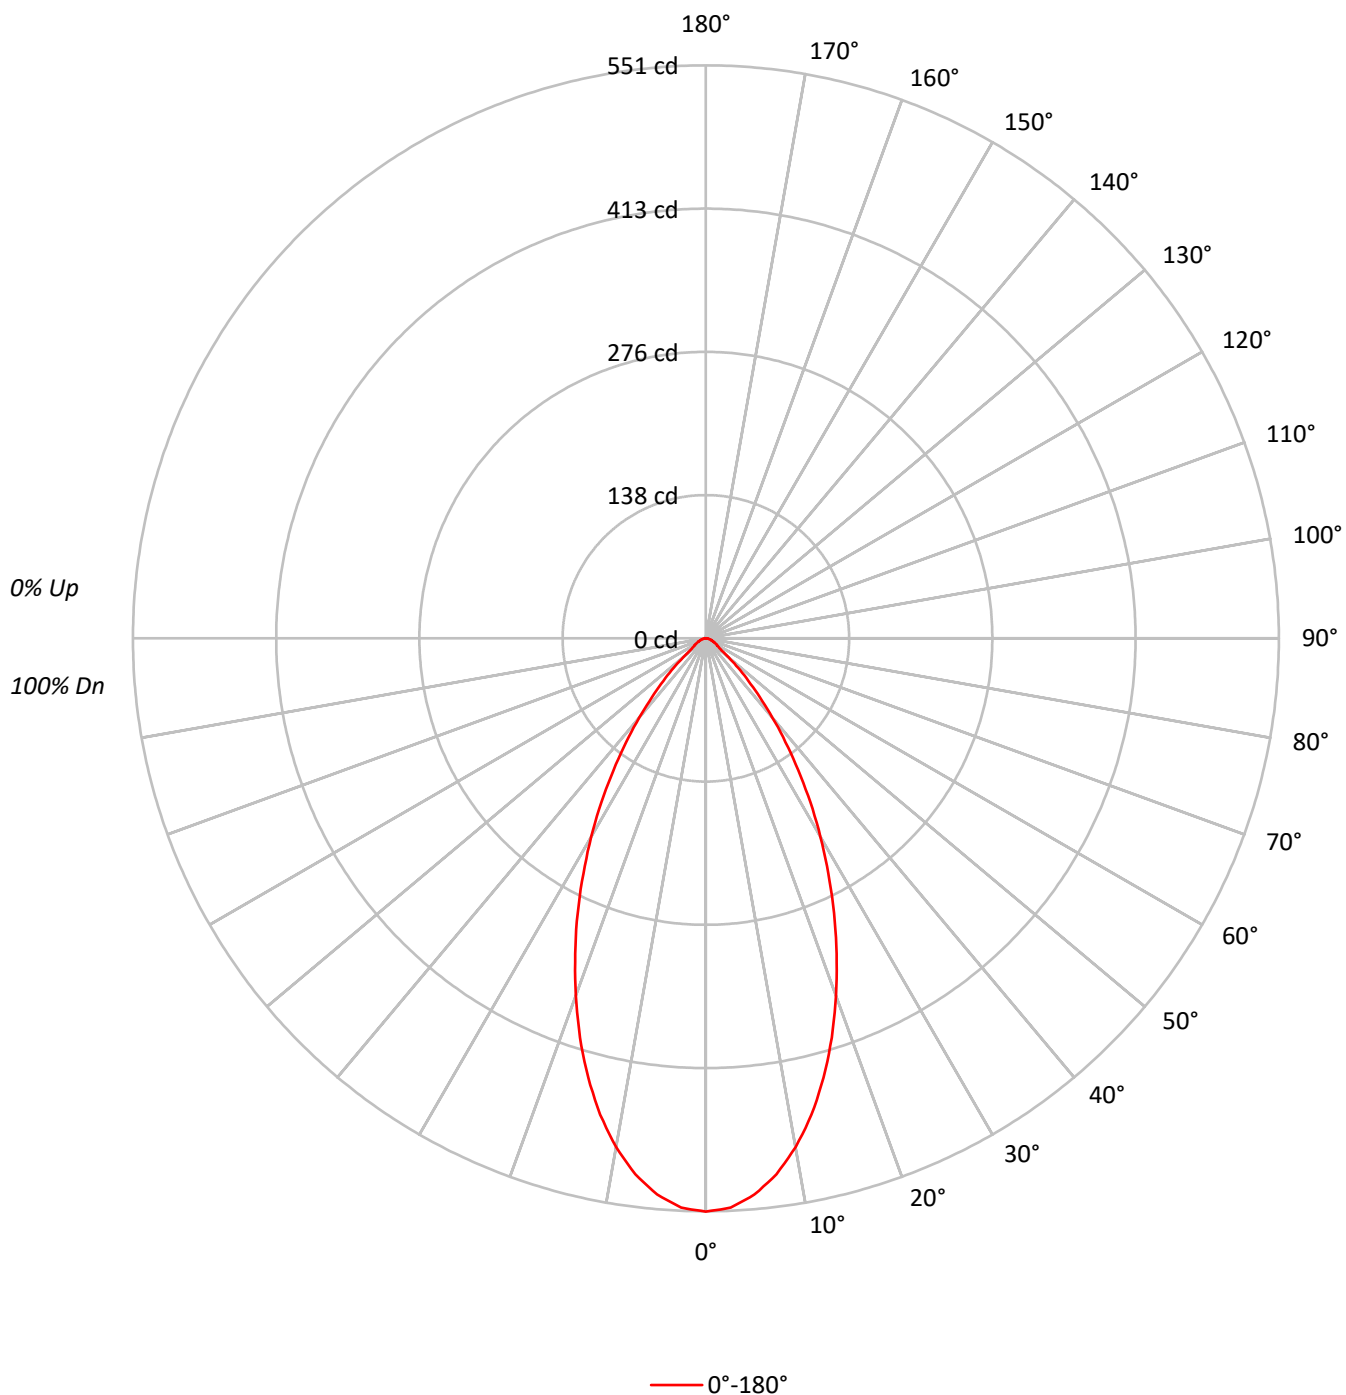

TEST NUMBER: P1264838

CATALOG NUMBER: P3A09R609730DE010 E3DLP1WMH

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20
RC	80				70				50				30				10
RW	70	50	30	10	70	50	30	10	50	30	10		50	30	10		50
RCR																	
0	119	119	119	119	116	116	116	116	111	111	111		106	106	106		102
1	113	110	107	105	110	108	105	103	104	102	100		100	98	97		96
2	107	101	97	93	104	100	96	92	96	93	90		93	91	88		91
3	101	94	88	84	99	92	87	83	90	86	82		87	84	81		85
4	95	87	81	77	93	86	80	76	84	79	75		82	78	74		80
5	90	81	75	70	88	80	74	70	78	73	69		77	72	69		75
6	85	76	69	65	84	75	69	65	73	68	64		72	67	64		71
7	81	71	65	60	79	70	64	60	69	64	60		68	63	59		67
8	77	67	60	56	75	66	60	56	65	60	56		64	59	55		63
9	73	63	57	52	72	62	56	52	61	56	52		60	55	52		60
10	69	59	53	49	68	59	53	49	58	53	49		57	52	49		56

AVERAGE LUMINANCE (cd/sqm):

	0°
0°	120889
5°	118182
10°	110641
15°	99251
20°	85361
25°	70577
30°	55781
35°	41412
40°	28511
45°	17893
50°	9825
55°	5773
60°	5175
65°	4410
70°	3783
75°	3897
80°	3283
85°	3271

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 0°

Vertical Angle: 45°

Luminance: 17893 cd/sqm

TEST NUMBER: P1264838

CATALOG NUMBER: P3A09R609730DE010 E3DLP1WMH

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	50.0	10.5
10°-20°	121.4	25.5
20°-30°	133.2	27.9
30°-40°	97.0	20.3
40°-50°	45.8	9.6
50°-60°	15.0	3.1
60°-70°	8.5	1.8
70°-80°	4.6	1.0
80°-90°	1.4	0.3
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	304.6	63.9
0°-40°	401.6	84.2
0°-60°	462.5	97.0
0°-90°	477.0	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	477.0	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	551	
5°	537	50
15°	437	121
25°	292	133
35°	155	97
45°	58	46
55°	15	15
65°	8	8
75°	5	5
85°	1	1
90°	0	

TEST NUMBER: P1264838

CATALOG NUMBER: P3A09R609730DE010 E3DLP1WMH

CANDELA DISTRIBUTION (FULL):

	0°
0°	551.3
2.5°	548.0
5°	536.9
7.5°	519.8
10°	496.9
12.5°	469.3
15°	437.2
17.5°	402.5
20°	365.8
22.5°	328.4
25°	291.7
27.5°	255.0
30°	220.3
32.5°	186.8
35°	154.7
37.5°	125.9
40°	99.6
42.5°	76.7
45°	57.7
47.5°	42.0
50°	28.8
52.5°	19.0
55°	15.1
57.5°	13.1
60°	11.8
62.5°	9.8
65°	8.5
67.5°	7.2
70°	5.9
72.5°	5.2
75°	4.6
77.5°	3.3
80°	2.6
82.5°	2.0
85°	1.3
87.5°	0.7
90°	0.0

(END OF REPORT)