

Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for
Cooper Lighting Solutions

Brand: IRiS

Report Number: P1267390

Luminaire Tested: P3A13R209735DE010 E3DLD1WH

Issue Date: 1/30/2026

Test Information

Test Method: LM-79-2019
Report Number: P1267390
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2601-647-6)
Test Lab: INNOVATION CENTER
Issue Date: 1/30/2026
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: IRiS
Catalog Number: P3A13R209735DE010 E3DLD1WH
Description: 3in Adjustable LED luminaire with, R20 optic, 3500K CCT AND, 97CRI , E3DLD1WH TRIM
Light Source: -
Ballast/Driver: -


Summary

Lumens per Lamp: N/A
Luminaire Lumens: 713.0 lumens
Efficiency: N/A
Efficacy: 48.8 lumens/watt
Spacing Criteria (0/90/45): 0.76 / 0.76 / 0.83
Luminous Opening: Circular (Dia: 0.25' x H: 0')
CIE Type: Direct

Input Watts (W): 14.6
Input Voltage (V): NR
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT

TEST NUMBER: P1267390
CATALOG NUMBER: P3A13R209735DE010 E3DLD1WH

Luminous Intensity Polar Plot

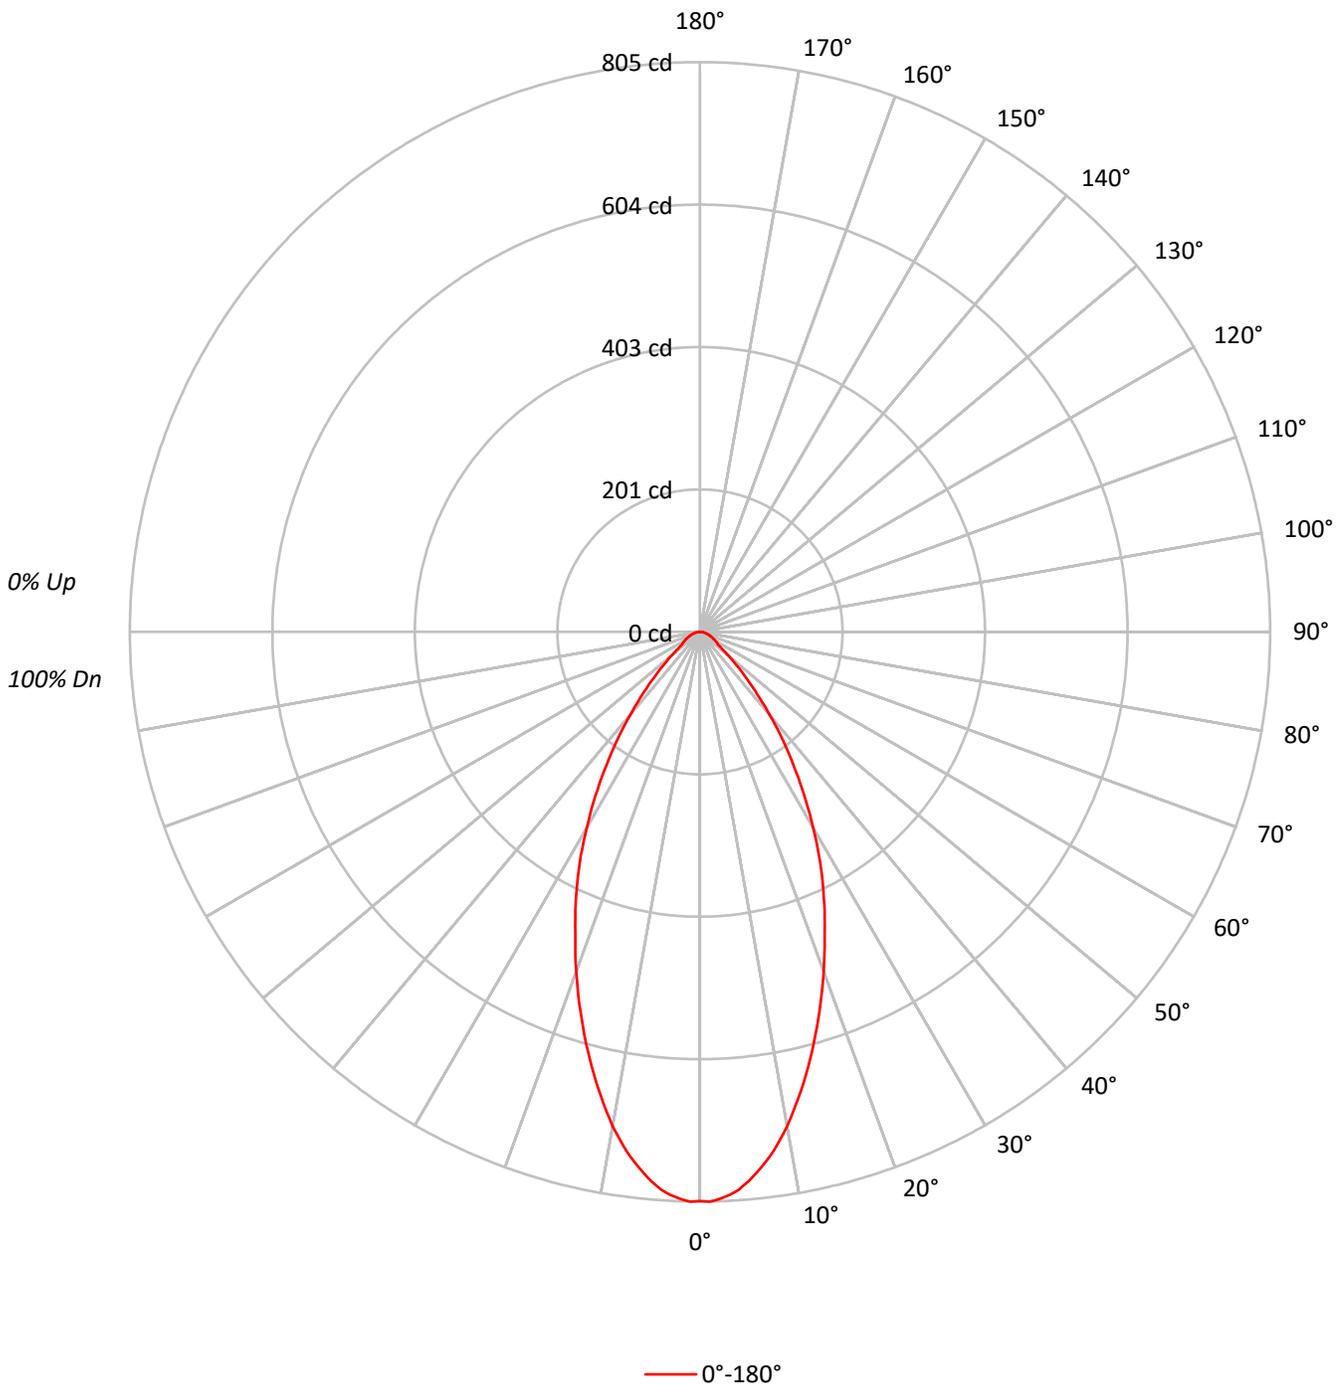



TEST NUMBER: P1267390

CATALOG NUMBER: P3A13R209735DE010 E3DLD1WH

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20				
RC	80				70				50				30				10			0	
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																					
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100	100	100	100
1	113	109	106	104	110	107	105	102	103	101	99	99	98	96	96	95	93	91	91	91	91
2	106	100	96	92	104	99	94	91	95	92	89	92	89	87	90	87	85	83	83	83	83
3	100	93	87	82	98	91	86	82	88	84	80	86	82	79	84	81	78	76	76	76	76
4	94	86	79	75	92	85	79	74	82	77	73	80	76	72	78	75	72	70	70	70	70
5	89	80	73	68	87	79	73	68	77	71	67	75	70	67	73	69	66	65	65	65	65
6	84	74	68	63	82	73	67	63	72	66	62	70	65	62	69	65	61	60	60	60	60
7	80	69	63	58	78	69	62	58	67	62	58	66	61	57	65	60	57	55	55	55	55
8	75	65	59	54	74	64	58	54	63	58	54	62	57	53	61	57	53	52	52	52	52
9	72	61	55	50	70	61	55	50	60	54	50	59	54	50	58	53	50	48	48	48	48
10	68	58	51	47	67	57	51	47	56	51	47	56	51	47	55	50	47	45	45	45	45

AVERAGE LUMINANCE (cd/sqm):

	0°
0°	176367
5°	171648
10°	157913
15°	139002
20°	119197
25°	100143
30°	80949
35°	61596
40°	43825
45°	28933
50°	17910
55°	11775
60°	10745
65°	9858
70°	9296
75°	8472
80°	7956
85°	6793

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 0°
 Vertical Angle: 45°
 Luminance: 28933 cd/sqm



TEST NUMBER: P1267390
 CATALOG NUMBER: P3A13R209735DE010 E3DLD1WH

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	72.1	10.1
10°-20°	170.5	23.9
20°-30°	189.2	26.5
30°-40°	144.3	20.2
40°-50°	73.9	10.4
50°-60°	30.4	4.3
60°-70°	18.9	2.7
70°-80°	10.7	1.5
80°-90°	3.1	0.4
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	431.8	60.6
0°-40°	576.1	80.8
0°-60°	680.4	95.4
0°-90°	713.0	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	713.0	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	804	
5°	780	72
15°	612	170
25°	414	189
35°	230	144
45°	93	74
55°	31	30
65°	19	19
75°	10	11
85°	3	3
90°	0	



TEST NUMBER: P1267390
CATALOG NUMBER: P3A13R209735DE010 E3DLD1WH

CANDELA DISTRIBUTION (FULL):

0°	
0°	804.3
1°	805.2
2°	801.6
3°	797.0
4°	789.8
5°	779.8
6°	768.0
7°	755.4
8°	741.8
9°	725.5
10°	709.2
12.5°	662.1
15°	612.3
17.5°	561.5
20°	510.8
22.5°	460.1
25°	413.9
27.5°	367.7
30°	319.7
32.5°	274.4
35°	230.1
37.5°	191.1
40°	153.1
42.5°	120.5
45°	93.3
47.5°	70.6
50°	52.5
52.5°	38.9
55°	30.8
57.5°	28.1
60°	24.5
62.5°	21.7
65°	19.0
67.5°	16.3
70°	14.5
72.5°	11.8
75°	10.0
77.5°	8.2
80°	6.3
82.5°	4.5
85°	2.7
87.5°	0.9
90°	0.0

(END OF REPORT)