

Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for
Cooper Lighting Solutions

Brand: IRiS

Report Number: P1267473

Luminaire Tested: P3A13R359735DE010 E3DLD1GPH

Issue Date: 1/30/2026

Test Information

Test Method: LM-79-2019
Report Number: P1267473
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2601-647-18)
Test Lab: INNOVATION CENTER
Issue Date: 1/30/2026
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: IRiS
Catalog Number: P3A13R359735DE010 E3DLD1GPH
Description: 3in Adjustable LED luminaire with, R35 optic, 3500K CCT AND, 97CRI , E3DLD1GPH TRIM
Light Source: -
Ballast/Driver: -

Summary


Lumens per Lamp: N/A
Luminaire Lumens: 359.0 lumens
Efficiency: N/A
Efficacy: 24.6 lumens/watt
Spacing Criteria (0/90/45): 0.8 / 0.8 / 0.87
Luminous Opening: Circular (Dia: 0.25' x H: 0')
CIE Type: Direct

Input Watts (W): 14.6
Input Voltage (V): NR
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT

TEST NUMBER: P1267473

CATALOG NUMBER: P3A13R359735DE010 E3DLD1GPH

Luminous Intensity Polar Plot

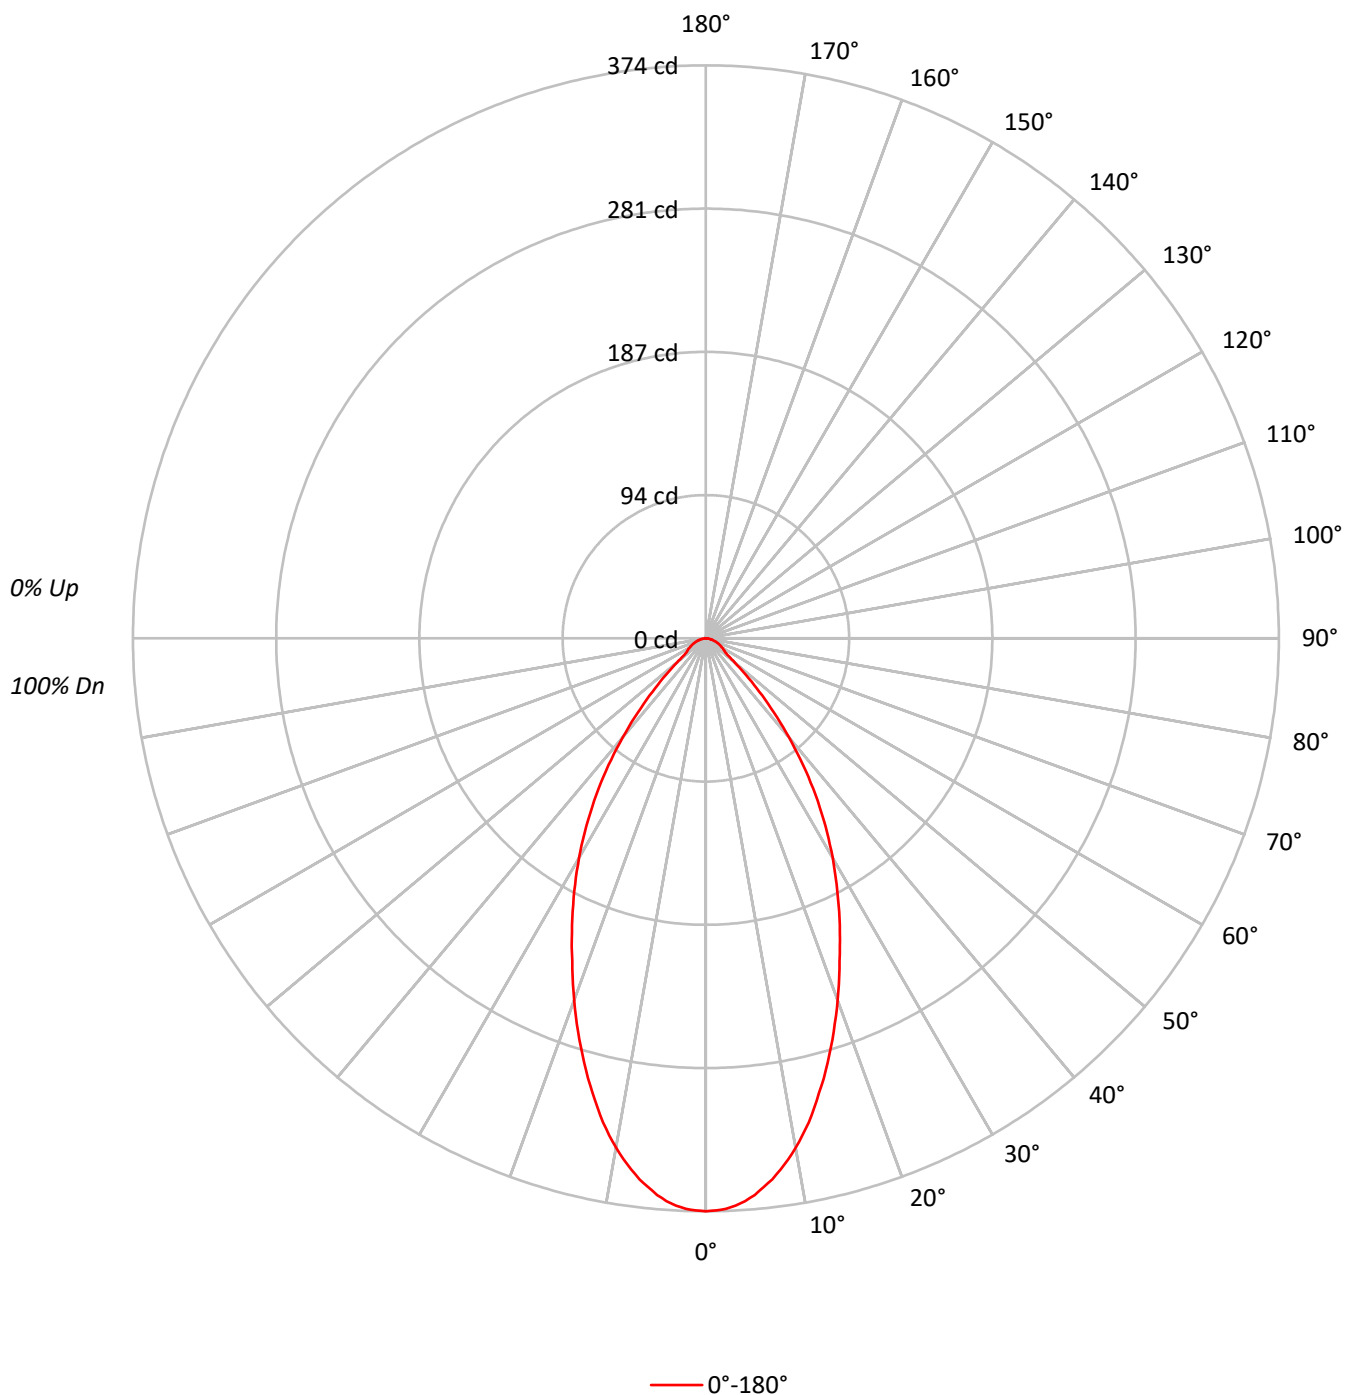

TEST NUMBER: P1267473

CATALOG NUMBER: P3A13R359735DE010 E3DLD1GPH

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20
RC	80				70				50				30				10
RW	70	50	30	10	70	50	30	10	50	30	10		50	30	10		50
RCR																	
0	119	119	119	119	116	116	116	116	111	111	111		106	106	106		102
1	112	109	106	104	110	107	104	102	103	101	99		99	98	96		96
2	106	100	96	92	104	98	94	91	95	92	89		92	89	87		89
3	100	92	87	82	98	91	86	81	88	84	80		86	82	79		83
4	94	85	79	74	92	84	78	74	82	77	73		80	75	72		78
5	89	79	73	68	87	78	72	67	76	71	67		75	70	66		73
6	84	74	67	62	82	73	67	62	71	66	61		70	65	61		68
7	79	69	62	57	78	68	62	57	67	61	57		65	60	57		64
8	75	64	58	53	74	64	57	53	63	57	53		62	56	53		61
9	71	60	54	50	70	60	54	50	59	53	49		58	53	49		57
10	67	57	51	46	66	56	50	46	56	50	46		55	50	46		54

AVERAGE LUMINANCE (cd/sqm):

	0°
0°	82011
5°	80277
10°	75171
15°	67469
20°	58688
25°	50011
30°	41905
35°	33381
40°	24131
45°	15257
50°	8324
55°	5773
60°	5438
65°	5085
70°	4809
75°	4151
80°	3915
85°	3271

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 0°

Vertical Angle: 45°

Luminance: 15257 cd/sqm

TEST NUMBER: P1267473

CATALOG NUMBER: P3A13R359735DE010 E3DLD1GPH

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	33.9	9.5
10°-20°	82.7	23.0
20°-30°	94.8	26.4
30°-40°	77.4	21.6
40°-50°	39.0	10.9
50°-60°	14.5	4.0
60°-70°	9.7	2.7
70°-80°	5.4	1.5
80°-90°	1.6	0.5
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	211.4	58.9
0°-40°	288.8	80.4
0°-60°	342.3	95.3
0°-90°	359.0	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	359.0	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	374	
5°	365	34
15°	297	83
25°	207	95
35°	125	77
45°	49	39
55°	15	14
65°	10	10
75°	5	5
85°	1	2
90°	0	

TEST NUMBER: P1267473

CATALOG NUMBER: P3A13R359735DE010 E3DLD1GPH

CANDELA DISTRIBUTION (FULL):

0°	
0°	374.0
1°	373.5
2°	372.6
3°	370.9
4°	368.2
5°	364.7
6°	360.2
7°	355.8
8°	350.0
9°	344.3
10°	337.6
11°	330.5
12°	323.0
13°	314.5
14°	305.7
15°	297.2
17.5°	274.6
20°	251.5
22.5°	228.0
25°	206.7
27.5°	185.9
30°	165.5
32.5°	145.1
35°	124.7
37.5°	104.3
40°	84.3
42.5°	65.7
45°	49.2
47.5°	35.5
50°	24.4
52.5°	17.7
55°	15.1
57.5°	13.8
60°	12.4
62.5°	11.1
65°	9.8
67.5°	8.4
70°	7.5
72.5°	6.2
75°	4.9
77.5°	4.0
80°	3.1
82.5°	2.2
85°	1.3
87.5°	0.9



TEST NUMBER: P1267473

CATALOG NUMBER: P3A13R359735DE010 E3DLD1GPH

CANDELA DISTRIBUTION (continued):

0°
90° | 0.0

(END OF REPORT)