

Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for
Cooper Lighting Solutions

Brand: IRiS

Report Number: P1267474

Luminaire Tested: P3A13R359735DE010 E3DLD1H

Issue Date: 1/30/2026

Test Information

Test Method: LM-79-2019
Report Number: P1267474
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2601-647-18)
Test Lab: INNOVATION CENTER
Issue Date: 1/30/2026
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: IRiS
Catalog Number: P3A13R359735DE010 E3DLD1H
Description: 3in Adjustable LED luminaire with, R35 optic, 3500K CCT AND, 97CRI , E3DLD1H TRIM
Light Source: -
Ballast/Driver: -


Summary

Lumens per Lamp: N/A
Luminaire Lumens: 732.0 lumens
Efficiency: N/A
Efficacy: 50.1 lumens/watt
Spacing Criteria (0/90/45): 0.8 / 0.8 / 0.87
Luminous Opening: Circular (Dia: 0.25' x H: 0')
CIE Type: Direct

Input Watts (W): 14.6
Input Voltage (V): NR
Input Current (A_{in}): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT

TEST NUMBER: P1267474
CATALOG NUMBER: P3A13R359735DE010 E3DLD1H

Luminous Intensity Polar Plot

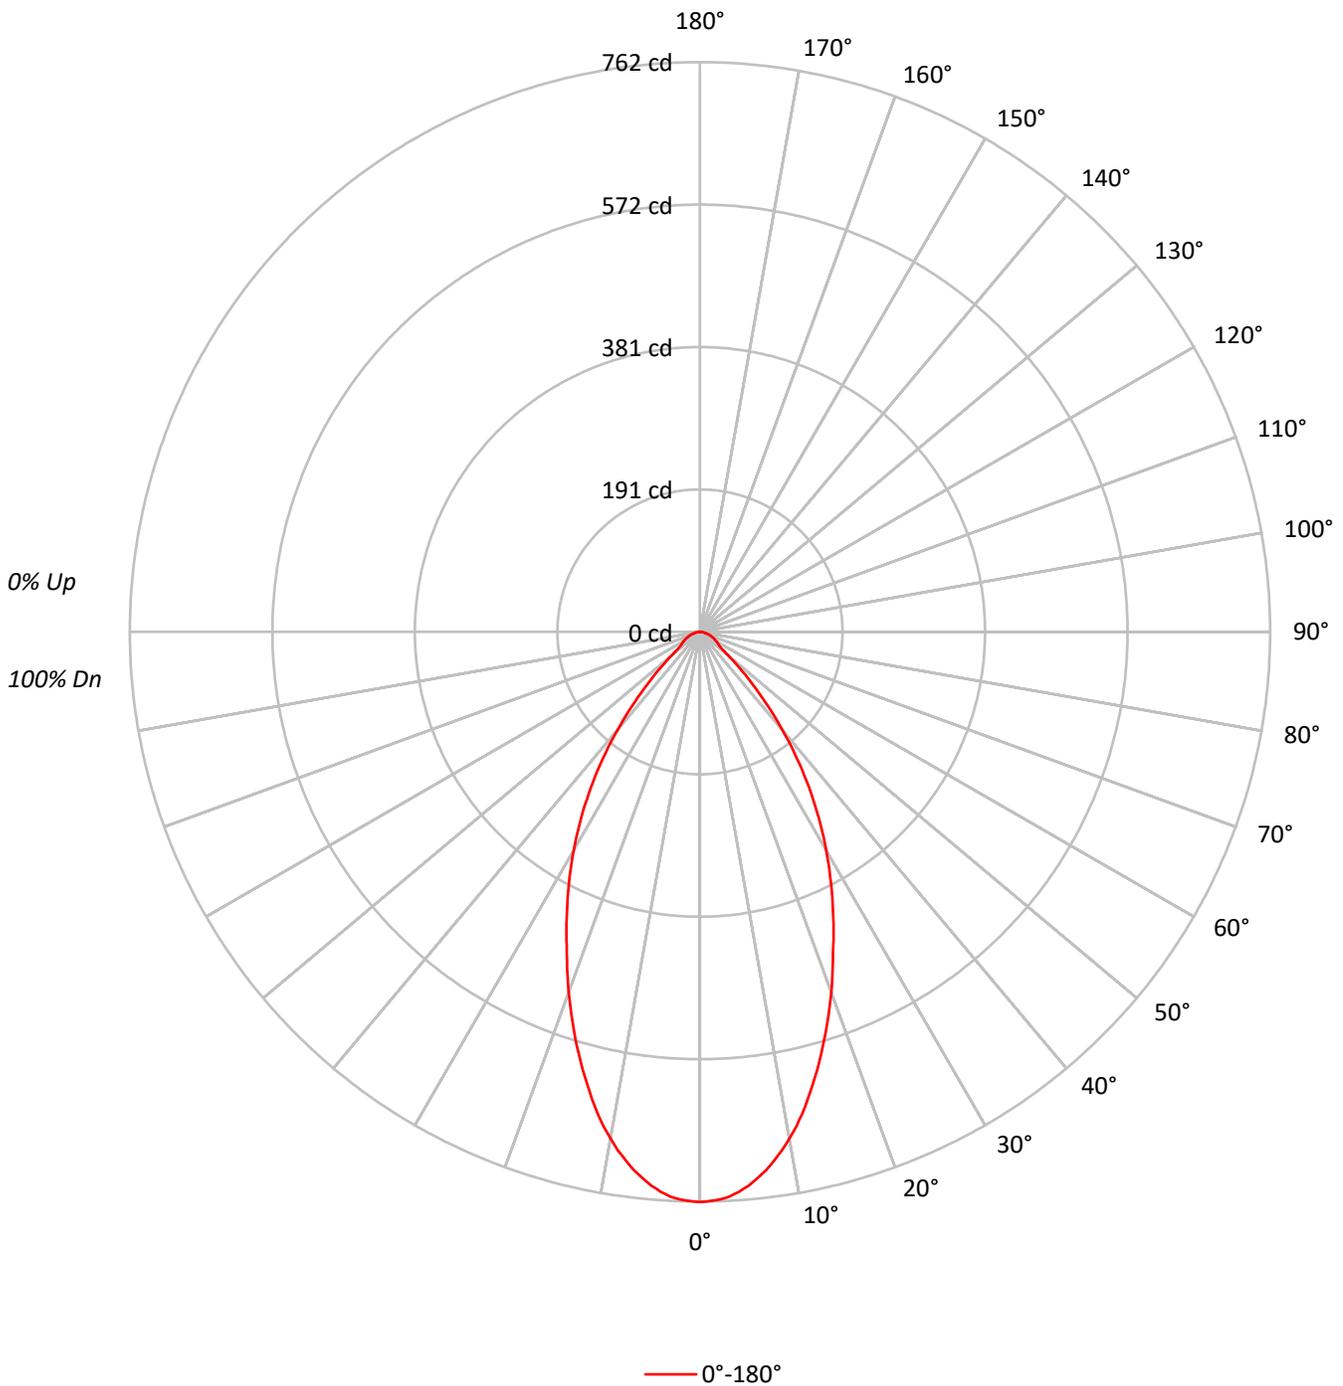



TEST NUMBER: P1267474
 CATALOG NUMBER: P3A13R359735DE010 E3DLD1H

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20				20	
RC	80				70				50				30				10				0	
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0	
RCR																						
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100				100
1	112	109	106	104	110	107	104	102	103	101	99	99	98	96	96	94	93	91				91
2	106	100	96	92	104	98	94	91	95	92	89	92	89	87	89	87	85	83				83
3	100	92	87	82	98	91	86	81	88	84	80	86	82	79	83	80	78	76				76
4	94	85	79	74	92	84	78	74	82	77	73	80	75	72	78	74	71	69				69
5	89	79	73	68	87	78	72	67	76	71	67	75	70	66	73	69	66	64				64
6	84	74	67	62	82	73	67	62	71	66	61	70	65	61	68	64	61	59				59
7	79	69	62	57	78	68	62	57	67	61	57	65	60	57	64	60	56	55				55
8	75	64	58	53	74	64	57	53	63	57	53	62	56	53	61	56	52	51				51
9	71	60	54	50	70	60	54	50	59	53	49	58	53	49	57	52	49	48				48
10	67	57	51	46	66	56	50	46	56	50	46	55	50	46	54	49	46	45				45

AVERAGE LUMINANCE (cd/sqm):

	0°
0°	167202
5°	163658
10°	153282
15°	137594
20°	119687
25°	101982
30°	85431
35°	68047
40°	49206
45°	31135
50°	16989
55°	11775
60°	11096
65°	10325
70°	9873
75°	8472
80°	7956
85°	6793

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 0°
 Vertical Angle: 45°
 Luminance: 31135 cd/sqm



TEST NUMBER: P1267474
 CATALOG NUMBER: P3A13R359735DE010 E3DLD1H

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	69.2	9.5
10°-20°	168.7	23.0
20°-30°	193.3	26.4
30°-40°	157.7	21.5
40°-50°	79.5	10.9
50°-60°	29.5	4.0
60°-70°	19.8	2.7
70°-80°	11.0	1.5
80°-90°	3.3	0.5
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	431.1	58.9
0°-40°	588.8	80.4
0°-60°	697.9	95.3
0°-90°	732.0	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	732.0	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	762	
5°	744	69
15°	606	169
25°	422	193
35°	254	158
45°	100	80
55°	31	30
65°	20	20
75°	10	11
85°	3	3
90°	0	



TEST NUMBER: P1267474
CATALOG NUMBER: P3A13R359735DE010 E3DLD1H

CANDELA DISTRIBUTION (FULL):

0°	
0°	762.5
1°	761.6
2°	759.8
3°	756.2
4°	750.8
5°	743.5
6°	734.5
7°	725.5
8°	713.7
9°	701.9
10°	688.4
11°	673.9
12°	658.5
13°	641.3
14°	623.2
15°	606.1
17.5°	559.9
20°	512.9
22.5°	464.9
25°	421.5
27.5°	379.0
30°	337.4
32.5°	295.8
35°	254.2
37.5°	212.6
40°	171.9
42.5°	133.9
45°	100.4
47.5°	72.4
50°	49.8
52.5°	36.2
55°	30.8
57.5°	28.0
60°	25.3
62.5°	22.6
65°	19.9
67.5°	17.2
70°	15.4
72.5°	12.7
75°	10.0
77.5°	8.1
80°	6.3
82.5°	4.5
85°	2.7
87.5°	1.8



TEST NUMBER: P1267474
CATALOG NUMBER: P3A13R359735DE010 E3DLD1H

CANDELA DISTRIBUTION (continued):

0°
90° | 0.0

(END OF REPORT)