

Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for
Cooper Lighting Solutions

Brand: IRiS

Report Number: P1267730

Luminaire Tested: P3A17R209735DE010 E3DL1WMH

Issue Date: 1/30/2026

Test Information

Test Method: LM-79-2019
Report Number: P1267730
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2601-647-7)
Test Lab: INNOVATION CENTER
Issue Date: 1/30/2026
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: IRiS
Catalog Number: P3A17R209735DE010 E3DL1WMH
Description: 3in Adjustable LED luminaire with, R20 optic, 3500K CCT AND, 97CRI , E3DL1WMH TRIM
Light Source: -
Ballast/Driver: -

Summary


Lumens per Lamp: N/A
Luminaire Lumens: 1241.0 lumens
Efficiency: N/A
Efficacy: 58.5 lumens/watt
Spacing Criteria (0/90/45): 0.44 / 0.44 / 0.46
Luminous Opening: Circular (Dia: 0.25' x H: 0')
CIE Type: Direct

Input Watts (W): 21.2
Input Voltage (V): NR
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT

TEST NUMBER: P1267730

CATALOG NUMBER: P3A17R209735DE010 E3DL1WMH

Luminous Intensity Polar Plot

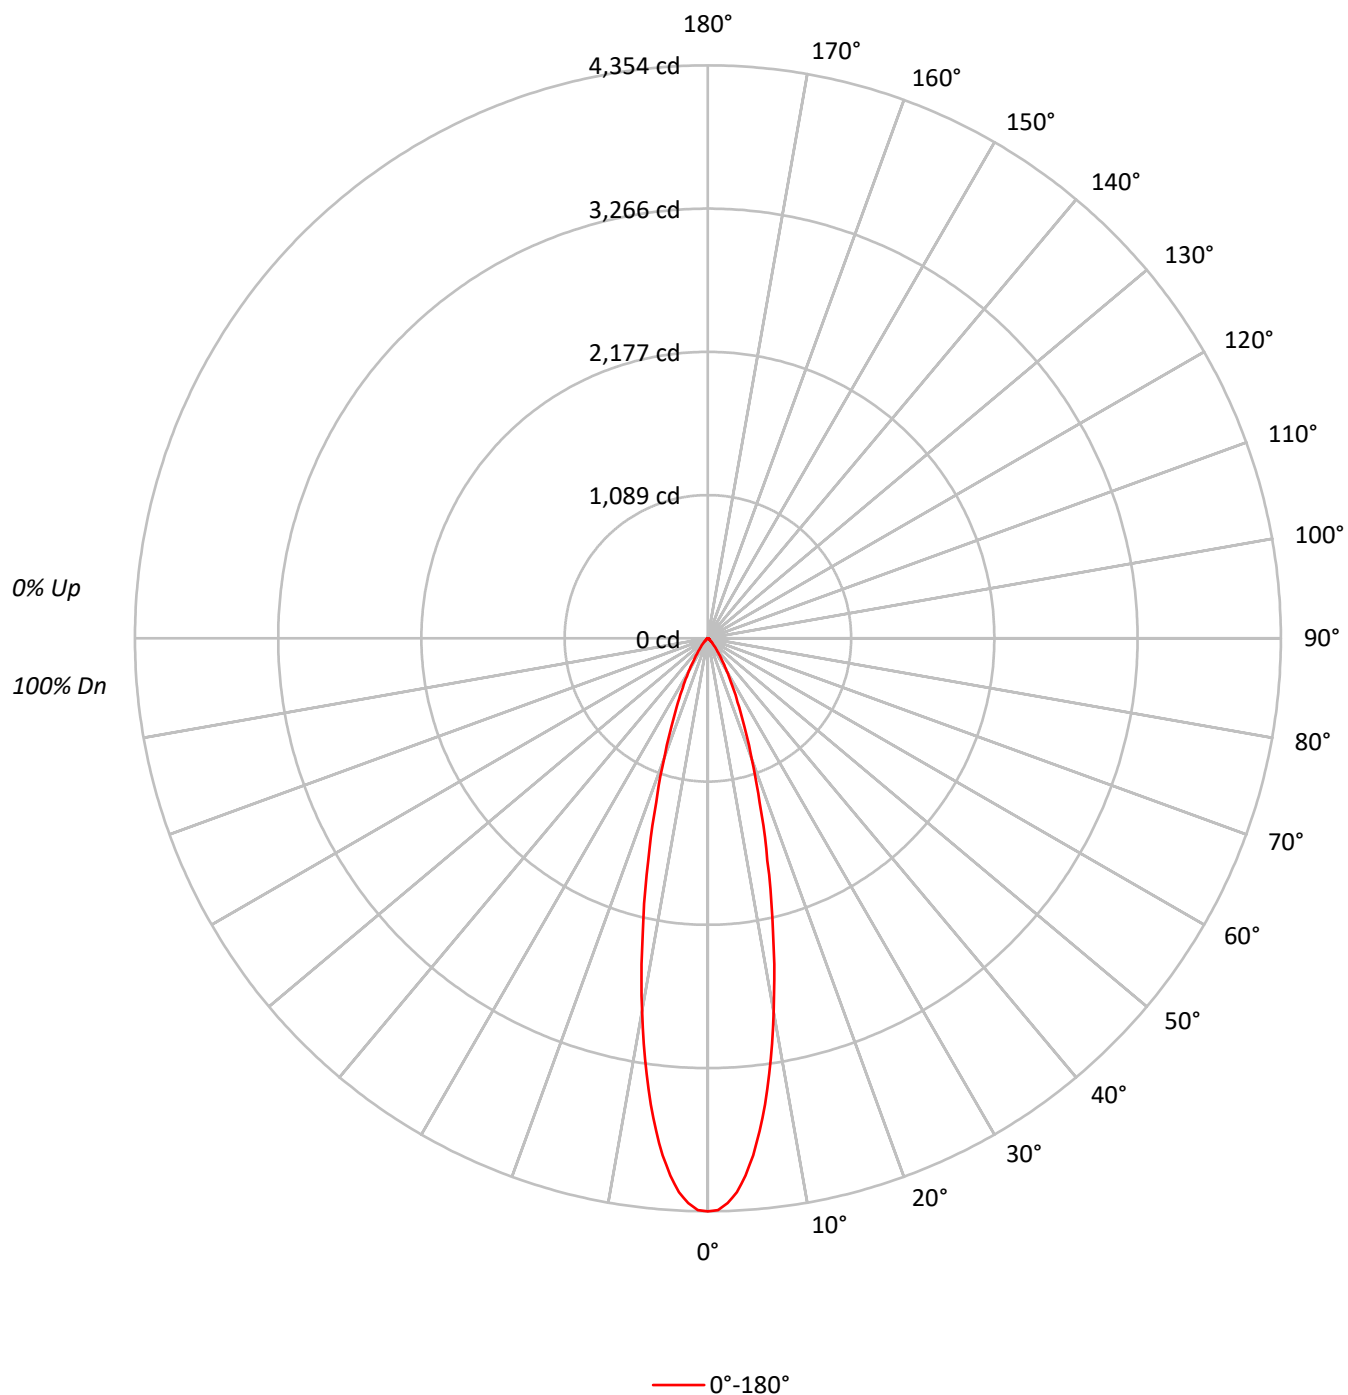

TEST NUMBER: P1267730

CATALOG NUMBER: P3A17R209735DE010 E3DL1WMH

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20					20					20					20
RC	80				70					50					30					10
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10
RCR																				
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100		
1	114	112	110	108	112	110	108	106	106	104	103	102	101	100	99	98	97	95		
2	110	106	102	100	108	104	101	98	101	98	96	98	96	94	95	94	92	91		
3	106	100	96	93	104	99	95	92	97	93	91	94	92	89	92	90	88	87		
4	102	96	91	88	100	95	90	87	92	89	86	91	88	85	89	86	84	83		
5	98	91	87	83	97	90	86	83	89	85	82	87	84	81	86	83	81	79		
6	95	87	83	79	93	87	82	79	85	81	78	84	81	78	83	80	77	76		
7	91	84	79	76	90	83	79	76	82	78	75	81	78	75	80	77	75	73		
8	88	81	76	73	87	80	76	73	79	75	72	78	75	72	78	74	72	71		
9	85	78	73	70	85	77	73	70	77	73	70	76	72	69	75	72	69	68		
10	83	75	71	68	82	75	70	67	74	70	67	73	70	67	73	69	67	66		

AVERAGE LUMINANCE (cd/sqm):

	0°
0°	954814
5°	867948
10°	641471
15°	396801
20°	226610
25°	129370
30°	72543
35°	39485
40°	21612
45°	11908
50°	6959
55°	5046
60°	4736
65°	4358
70°	3847
75°	4067
80°	3031
85°	3019

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 0°

Vertical Angle: 45°

Luminance: 11908 cd/sqm

TEST NUMBER: P1267730

CATALOG NUMBER: P3A17R209735DE010 E3DL1WMH

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	341.4	27.5
10°-20°	487.4	39.3
20°-30°	254.4	20.5
30°-40°	98.4	7.9
40°-50°	31.9	2.6
50°-60°	12.6	1.0
60°-70°	8.3	0.7
70°-80°	4.9	0.4
80°-90°	1.6	0.1
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	1083.3	87.3
0°-40°	1181.7	95.2
0°-60°	1226.2	98.8
0°-90°	1241.0	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	1241.0	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	4354	
5°	3943	341
15°	1748	487
25°	535	254
35°	148	98
45°	38	32
55°	13	13
65°	8	8
75°	5	5
85°	1	2
90°	0	

TEST NUMBER: P1267730

CATALOG NUMBER: P3A17R209735DE010 E3DL1WMH

CANDELA DISTRIBUTION (FULL):

0°	
0°	4354.3
1°	4345.9
2°	4294.3
3°	4215.2
4°	4092.9
5°	3943.1
6°	3765.6
7°	3569.0
8°	3341.2
9°	3119.4
10°	2880.9
12.5°	2289.8
15°	1747.9
17.5°	1308.0
20°	971.1
22.5°	719.3
25°	534.7
27.5°	394.4
30°	286.5
32.5°	207.4
35°	147.5
37.5°	106.7
40°	75.5
42.5°	53.9
45°	38.4
47.5°	27.6
50°	20.4
52.5°	15.6
55°	13.2
57.5°	12.0
60°	10.8
62.5°	9.6
65°	8.4
67.5°	7.2
70°	6.0
72.5°	6.0
75°	4.8
77.5°	3.6
80°	2.4
82.5°	2.4
85°	1.2
87.5°	1.2
90°	0.0

(END OF REPORT)