

Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for
Cooper Lighting Solutions

Brand: IRiS

Report Number: P1267748

Luminaire Tested: P3A17R259735DE010 E3D1LI

Issue Date: 1/29/2026

Test Information

Test Method: LM-79-2019
Report Number: P1267748
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2501-338-9)
Test Lab: INNOVATION CENTER
Issue Date: 1/29/2026
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: IRiS
Catalog Number: P3A17R259735DE010 E3D1LI
Description: 3in Adjustable LED luminaire with, R25 optic, 3500K CCT AND, 97CRI , E3D1LI TRIM
Light Source: -
Ballast/Driver: -

Summary


Lumens per Lamp: N/A
Luminaire Lumens: 1621.0 lumens
Efficiency: N/A
Efficacy: 76.5 lumens/watt
Spacing Criteria (0/90/45): 0.44 / 0.44 / 0.4
Luminous Opening: Circular (Dia: 0.25' x H: 0')
CIE Type: Direct

Input Watts (W): 21.2
Input Voltage (V): NR
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT

TEST NUMBER: P1267748

CATALOG NUMBER: P3A17R259735DE010 E3D1LI

Luminous Intensity Polar Plot

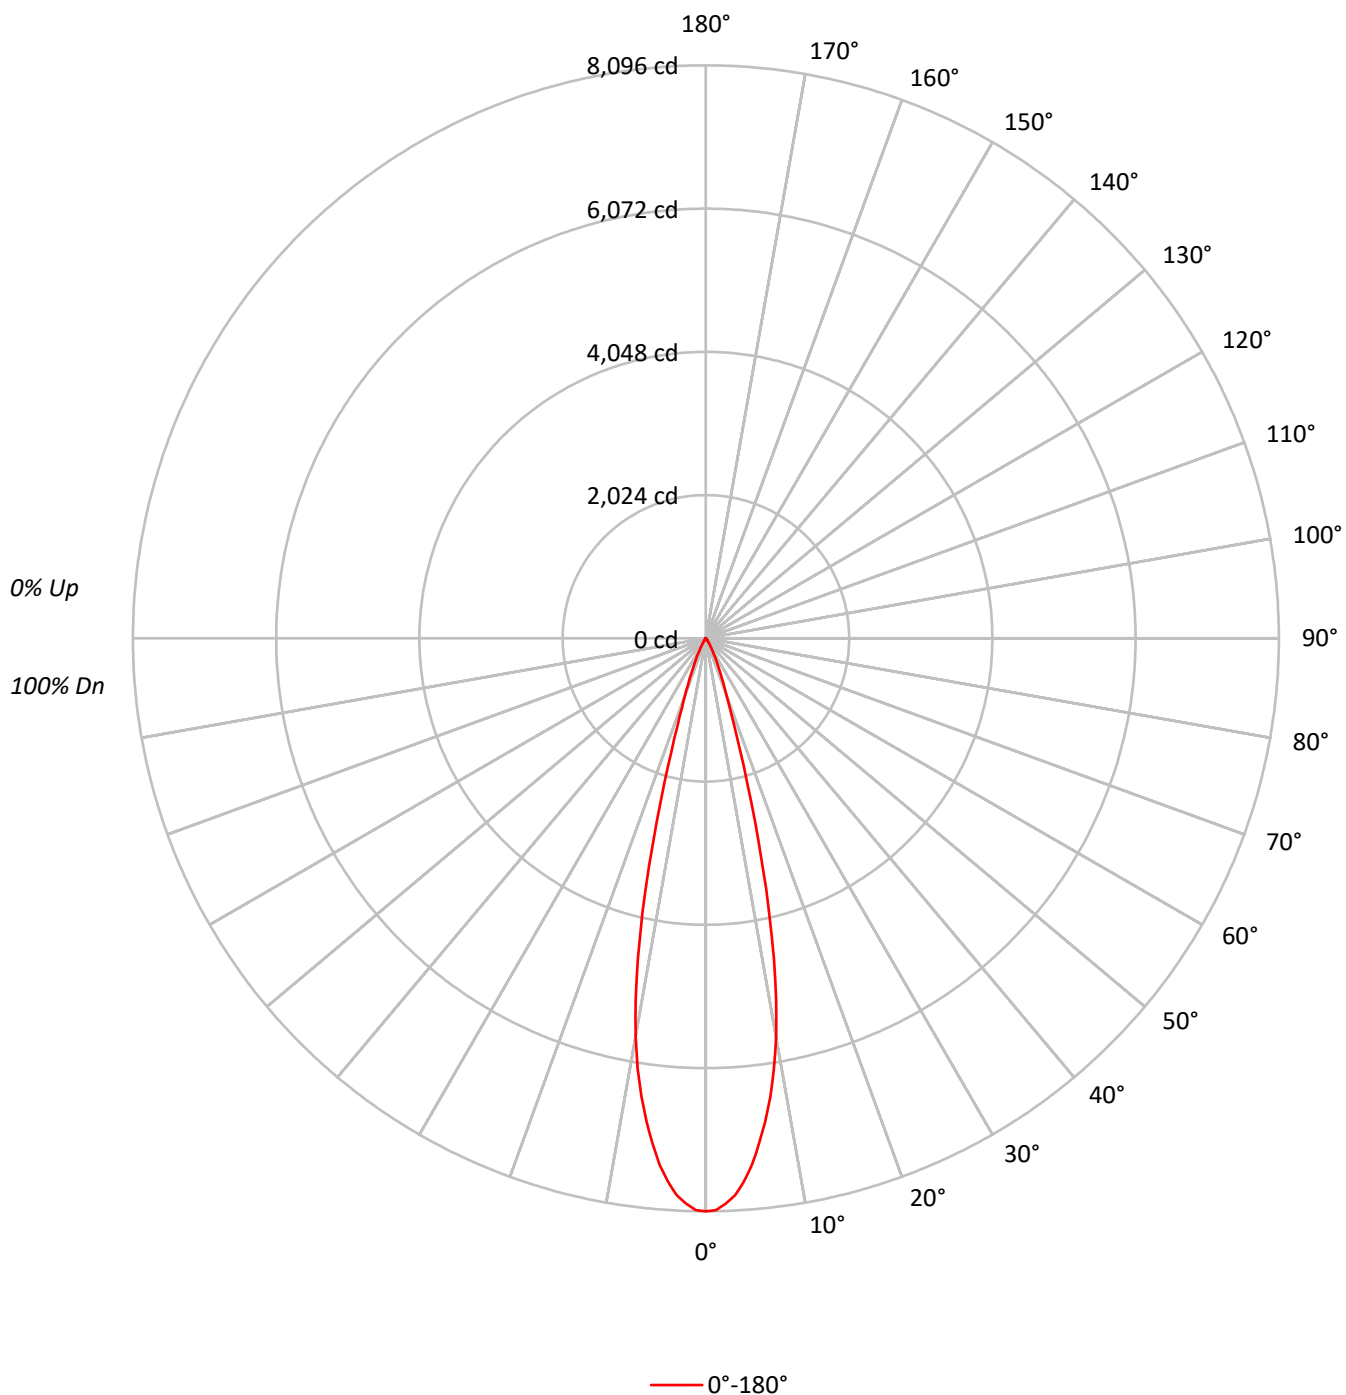

TEST NUMBER: P1267748

CATALOG NUMBER: P3A17R259735DE010 E3D1LI

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20					20					20					20					20
RC	80					70					50					30					10
RW	70	50	30	10		70	50	30	10		50	30	10		50	30	10		50	30	10
RCR																					
0	119	119	119	119		116	116	116	116		111	111	111		106	106	106		102	102	102
1	115	113	111	110		113	111	110	108		107	106	105		104	103	102		100	99	99
2	112	108	106	103		110	107	104	102		104	102	100		101	99	98		98	97	96
3	109	104	101	98		107	103	100	97		100	98	96		98	96	94		96	94	93
4	106	101	97	94		104	100	96	94		98	95	92		96	93	91		94	92	90
5	103	97	93	91		101	96	93	90		95	92	90		93	91	89		92	90	88
6	100	94	90	88		99	94	90	87		92	89	87		91	88	86		90	88	86
7	98	92	88	85		97	91	87	85		90	87	84		89	86	84		88	86	84
8	95	89	85	83		94	89	85	83		88	85	82		87	84	82		86	84	82
9	93	87	83	81		92	86	83	80		86	83	80		85	82	80		84	82	80
10	91	85	81	79		90	84	81	79		84	81	78		83	80	78		83	80	78

AVERAGE LUMINANCE (cd/sqm):

	0°
0°	1775296
5°	1644548
10°	1272410
15°	607745
20°	200381
25°	84465
30°	32739
35°	14161
40°	4723
45°	2202
50°	819
55°	459
60°	263
65°	311
70°	0
75°	0
80°	0
85°	0

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 0°

Vertical Angle: 45°

Luminance: 2202 cd/sqm

TEST NUMBER: P1267748

CATALOG NUMBER: P3A17R259735DE010 E3D1LI

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	656.7	40.5
10°-20°	746.9	46.1
20°-30°	173.6	10.7
30°-40°	36.4	2.2
40°-50°	5.9	0.4
50°-60°	1.0	0.1
60°-70°	0.5	0.0
70°-80°	0.0	0.0
80°-90°	0.0	0.0
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	1577.2	97.3
0°-40°	1613.6	99.5
0°-60°	1620.5	100.0
0°-90°	1621.0	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	1621.0	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	8096	
5°	7471	657
15°	2677	747
25°	349	174
35°	53	36
45°	7	6
55°	1	1
65°	1	1
75°	0	0
85°	0	0
90°	0	

TEST NUMBER: P1267748

CATALOG NUMBER: P3A17R259735DE010 E3D1LI

CANDELA DISTRIBUTION (FULL):

0°	
0°	8096.0
1°	8079.5
2°	7995.5
3°	7877.4
4°	7696.9
5°	7471.2
6°	7181.5
7°	6878.2
8°	6537.9
9°	6154.1
10°	5714.5
11°	5205.0
12°	4620.2
13°	3979.5
14°	3309.5
15°	2677.1
16°	2117.6
17°	1649.8
18°	1297.7
19°	1037.9
20°	858.7
21°	717.6
22°	602.4
23°	503.1
24°	420.8
25°	349.1
27.5°	206.9
30°	129.3
32.5°	82.9
35°	52.9
37.5°	31.7
40°	16.5
42.5°	10.6
45°	7.1
47.5°	4.1
50°	2.4
52.5°	1.2
55°	1.2
57.5°	0.6
60°	0.6
62.5°	0.6
65°	0.6
67.5°	0.6
70°	0.0
72.5°	0.0



TEST NUMBER: P1267748
CATALOG NUMBER: P3A17R259735DE010 E3D1LI

CANDELA DISTRIBUTION (continued):

	0°
75°	0.0
77.5°	0.0
80°	0.0
82.5°	0.0
85°	0.0
87.5°	0.0
90°	0.0

(END OF REPORT)