

Scaled data based on original data using  
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-  
State Lighting Products

Test Report Prepared for  
Cooper Lighting Solutions

Brand: IRiS

Report Number: P1267943

Luminaire Tested: P3A17R559735DE010 E3DLP1WH

Issue Date: 1/30/2026

**Test Information**

Test Method: LM-79-2019  
Report Number: P1267943  
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2601-647-35)  
Test Lab: INNOVATION CENTER  
Issue Date: 1/30/2026  
Manufacturer: COOPER LIGHTING SOLUTIONS  
Product Line: IRiS  
Catalog Number: P3A17R559735DE010 E3DLP1WH  
Description: 3in Adjustable LED luminaire with, R55 optic, 3500K CCT AND, 97CRI , E3DLP1WH TRIM  
Light Source: -  
Ballast/Driver: -

**Summary**


Lumens per Lamp: N/A  
Luminaire Lumens: 1307.0 lumens  
Efficiency: N/A  
Efficacy: 61.7 lumens/watt  
Spacing Criteria (0/90/45): 0.83 / 0.83 / 0.81  
Luminous Opening: Circular (Dia: 0.25' x H: 0')  
CIE Type: Direct

Input Watts (W): 21.2  
Input Voltage (V): NR  
Input Current (Ain): NR  
Voltage Rise (V): NR  
Power Factor: NR  
Total Harmonic Distortion (THDi): NR  
Frequency (hertz): 60  
Stabilization Time: NR  
Operation Time: NR  
Ambient Temperature (°C): NR  
Test Distance: 24 FT

TEST NUMBER: P1267943

CATALOG NUMBER: P3A17R559735DE010 E3DLP1WH

### Luminous Intensity Polar Plot

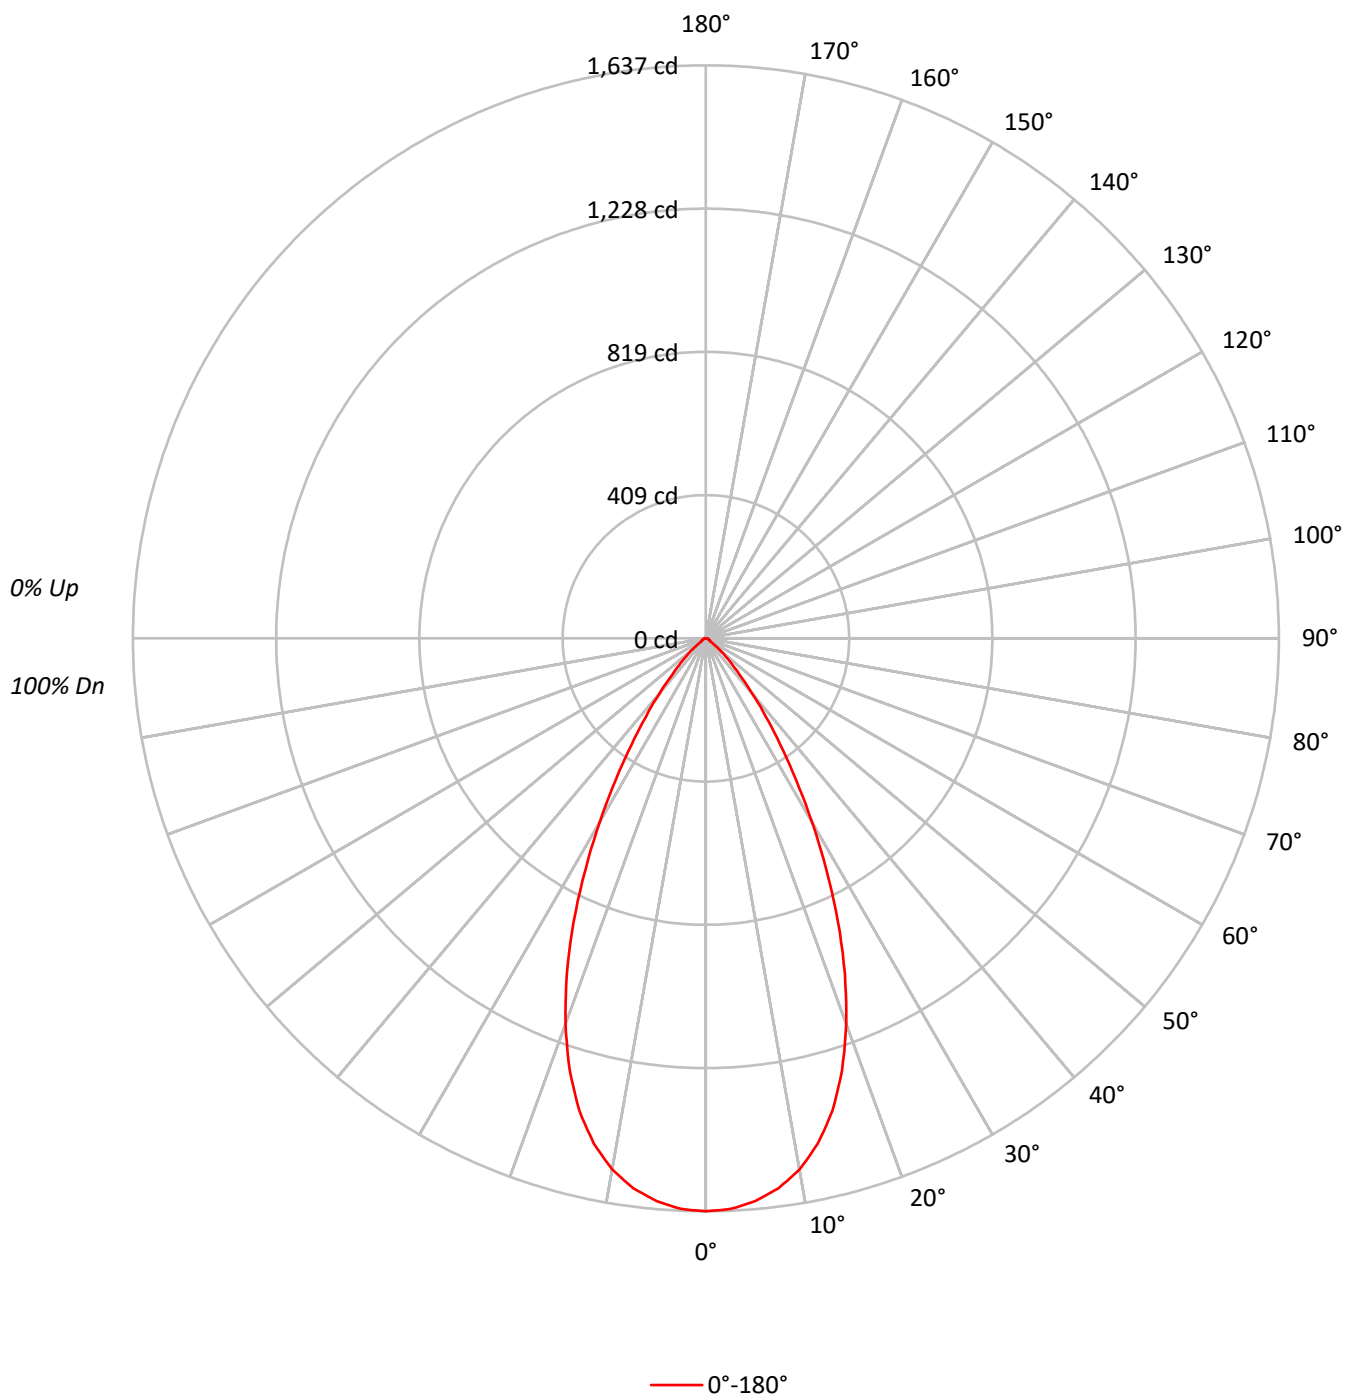

TEST NUMBER: P1267943

CATALOG NUMBER: P3A17R559735DE010 E3DLP1WH

**COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:**

|     |     |     |     |     |     |     |     |     |     |     |     |  |     |     |     |  |     |
|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|--|-----|-----|-----|--|-----|
| RF  | 20  |     |     |     | 20  |     |     |     | 20  |     |     |  | 20  |     |     |  | 20  |
| RC  | 80  |     |     |     | 70  |     |     |     | 50  |     |     |  | 30  |     |     |  | 10  |
| RW  | 70  | 50  | 30  | 10  | 70  | 50  | 30  | 10  | 50  | 30  | 10  |  | 50  | 30  | 10  |  | 50  |
| RCR |     |     |     |     |     |     |     |     |     |     |     |  |     |     |     |  |     |
| 0   | 119 | 119 | 119 | 119 | 116 | 116 | 116 | 116 | 111 | 111 | 111 |  | 106 | 106 | 106 |  | 102 |
| 1   | 113 | 111 | 108 | 106 | 111 | 108 | 106 | 104 | 104 | 103 | 101 |  | 101 | 99  | 98  |  | 97  |
| 2   | 108 | 103 | 99  | 95  | 106 | 101 | 97  | 94  | 98  | 95  | 92  |  | 95  | 92  | 90  |  | 92  |
| 3   | 102 | 96  | 91  | 87  | 100 | 94  | 90  | 86  | 92  | 88  | 85  |  | 89  | 86  | 83  |  | 87  |
| 4   | 97  | 90  | 84  | 80  | 95  | 89  | 83  | 79  | 86  | 82  | 78  |  | 84  | 81  | 78  |  | 82  |
| 5   | 92  | 84  | 78  | 74  | 91  | 83  | 78  | 74  | 81  | 77  | 73  |  | 80  | 76  | 72  |  | 78  |
| 6   | 88  | 79  | 73  | 69  | 86  | 78  | 73  | 68  | 77  | 72  | 68  |  | 75  | 71  | 68  |  | 74  |
| 7   | 84  | 74  | 68  | 64  | 82  | 74  | 68  | 64  | 72  | 67  | 64  |  | 71  | 67  | 63  |  | 70  |
| 8   | 80  | 70  | 64  | 60  | 78  | 70  | 64  | 60  | 69  | 63  | 60  |  | 67  | 63  | 60  |  | 67  |
| 9   | 76  | 66  | 61  | 57  | 75  | 66  | 60  | 56  | 65  | 60  | 56  |  | 64  | 59  | 56  |  | 63  |
| 10  | 73  | 63  | 57  | 53  | 72  | 62  | 57  | 53  | 62  | 57  | 53  |  | 61  | 56  | 53  |  | 60  |

**AVERAGE LUMINANCE (cd/sqm):**

|     |        |
|-----|--------|
|     | 0°     |
| 0°  | 358897 |
| 5°  | 355249 |
| 10° | 343080 |
| 15° | 317119 |
| 20° | 273654 |
| 25° | 216133 |
| 30° | 153315 |
| 35° | 98859  |
| 40° | 59368  |
| 45° | 33461  |
| 50° | 18012  |
| 55° | 6423   |
| 60° | 5789   |
| 65° | 5604   |
| 70° | 5386   |
| 75° | 5083   |
| 80° | 4546   |
| 85° | 3019   |

**MAXIMUM LUMINANCE 45°-90°:**

Horizontal Angle: 0°

Vertical Angle: 45°

Luminance: 33461 cd/sqm

TEST NUMBER: P1267943

CATALOG NUMBER: P3A17R559735DE010 E3DLP1WH

**ZONAL LUMENS:**

| Zone      | Lumens | % Fixture |
|-----------|--------|-----------|
| 0°-10°    | 151.8  | 11.6      |
| 10°-20°   | 386.3  | 29.6      |
| 20°-30°   | 404.8  | 31.0      |
| 30°-40°   | 236.2  | 18.1      |
| 40°-50°   | 88.4   | 6.8       |
| 50°-60°   | 20.8   | 1.6       |
| 60°-70°   | 10.7   | 0.8       |
| 70°-80°   | 6.3    | 0.5       |
| 80°-90°   | 1.8    | 0.1       |
| 90°-100°  | 0.0    | 0.0       |
| 100°-110° | 0.0    | 0.0       |
| 110°-120° | 0.0    | 0.0       |
| 120°-130° | 0.0    | 0.0       |
| 130°-140° | 0.0    | 0.0       |
| 140°-150° | 0.0    | 0.0       |
| 150°-160° | 0.0    | 0.0       |
| 160°-170° | 0.0    | 0.0       |
| 170°-180° | 0.0    | 0.0       |
| 0°-30°    | 942.9  | 72.1      |
| 0°-40°    | 1179.0 | 90.2      |
| 0°-60°    | 1288.2 | 98.6      |
| 0°-90°    | 1307.0 | 100.0     |
| 90°-120°  | 0.0    | 0.0       |
| 90°-150°  | 0.0    | 0.0       |
| 90°-180°  | 0.0    | 0.0       |
| 0°-180°   | 1307.0 | 100.0     |

**CANDELA DISTRIBUTION:**

|     | 0°   | Flux |
|-----|------|------|
| 0°  | 1637 |      |
| 5°  | 1614 | 152  |
| 15° | 1397 | 386  |
| 25° | 893  | 405  |
| 35° | 369  | 236  |
| 45° | 108  | 88   |
| 55° | 17   | 21   |
| 65° | 11   | 11   |
| 75° | 6    | 6    |
| 85° | 1    | 2    |
| 90° | 0    |      |

TEST NUMBER: P1267943

CATALOG NUMBER: P3A17R559735DE010 E3DLP1WH

**CANDELA DISTRIBUTION (FULL):**

| 0°    |        |
|-------|--------|
| 0°    | 1636.7 |
| 2.5°  | 1631.9 |
| 5°    | 1613.9 |
| 7.5°  | 1585.1 |
| 10°   | 1540.8 |
| 12.5° | 1478.4 |
| 15°   | 1396.9 |
| 17.5° | 1293.8 |
| 20°   | 1172.7 |
| 22.5° | 1037.2 |
| 25°   | 893.3  |
| 27.5° | 745.8  |
| 30°   | 605.5  |
| 32.5° | 478.4  |
| 35°   | 369.3  |
| 37.5° | 280.6  |
| 40°   | 207.4  |
| 42.5° | 148.7  |
| 45°   | 107.9  |
| 47.5° | 77.9   |
| 50°   | 52.8   |
| 52.5° | 30.0   |
| 55°   | 16.8   |
| 57.5° | 14.4   |
| 60°   | 13.2   |
| 62.5° | 12.0   |
| 65°   | 10.8   |
| 67.5° | 9.6    |
| 70°   | 8.4    |
| 72.5° | 7.2    |
| 75°   | 6.0    |
| 77.5° | 4.8    |
| 80°   | 3.6    |
| 82.5° | 2.4    |
| 85°   | 1.2    |
| 87.5° | 1.2    |
| 90°   | 0.0    |

(END OF REPORT)