

Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for
Cooper Lighting Solutions

Brand: IRiS

Report Number: P1268123

Luminaire Tested: P3A20R259735D010 E3CD1MMS

Issue Date: 1/30/2026

Test Information

Test Method: LM-79-2019
Report Number: P1268123
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2601-647-12)
Test Lab: INNOVATION CENTER
Issue Date: 1/30/2026
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: IRiS
Catalog Number: P3A20R259735D010 E3CD1MMS
Description: 3in Adjustable LED luminaire with, R25 optic, 3500K CCT AND, 97CRI , E3CD1MMS TRIM
Light Source: -
Ballast/Driver: -

Summary


Lumens per Lamp: N/A
Luminaire Lumens: 2003.9 lumens
Efficiency: N/A
Efficacy: 69.6 lumens/watt
Spacing Criteria (0/90/45): 0.45 / 0.45 / 0.41
Luminous Opening: Circular (Dia: 0.25' x H: 0')
CIE Type: Direct

Input Watts (W): 28.8
Input Voltage (V): NR
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT

TEST NUMBER: P1268123

CATALOG NUMBER: P3A20R259735D010 E3CD1MMS

Luminous Intensity Polar Plot

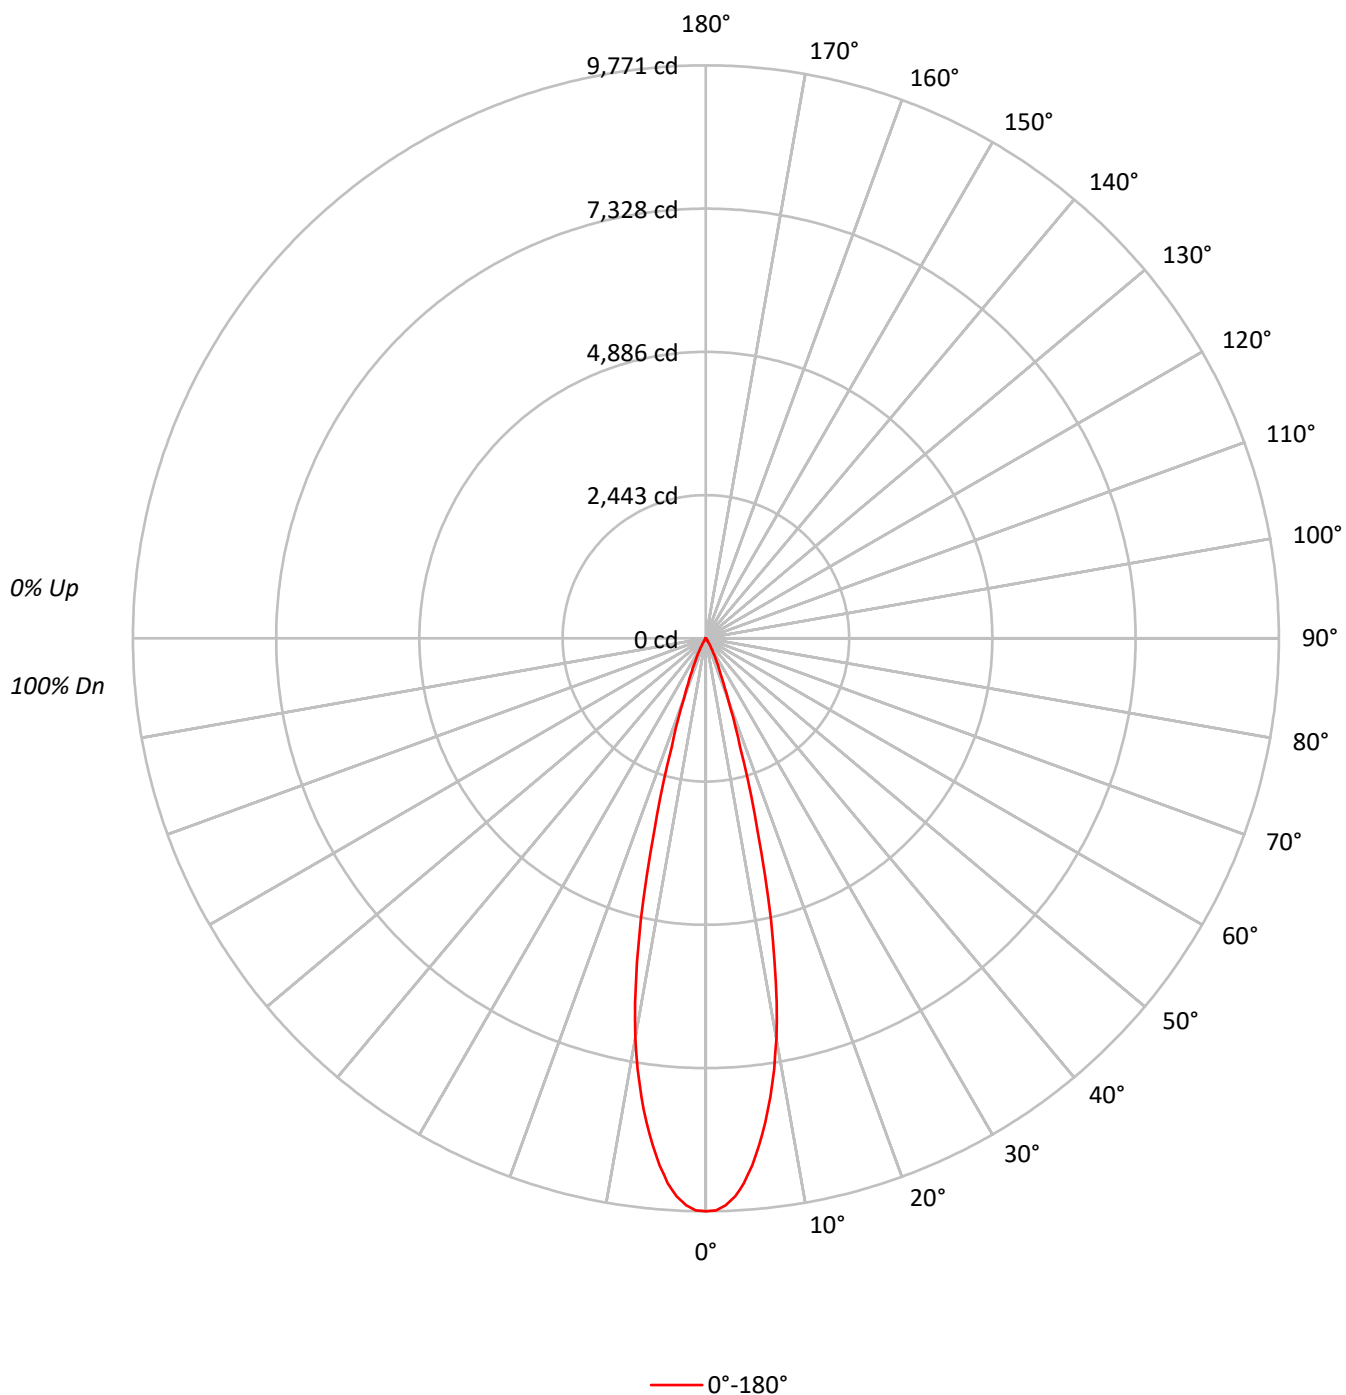

TEST NUMBER: P1268123

CATALOG NUMBER: P3A20R259735D010 E3CD1MMS

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20					20					20					20					20
RC	80					70					30					10					0
RW	70	50	30	10		70	50	30	10		50	30	10		50	30	10		50	30	10
RCR																					
0	119	119	119	119		116	116	116	116		111	111	111		106	106	106		102	102	102
1	115	113	111	110		113	111	109	108		107	106	105		103	103	102		100	99	99
2	112	108	105	103		110	107	104	102		104	102	100		101	99	98		98	97	96
3	108	104	101	98		107	103	100	97		100	98	96		98	96	94		96	94	93
4	105	100	97	94		104	99	96	93		97	95	92		96	93	91		94	92	90
5	103	97	93	90		101	96	93	90		95	92	89		93	91	89		92	90	88
6	100	94	90	87		99	93	90	87		92	89	87		91	88	86		90	87	86
7	97	91	88	85		96	91	87	85		90	87	84		89	86	84		88	85	83
8	95	89	85	83		94	89	85	82		88	84	82		87	84	82		86	83	81
9	93	87	83	80		92	86	83	80		86	82	80		85	82	80		84	82	80
10	91	85	81	78		90	84	81	78		84	80	78		83	80	78		82	80	78

AVERAGE LUMINANCE (cd/sqm):

	0°
0°	2142570
5°	1987184
10°	1541098
15°	772740
20°	253865
25°	100941
30°	37879
35°	10949
40°	4952
45°	1954
50°	1603
55°	1185
60°	1360
65°	1608
70°	1026
75°	1356
80°	2020
85°	0

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 0°
Vertical Angle: 80°
Luminance: 2020 cd/sqm

TEST NUMBER: P1268123

CATALOG NUMBER: P3A20R259735D010 E3CD1MMS

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	794.1	39.6
10°-20°	947.3	47.3
20°-30°	213.6	10.7
30°-40°	34.6	1.7
40°-50°	6.3	0.3
50°-60°	3.3	0.2
60°-70°	2.9	0.1
70°-80°	1.7	0.1
80°-90°	0.2	0.0
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	1955.0	97.6
0°-40°	1989.6	99.3
0°-60°	1999.1	99.8
0°-90°	2003.9	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	2003.9	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	9771	
5°	9028	794
15°	3404	947
25°	417	214
35°	41	35
45°	6	6
55°	3	3
65°	3	3
75°	2	2
85°	0	0
90°	0	

TEST NUMBER: P1268123

CATALOG NUMBER: P3A20R259735D010 E3CD1MMS

CANDELA DISTRIBUTION (FULL):

0°	
0°	9770.9
1°	9755.1
2°	9676.4
3°	9531.6
4°	9312.7
5°	9027.8
6°	8687.7
7°	8319.3
8°	7897.3
9°	7436.0
10°	6921.2
11°	6327.6
12°	5644.3
13°	4929.5
14°	4162.8
15°	3403.9
17.5°	1939.7
20°	1087.9
22.5°	656.5
25°	417.2
27.5°	256.6
30°	149.6
32.5°	78.7
35°	40.9
37.5°	26.8
40°	17.3
42.5°	11.0
45°	6.3
47.5°	4.7
50°	4.7
52.5°	4.7
55°	3.1
57.5°	3.1
60°	3.1
62.5°	3.1
65°	3.1
67.5°	3.1
70°	1.6
72.5°	1.6
75°	1.6
77.5°	1.6
80°	1.6
82.5°	0.0
85°	0.0
87.5°	0.0



TEST NUMBER: P1268123

CATALOG NUMBER: P3A20R259735D010 E3CD1MMS

CANDELA DISTRIBUTION (continued):



(END OF REPORT)