

Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for
Cooper Lighting Solutions

Brand: IRiS

Report Number: P1268162

Luminaire Tested: P3A20R309735D010 E3DL1GPH

Issue Date: 1/30/2026

Test Information

Test Method: LM-79-2019
Report Number: P1268162
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2601-647-15)
Test Lab: INNOVATION CENTER
Issue Date: 1/30/2026
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: IRiS
Catalog Number: P3A20R309735D010 E3DL1GPH
Description: 3in Adjustable LED luminaire with, R30 optic, 3500K CCT AND, 97CRI , E3DL1GPH TRIM
Light Source: -
Ballast/Driver: -

Summary


Lumens per Lamp: N/A
Luminaire Lumens: 817.0 lumens
Efficiency: N/A
Efficacy: 28.4 lumens/watt
Spacing Criteria (0/90/45): 0.54 / 0.54 / 0.54
Luminous Opening: Circular (Dia: 0.25' x H: 0')
CIE Type: Direct

Input Watts (W): 28.8
Input Voltage (V): NR
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT

TEST NUMBER: P1268162

CATALOG NUMBER: P3A20R309735D010 E3DL1GPH

Luminous Intensity Polar Plot

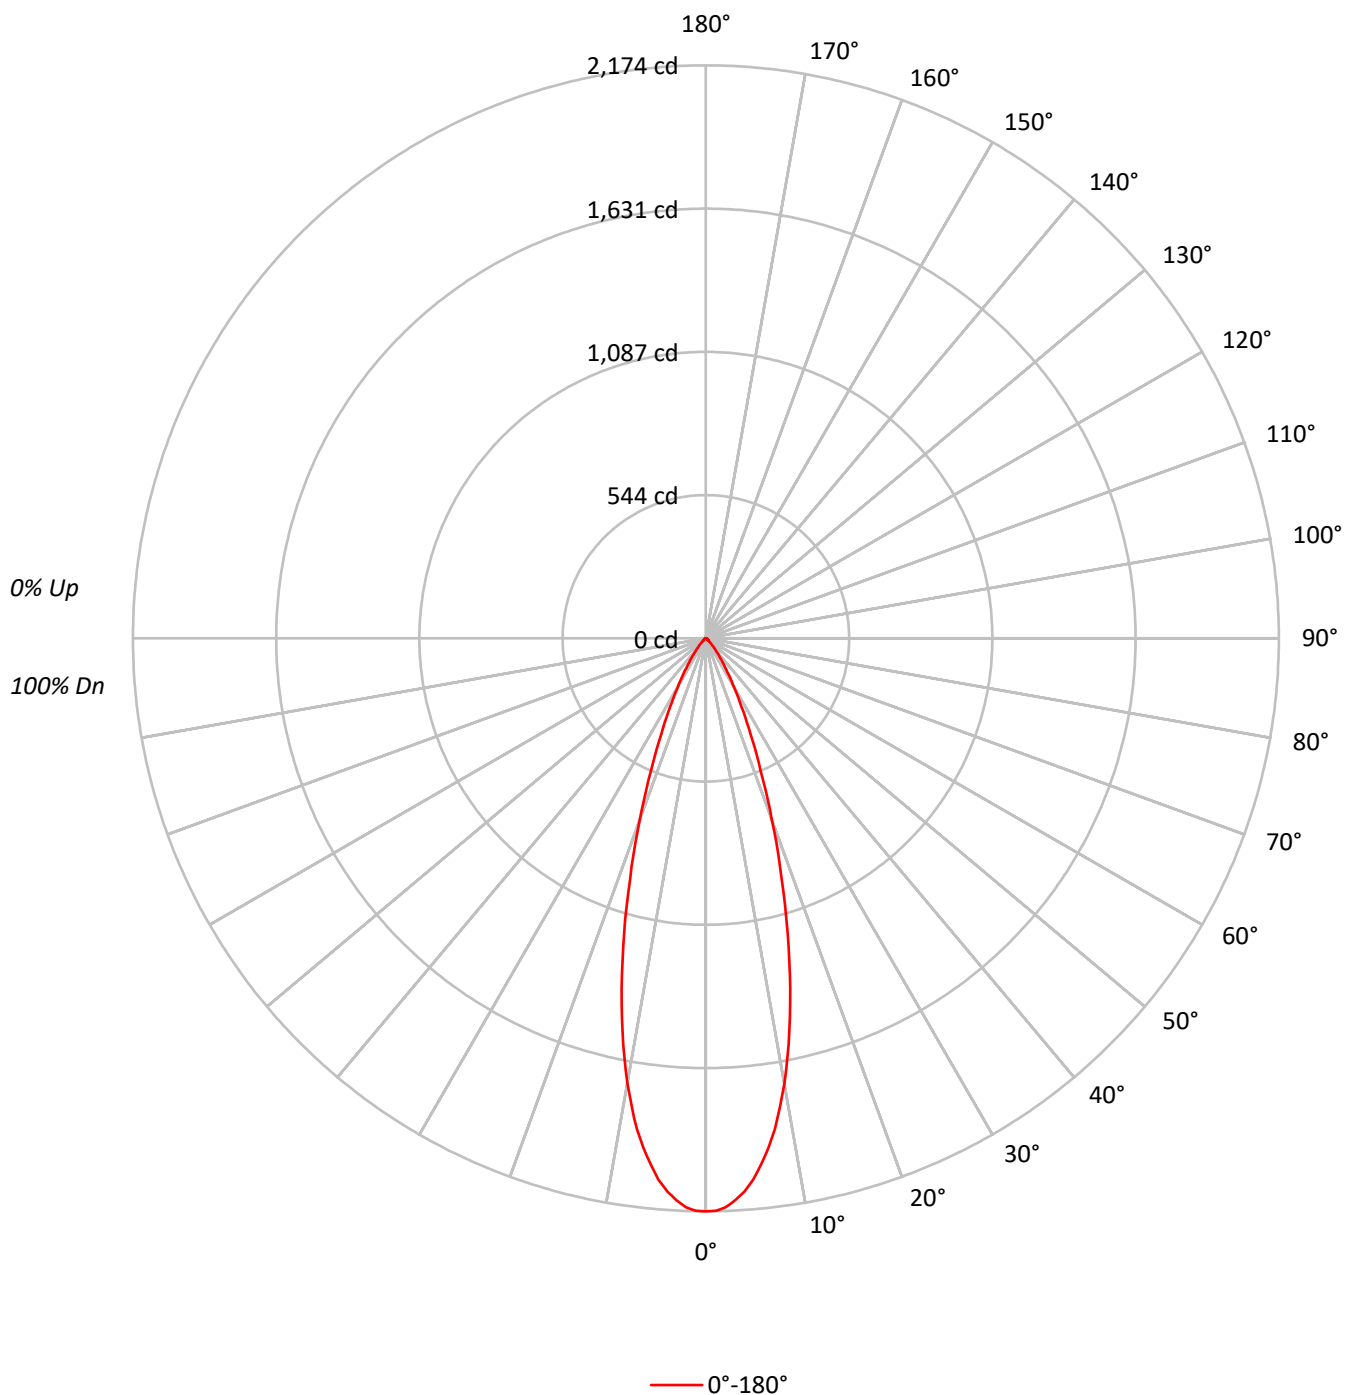

TEST NUMBER: P1268162

CATALOG NUMBER: P3A20R309735D010 E3DL1GPH

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20
RC	80				70				50				30				10
RW	70	50	30	10	70	50	30	10	50	30	10		50	30	10		50
RCR																	
0	119	119	119	119	116	116	116	116	111	111	111		106	106	106		102
1	114	112	110	108	112	110	108	106	106	104	103		102	101	100		99
2	110	105	102	99	107	104	101	98	101	98	96		98	96	94		95
3	105	100	96	92	103	98	95	91	96	93	90		94	91	89		91
4	101	95	90	87	99	94	89	86	92	88	85		90	87	84		88
5	97	90	85	82	96	89	85	81	88	84	81		86	83	80		85
6	94	86	81	78	92	85	81	77	84	80	77		83	79	76		81
7	90	82	77	74	89	82	77	74	81	76	73		80	76	73		79
8	87	79	74	71	86	79	74	71	78	73	70		77	73	70		76
9	84	76	71	68	83	75	71	68	75	70	67		74	70	67		73
10	81	73	68	65	80	73	68	65	72	68	65		71	67	65		71

AVERAGE LUMINANCE (cd/sqm):

	0°
0°	476738
5°	453752
10°	381667
15°	275257
20°	170745
25°	97094
30°	53932
35°	29339
40°	15458
45°	8373
50°	4469
55°	2944
60°	2719
65°	2802
70°	2500
75°	1949
80°	1894
85°	2013

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 0°

Vertical Angle: 45°

Luminance: 8373 cd/sqm

TEST NUMBER: P1268162

CATALOG NUMBER: P3A20R309735D010 E3DL1GPH

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	185.6	22.7
10°-20°	330.0	40.4
20°-30°	190.7	23.3
30°-40°	72.4	8.9
40°-50°	22.2	2.7
50°-60°	7.5	0.9
60°-70°	5.1	0.6
70°-80°	2.7	0.3
80°-90°	0.8	0.1
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	706.3	86.5
0°-40°	778.7	95.3
0°-60°	808.3	98.9
0°-90°	817.0	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	817.0	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	2174	
5°	2061	186
15°	1212	330
25°	401	191
35°	110	72
45°	27	22
55°	8	7
65°	5	5
75°	2	3
85°	1	1
90°	0	

TEST NUMBER: P1268162

CATALOG NUMBER: P3A20R309735D010 E3DL1GPH

CANDELA DISTRIBUTION (FULL):

0°	
0°	2174.1
1°	2172.6
2°	2159.5
3°	2134.8
4°	2103.9
5°	2061.4
6°	2007.4
7°	1947.2
8°	1880.1
9°	1799.8
10°	1714.1
11°	1621.5
12°	1523.5
13°	1420.9
14°	1316.7
15°	1212.5
17.5°	956.2
20°	731.7
22.5°	542.6
25°	401.3
27.5°	291.7
30°	213.0
32.5°	153.6
35°	109.6
37.5°	76.4
40°	54.0
42.5°	37.8
45°	27.0
47.5°	18.5
50°	13.1
52.5°	9.3
55°	7.7
57.5°	6.9
60°	6.2
62.5°	5.4
65°	5.4
67.5°	4.6
70°	3.9
72.5°	3.1
75°	2.3
77.5°	2.3
80°	1.5
82.5°	1.5
85°	0.8
87.5°	0.0



TEST NUMBER: P1268162
CATALOG NUMBER: P3A20R309735D010 E3DL1GPH

CANDELA DISTRIBUTION (continued):

0°
90° | 0.0

(END OF REPORT)