

Scaled data based on original data using  
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-  
State Lighting Products

Test Report Prepared for  
Cooper Lighting Solutions

Brand: IRiS

Report Number: P1268347

Luminaire Tested: P3A20R609735D010 E3DLP1H

Issue Date: 1/30/2026

**Test Information**

Test Method: LM-79-2019  
Report Number: P1268347  
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2601-647-37)  
Test Lab: INNOVATION CENTER  
Issue Date: 1/30/2026  
Manufacturer: COOPER LIGHTING SOLUTIONS  
Product Line: IRiS  
Catalog Number: P3A20R609735D010 E3DLP1H  
Description: 3in Adjustable LED luminaire with, R60 optic, 3500K CCT AND, 97CRI , E3DLP1H TRIM  
Light Source: -  
Ballast/Driver: -

**Summary**


Lumens per Lamp: N/A  
Luminaire Lumens: 1145.0 lumens  
Efficiency: N/A  
Efficacy: 39.8 lumens/watt  
Spacing Criteria (0/90/45): 0.79 / 0.79 / 0.83  
Luminous Opening: Circular (Dia: 0.25' x H: 0')  
CIE Type: Direct

Input Watts (W): 28.8  
Input Voltage (V): NR  
Input Current (Ain): NR  
Voltage Rise (V): NR  
Power Factor: NR  
Total Harmonic Distortion (THDi): NR  
Frequency (hertz): 60  
Stabilization Time: NR  
Operation Time: NR  
Ambient Temperature (°C): NR  
Test Distance: 24 FT

TEST NUMBER: P1268347

CATALOG NUMBER: P3A20R609735D010 E3DLP1H

### Luminous Intensity Polar Plot

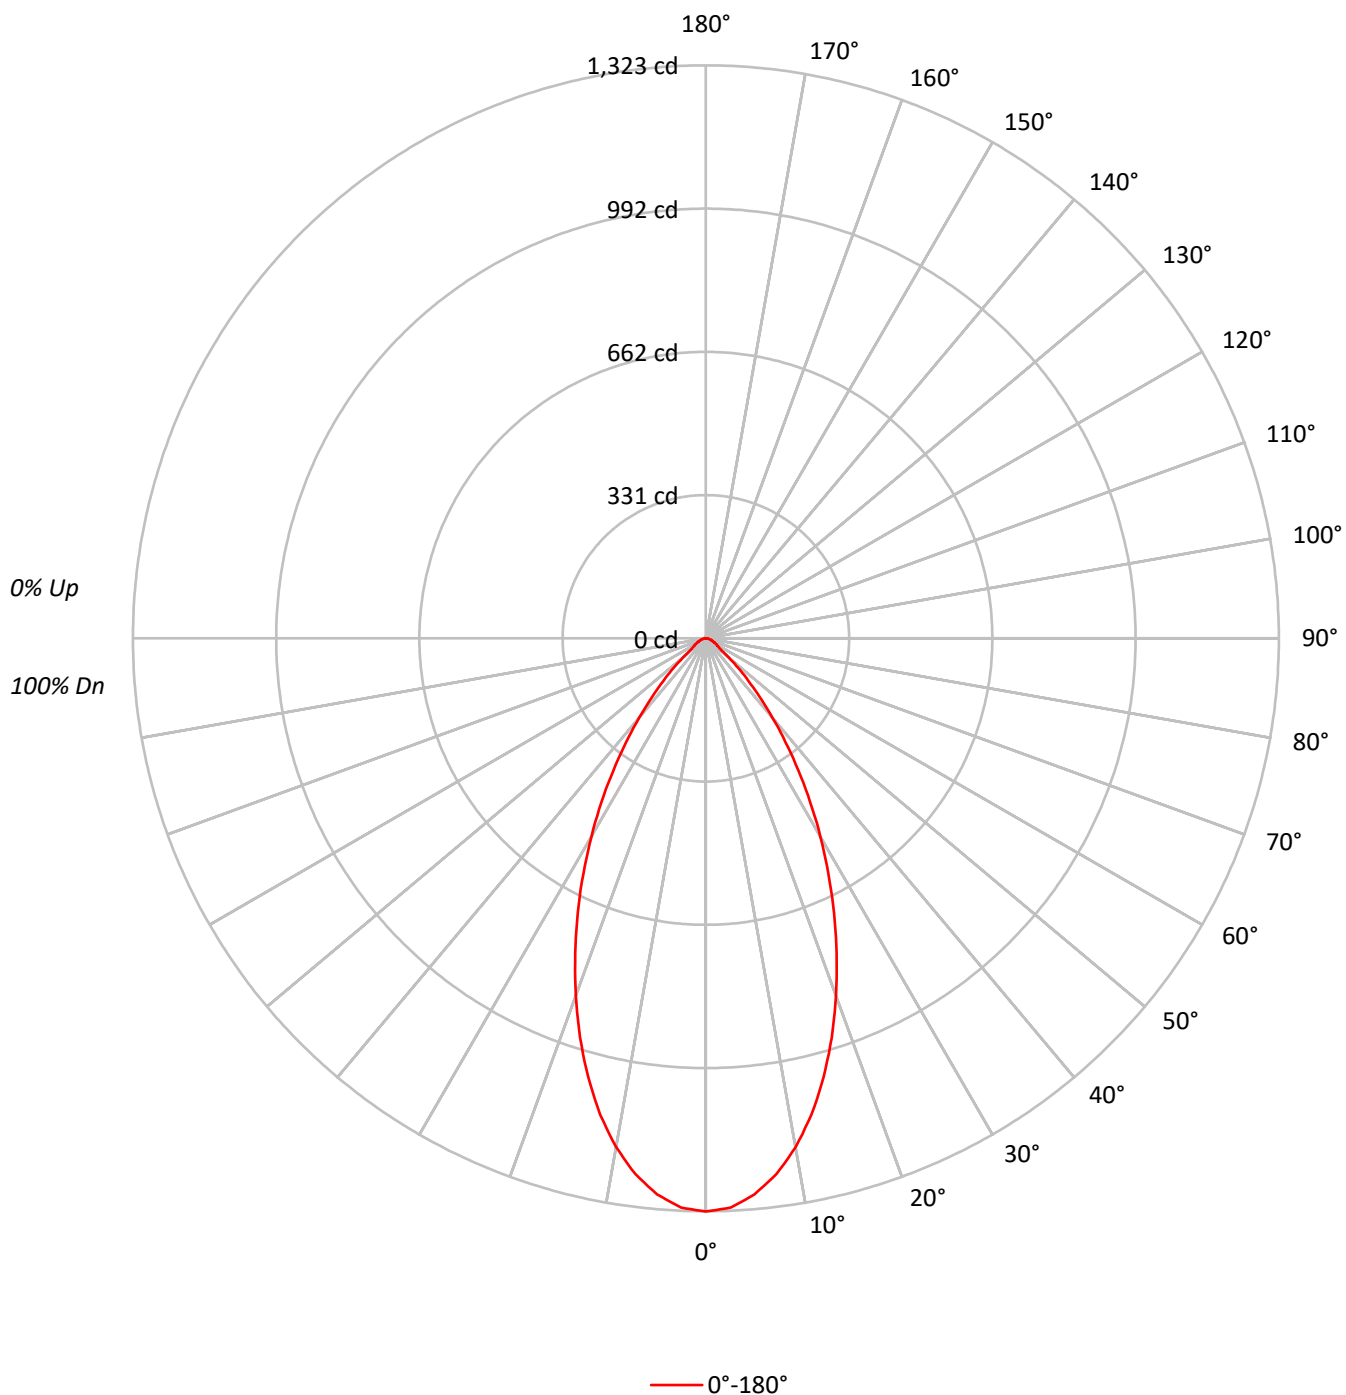

TEST NUMBER: P1268347

CATALOG NUMBER: P3A20R609735D010 E3DLP1H

**COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:**

|     |     |     |     |     |     |     |     |     |     |     |     |  |     |     |     |  |     |
|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|--|-----|-----|-----|--|-----|
| RF  | 20  |     |     |     | 20  |     |     |     | 20  |     |     |  | 20  |     |     |  | 20  |
| RC  | 80  |     |     |     | 70  |     |     |     | 50  |     |     |  | 30  |     |     |  | 0   |
| RW  | 70  | 50  | 30  | 10  | 70  | 50  | 30  | 10  | 50  | 30  | 10  |  | 50  | 30  | 10  |  | 0   |
| RCR |     |     |     |     |     |     |     |     |     |     |     |  |     |     |     |  |     |
| 0   | 119 | 119 | 119 | 119 | 116 | 116 | 116 | 116 | 111 | 111 | 111 |  | 106 | 106 | 106 |  | 100 |
| 1   | 113 | 110 | 107 | 105 | 110 | 108 | 105 | 103 | 104 | 102 | 100 |  | 100 | 98  | 97  |  | 92  |
| 2   | 107 | 101 | 97  | 93  | 104 | 100 | 96  | 92  | 96  | 93  | 90  |  | 93  | 91  | 88  |  | 85  |
| 3   | 101 | 94  | 88  | 84  | 99  | 92  | 87  | 83  | 90  | 86  | 82  |  | 87  | 84  | 81  |  | 78  |
| 4   | 95  | 87  | 81  | 77  | 93  | 86  | 80  | 76  | 84  | 79  | 75  |  | 82  | 78  | 74  |  | 72  |
| 5   | 90  | 81  | 75  | 70  | 88  | 80  | 74  | 70  | 78  | 73  | 69  |  | 77  | 72  | 69  |  | 66  |
| 6   | 85  | 76  | 69  | 65  | 84  | 75  | 69  | 65  | 73  | 68  | 64  |  | 72  | 67  | 64  |  | 62  |
| 7   | 81  | 71  | 65  | 60  | 79  | 70  | 64  | 60  | 69  | 64  | 60  |  | 68  | 63  | 59  |  | 57  |
| 8   | 77  | 67  | 60  | 56  | 75  | 66  | 60  | 56  | 65  | 60  | 56  |  | 64  | 59  | 55  |  | 54  |
| 9   | 73  | 63  | 57  | 52  | 72  | 62  | 56  | 52  | 61  | 56  | 52  |  | 60  | 55  | 52  |  | 50  |
| 10  | 69  | 59  | 53  | 49  | 68  | 59  | 53  | 49  | 58  | 53  | 49  |  | 57  | 52  | 49  |  | 47  |

**AVERAGE LUMINANCE (cd/sqm):**

|     |        |
|-----|--------|
|     | 0°     |
| 0°  | 290174 |
| 5°  | 283666 |
| 10° | 265571 |
| 15° | 238253 |
| 20° | 204884 |
| 25° | 169413 |
| 30° | 133869 |
| 35° | 99394  |
| 40° | 68471  |
| 45° | 42950  |
| 50° | 23607  |
| 55° | 13839  |
| 60° | 12411  |
| 65° | 10637  |
| 70° | 9104   |
| 75° | 9320   |
| 80° | 7956   |
| 85° | 7799   |

**MAXIMUM LUMINANCE 45°-90°:**

Horizontal Angle: 0°

Vertical Angle: 45°

Luminance: 42950 cd/sqm

TEST NUMBER: P1268347

CATALOG NUMBER: P3A20R609735D010 E3DLP1H

**ZONAL LUMENS:**

| Zone      | Lumens | % Fixture |
|-----------|--------|-----------|
| 0°-10°    | 120.0  | 10.5      |
| 10°-20°   | 291.5  | 25.5      |
| 20°-30°   | 319.7  | 27.9      |
| 30°-40°   | 232.9  | 20.3      |
| 40°-50°   | 110.0  | 9.6       |
| 50°-60°   | 36.0   | 3.1       |
| 60°-70°   | 20.4   | 1.8       |
| 70°-80°   | 11.0   | 1.0       |
| 80°-90°   | 3.4    | 0.3       |
| 90°-100°  | 0.0    | 0.0       |
| 100°-110° | 0.0    | 0.0       |
| 110°-120° | 0.0    | 0.0       |
| 120°-130° | 0.0    | 0.0       |
| 130°-140° | 0.0    | 0.0       |
| 140°-150° | 0.0    | 0.0       |
| 150°-160° | 0.0    | 0.0       |
| 160°-170° | 0.0    | 0.0       |
| 170°-180° | 0.0    | 0.0       |
| <hr/>     |        |           |
| 0°-30°    | 731.2  | 63.9      |
| 0°-40°    | 964.1  | 84.2      |
| 0°-60°    | 1110.1 | 97.0      |
| 0°-90°    | 1145.0 | 100.0     |
| 90°-120°  | 0.0    | 0.0       |
| 90°-150°  | 0.0    | 0.0       |
| 90°-180°  | 0.0    | 0.0       |
| 0°-180°   | 1145.0 | 100.0     |

**CANDELA DISTRIBUTION:**

|     | 0°   | Flux |
|-----|------|------|
| 0°  | 1323 |      |
| 5°  | 1289 | 120  |
| 15° | 1050 | 291  |
| 25° | 700  | 320  |
| 35° | 371  | 233  |
| 45° | 138  | 110  |
| 55° | 36   | 36   |
| 65° | 20   | 20   |
| 75° | 11   | 11   |
| 85° | 3    | 3    |
| 90° | 0    |      |

TEST NUMBER: P1268347

CATALOG NUMBER: P3A20R609735D010 E3DLP1H

**CANDELA DISTRIBUTION (FULL):**

|       | 0°     |
|-------|--------|
| 0°    | 1323.3 |
| 2.5°  | 1315.5 |
| 5°    | 1288.7 |
| 7.5°  | 1247.8 |
| 10°   | 1192.7 |
| 12.5° | 1126.6 |
| 15°   | 1049.5 |
| 17.5° | 966.1  |
| 20°   | 878.0  |
| 22.5° | 788.3  |
| 25°   | 700.2  |
| 27.5° | 612.1  |
| 30°   | 528.7  |
| 32.5° | 448.4  |
| 35°   | 371.3  |
| 37.5° | 302.1  |
| 40°   | 239.2  |
| 42.5° | 184.1  |
| 45°   | 138.5  |
| 47.5° | 100.7  |
| 50°   | 69.2   |
| 52.5° | 45.6   |
| 55°   | 36.2   |
| 57.5° | 31.5   |
| 60°   | 28.3   |
| 62.5° | 23.6   |
| 65°   | 20.5   |
| 67.5° | 17.3   |
| 70°   | 14.2   |
| 72.5° | 12.6   |
| 75°   | 11.0   |
| 77.5° | 7.9    |
| 80°   | 6.3    |
| 82.5° | 4.7    |
| 85°   | 3.1    |
| 87.5° | 1.6    |
| 90°   | 0.0    |

(END OF REPORT)