

Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for
Cooper Lighting Solutions

Brand: IRiS

Report Number: P1266715

Luminaire Tested: P3A05R409735DE010 E3DL1WMH

Issue Date: 1/30/2026

Test Information

Test Method: LM-79-2019
Report Number: P1266715
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2601-647-23)
Test Lab: INNOVATION CENTER
Issue Date: 1/30/2026
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: IRiS
Catalog Number: P3A05R409735DE010 E3DL1WMH
Description: 3in Adjustable LED luminaire with, R40 optic, 3500K CCT AND, 97CRI , E3DL1WMH TRIM
Light Source: -
Ballast/Driver: -


Summary

Lumens per Lamp: N/A
Luminaire Lumens: 543.0 lumens
Efficiency: N/A
Efficacy: 75.4 lumens/watt
Spacing Criteria (0/90/45): 0.65 / 0.65 / 0.63
Luminous Opening: Circular (Dia: 0.25' x H: 0')
CIE Type: Direct

Input Watts (W): 7.2
Input Voltage (V): NR
Input Current (A_{in}): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT

TEST NUMBER: P1266715
CATALOG NUMBER: P3A05R409735DE010 E3DL1WMH

Luminous Intensity Polar Plot

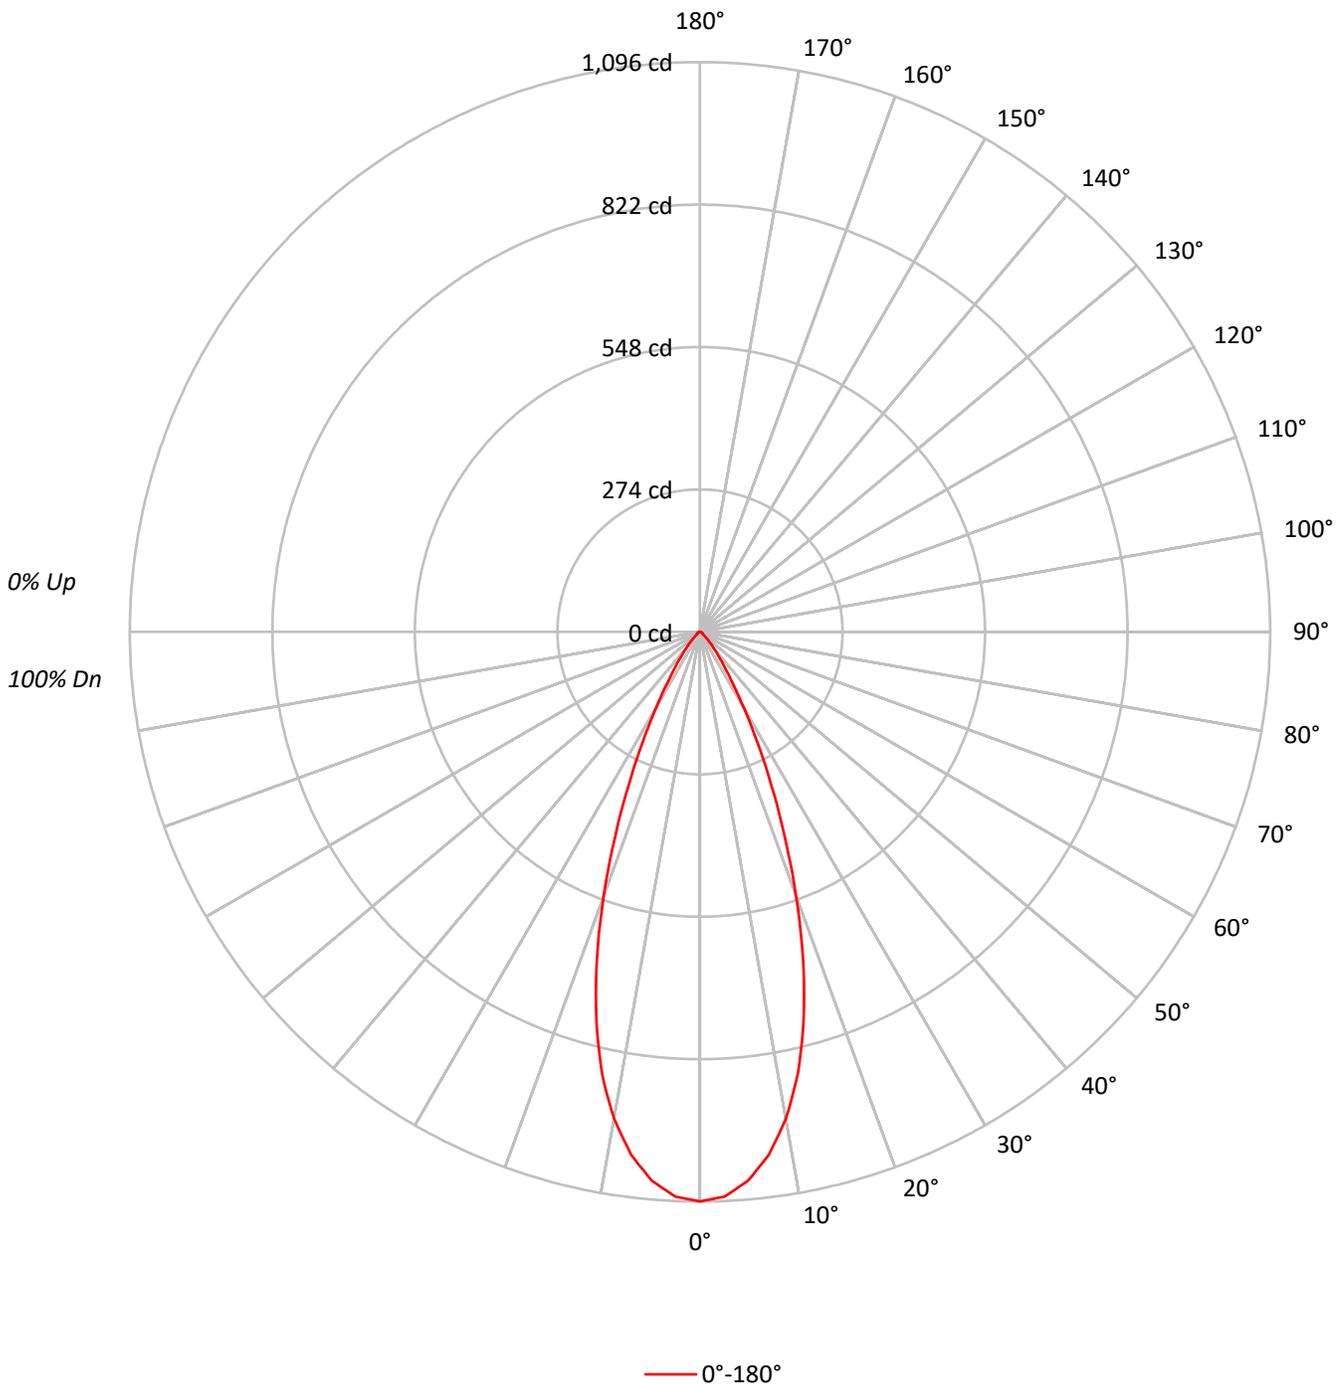



TEST NUMBER: P1266715
 CATALOG NUMBER: P3A05R409735DE010 E3DL1WMH

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20				20
RC	80				70				50				30				10				0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																					
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	102	102	102	100
1	114	111	109	107	112	109	107	105	105	104	102	102	100	99	98	97	96	96	96	96	94
2	109	105	101	98	107	103	100	97	100	97	95	97	95	93	94	92	91	91	91	91	89
3	104	99	94	91	102	97	93	90	95	91	88	92	89	87	90	88	86	86	86	86	84
4	100	93	88	85	98	92	88	84	90	86	83	88	85	82	86	84	81	81	81	81	80
5	96	88	83	79	94	88	83	79	86	82	78	84	81	78	83	80	77	77	77	77	76
6	92	84	79	75	91	83	78	75	82	78	74	81	77	74	79	76	73	73	73	73	72
7	88	80	75	71	87	79	74	71	78	74	71	77	73	70	76	73	70	70	70	70	69
8	85	76	71	68	84	76	71	67	75	70	67	74	70	67	73	69	67	67	67	67	65
9	82	73	68	64	81	73	68	64	72	67	64	71	67	64	70	66	64	64	64	64	63
10	78	70	65	62	78	70	65	61	69	64	61	68	64	61	67	64	61	61	61	61	60

AVERAGE LUMINANCE (cd/sqm):

	0°
0°	240266
5°	233281
10°	211708
15°	174893
20°	126151
25°	78029
30°	42260
35°	21844
40°	11879
45°	6636
50°	3343
55°	2485
60°	2237
65°	2179
70°	2116
75°	1949
80°	1768
85°	1258

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 0°
 Vertical Angle: 45°
 Luminance: 6636 cd/sqm



TEST NUMBER: P1266715
 CATALOG NUMBER: P3A05R409735DE010 E3DL1WMH

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	97.7	18.0
10°-20°	209.8	38.6
20°-30°	149.7	27.6
30°-40°	55.1	10.2
40°-50°	17.3	3.2
50°-60°	6.0	1.1
60°-70°	4.2	0.8
70°-80°	2.5	0.5
80°-90°	0.7	0.1
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	457.2	84.2
0°-40°	512.3	94.3
0°-60°	535.7	98.7
0°-90°	543.0	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	543.0	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	1096	
5°	1060	98
15°	770	210
25°	322	150
35°	82	55
45°	21	17
55°	6	6
65°	4	4
75°	2	2
85°	0	1
90°	0	



TEST NUMBER: P1266715
CATALOG NUMBER: P3A05R409735DE010 E3DL1WMH

CANDELA DISTRIBUTION (FULL):

0°	
0°	1095.7
2.5°	1087.3
5°	1059.8
7.5°	1014.2
10°	950.8
12.5°	870.2
15°	770.4
17.5°	658.6
20°	540.6
22.5°	424.6
25°	322.5
27.5°	236.8
30°	166.9
32.5°	117.0
35°	81.6
37.5°	57.8
40°	41.5
42.5°	29.8
45°	21.4
47.5°	14.4
50°	9.8
52.5°	7.0
55°	6.5
57.5°	6.1
60°	5.1
62.5°	4.7
65°	4.2
67.5°	3.7
70°	3.3
72.5°	2.8
75°	2.3
77.5°	1.9
80°	1.4
82.5°	0.9
85°	0.5
87.5°	0.5
90°	0.0

(END OF REPORT)