

Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for
Cooper Lighting Solutions

Brand: IRiS

Report Number: P1266752

Luminaire Tested: P3A05R459735DE010 E3DLP1WMH

Issue Date: 1/30/2026

Test Information

Test Method: LM-79-2019
Report Number: P1266752
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2601-647-25)
Test Lab: INNOVATION CENTER
Issue Date: 1/30/2026
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: IRiS
Catalog Number: P3A05R459735DE010 E3DLP1WMH
Description: 3in Adjustable LED luminaire with, R45 optic, 3500K CCT AND, 97CRI , E3DLP1WMH TRIM
Light Source: -
Ballast/Driver: -

Summary


Lumens per Lamp: N/A
Luminaire Lumens: 336.0 lumens
Efficiency: N/A
Efficacy: 46.7 lumens/watt
Spacing Criteria (0/90/45): 0.73 / 0.73 / 0.76
Luminous Opening: Circular (Dia: 0.25' x H: 0')
CIE Type: Direct

Input Watts (W): 7.2
Input Voltage (V): NR
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT

TEST NUMBER: P1266752

CATALOG NUMBER: P3A05R459735DE010 E3DLP1WMH

Luminous Intensity Polar Plot

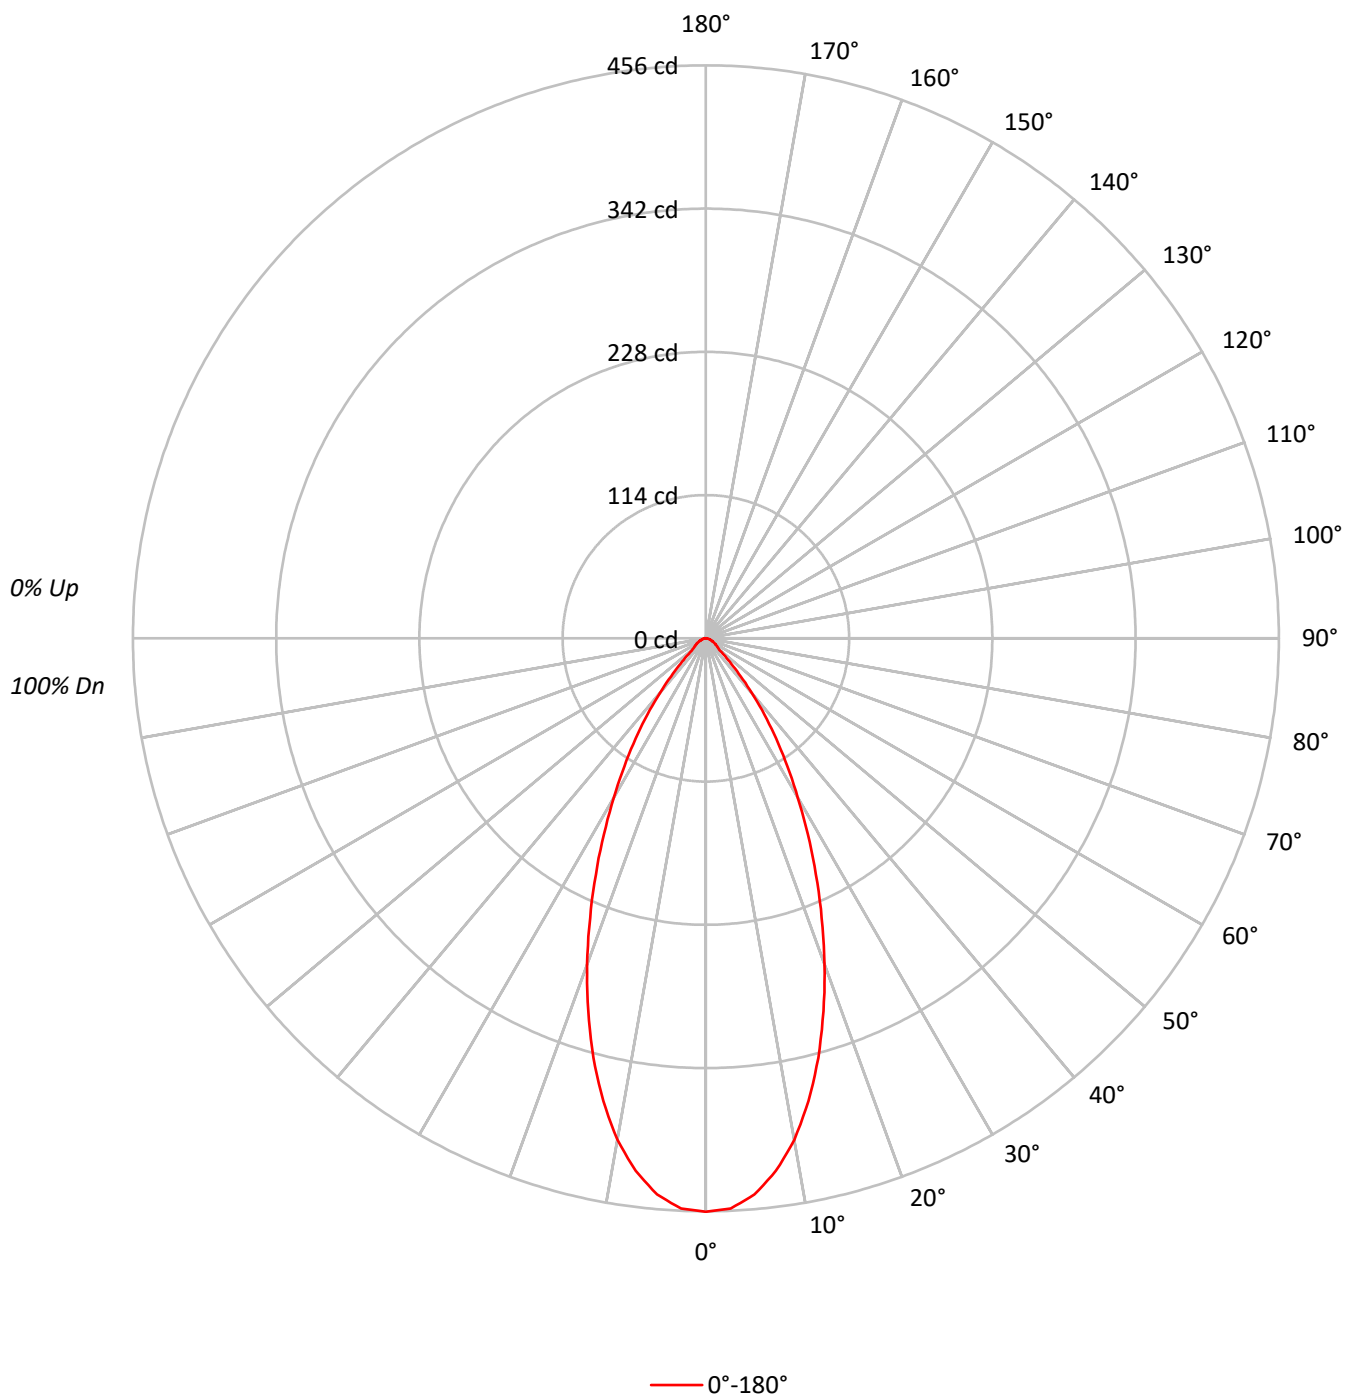

TEST NUMBER: P1266752

CATALOG NUMBER: P3A05R459735DE010 E3DLP1WMH

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20
RC	80				70				50				30				10
RW	70	50	30	10	70	50	30	10	50	30	10		50	30	10		50
RCR																	
0	119	119	119	119	116	116	116	116	111	111	111		106	106	106		102
1	113	110	107	105	111	108	106	103	104	102	100		100	99	97		97
2	107	102	98	94	105	100	96	93	97	94	91		94	91	89		91
3	102	95	90	85	100	93	89	85	91	87	83		88	85	82		86
4	96	88	83	78	94	87	82	78	85	81	77		83	79	76		81
5	91	83	77	72	90	82	76	72	80	75	71		78	74	71		77
6	87	78	72	67	85	77	71	67	75	70	66		74	69	66		73
7	83	73	67	63	81	72	67	63	71	66	62		70	65	62		69
8	79	69	63	59	77	68	63	59	67	62	58		66	62	58		65
9	75	65	59	55	74	65	59	55	64	59	55		63	58	55		62
10	72	62	56	52	71	61	56	52	61	55	52		60	55	52		59

AVERAGE LUMINANCE (cd/sqm):

	0°
0°	100080
5°	97799
10°	90223
15°	78457
20°	64452
25°	50132
30°	37018
35°	26046
40°	16259
45°	8807
50°	4776
55°	4091
60°	3684
65°	3165
70°	2693
75°	2796
80°	2399
85°	2264

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 0°

Vertical Angle: 45°

Luminance: 8807 cd/sqm

TEST NUMBER: P1266752

CATALOG NUMBER: P3A05R459735DE010 E3DLP1WMH

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	41.1	12.2
10°-20°	95.5	28.4
20°-30°	94.8	28.2
30°-40°	61.1	18.2
40°-50°	23.5	7.0
50°-60°	9.6	2.8
60°-70°	6.1	1.8
70°-80°	3.3	1.0
80°-90°	1.0	0.3
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	231.5	68.9
0°-40°	292.6	87.1
0°-60°	325.7	96.9
0°-90°	336.0	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	336.0	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	456	
5°	444	41
15°	346	96
25°	207	95
35°	97	61
45°	28	24
55°	11	10
65°	6	6
75°	3	3
85°	1	1
90°	0	

TEST NUMBER: P1266752

CATALOG NUMBER: P3A05R459735DE010 E3DLP1WMH

CANDELA DISTRIBUTION (FULL):

0°	
0°	456.4
2.5°	454.1
5°	444.3
7.5°	427.5
10°	405.2
12.5°	377.2
15°	345.6
17.5°	311.1
20°	276.2
22.5°	240.8
25°	207.2
27.5°	175.6
30°	146.2
32.5°	120.6
35°	97.3
37.5°	76.4
40°	56.8
42.5°	41.0
45°	28.4
47.5°	19.1
50°	14.0
52.5°	11.6
55°	10.7
57.5°	9.3
60°	8.4
62.5°	7.0
65°	6.1
67.5°	5.1
70°	4.2
72.5°	3.7
75°	3.3
77.5°	2.3
80°	1.9
82.5°	1.4
85°	0.9
87.5°	0.5
90°	0.0

(END OF REPORT)