

Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for
Cooper Lighting Solutions

Brand: IRiS

Report Number: P1266913

Luminaire Tested: P3A09R109735DE010 E3DL1LI

Issue Date: 1/30/2026

Test Information

Test Method: LM-79-2019
Report Number: P1266913
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2601-647-3)
Test Lab: INNOVATION CENTER
Issue Date: 1/30/2026
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: IRiS
Catalog Number: P3A09R109735DE010 E3DL1LI
Description: 3in Adjustable LED luminaire with, R10 optic, 3500K CCT AND, 97CRI , E3DL1LI TRIM
Light Source: -
Ballast/Driver: -

Summary


Lumens per Lamp: N/A
Luminaire Lumens: 566.0 lumens
Efficiency: N/A
Efficacy: 45.3 lumens/watt
Spacing Criteria (0/90/45): 0.4 / 0.4 / 0.43
Luminous Opening: Circular (Dia: 0.25' x H: 0')
CIE Type: Direct

Input Watts (W): 12.5
Input Voltage (V): NR
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT

TEST NUMBER: P1266913

CATALOG NUMBER: P3A09R109735DE010 E3DL1LI

Luminous Intensity Polar Plot

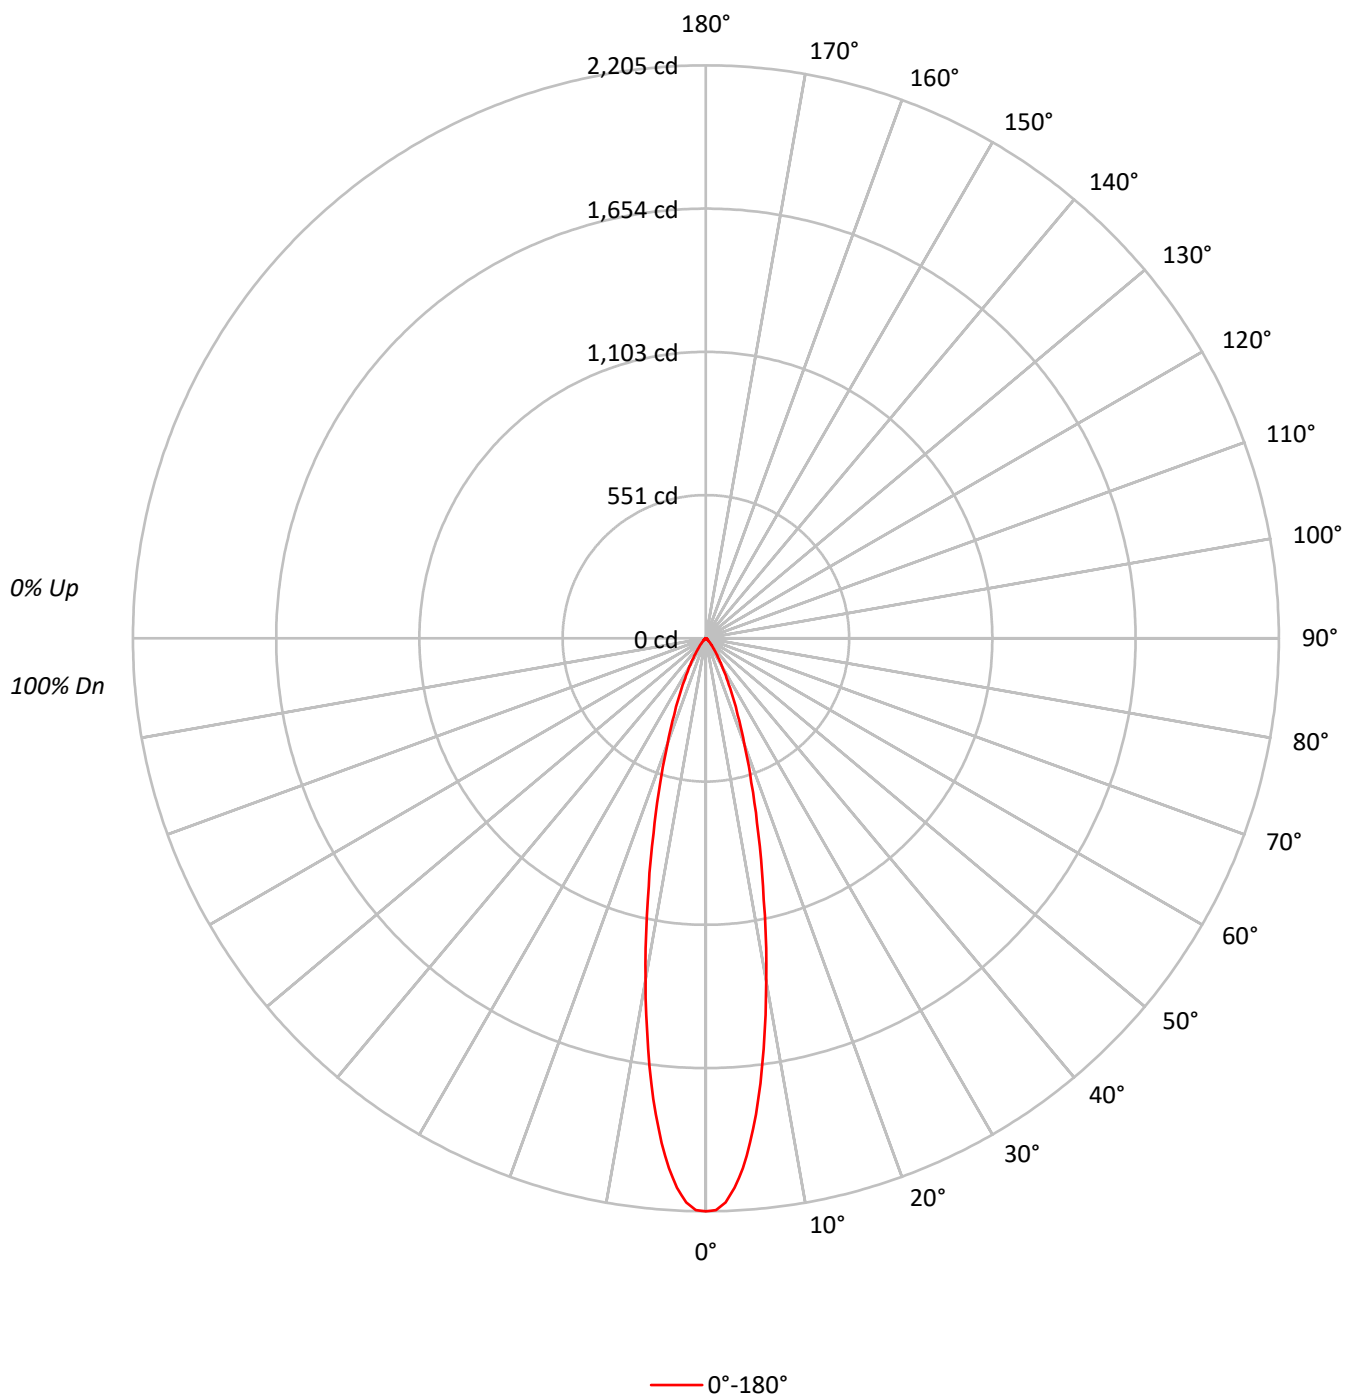

TEST NUMBER: P1266913

CATALOG NUMBER: P3A09R109735DE010 E3DL1LI

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20					20					20					20					20
RC	80					70					50					30					0
RW	70	50	30	10		70	50	30	10		50	30	10		50	30	10		50	30	10
RCR																					
0	119	119	119	119		116	116	116	116		111	111	111		106	106	106		102	102	102
1	114	112	110	108		112	110	108	106		106	104	103		102	101	100		99	98	97
2	110	106	103	100		108	104	101	99		101	99	97		98	96	95		96	94	93
3	106	101	97	93		104	99	96	93		97	94	91		94	92	90		92	90	88
4	102	96	92	88		100	95	91	88		93	89	87		91	88	86		89	87	85
5	98	92	87	84		97	91	87	83		89	85	83		88	84	82		86	83	81
6	95	88	83	80		94	87	83	80		86	82	79		85	81	79		83	80	78
7	92	85	80	77		91	84	80	76		83	79	76		82	78	76		81	78	75
8	89	81	77	74		88	81	77	73		80	76	73		79	75	73		78	75	73
9	86	79	74	71		85	78	74	71		77	73	71		77	73	70		76	73	70
10	84	76	71	68		83	76	71	68		75	71	68		74	71	68		74	70	68

AVERAGE LUMINANCE (cd/sqm):

	0°
0°	483514
5°	429187
10°	298057
15°	176255
20°	100389
25°	57390
30°	31752
35°	16918
40°	9360
45°	5086
50°	3173
55°	2485
60°	2149
65°	1972
70°	1731
75°	1864
80°	1389
85°	1258

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 0°
Vertical Angle: 45°
Luminance: 5086 cd/sqm

TEST NUMBER: P1266913

CATALOG NUMBER: P3A09R109735DE010 E3DL1LI

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	165.8	29.3
10°-20°	218.8	38.7
20°-30°	112.7	19.9
30°-40°	42.3	7.5
40°-50°	13.8	2.4
50°-60°	6.0	1.1
60°-70°	3.8	0.7
70°-80°	2.2	0.4
80°-90°	0.6	0.1
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	497.3	87.9
0°-40°	539.6	95.3
0°-60°	559.4	98.8
0°-90°	566.0	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	566.0	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	2205	
5°	1950	166
15°	776	219
25°	237	113
35°	63	42
45°	16	14
55°	6	6
65°	4	4
75°	2	2
85°	0	1
90°	0	

TEST NUMBER: P1266913

CATALOG NUMBER: P3A09R109735DE010 E3DL1LI

CANDELA DISTRIBUTION (FULL):

0°	
0°	2205.0
1°	2200.6
2°	2171.7
3°	2116.7
4°	2044.1
5°	1949.8
6°	1842.9
7°	1725.7
8°	1595.4
9°	1466.7
10°	1338.6
12.5°	1030.0
15°	776.4
17.5°	581.2
20°	430.2
22.5°	321.2
25°	237.2
27.5°	172.8
30°	125.4
32.5°	88.9
35°	63.2
37.5°	45.3
40°	32.7
42.5°	23.4
45°	16.4
47.5°	12.0
50°	9.3
52.5°	7.6
55°	6.5
57.5°	5.5
60°	4.9
62.5°	4.4
65°	3.8
67.5°	3.3
70°	2.7
72.5°	2.7
75°	2.2
77.5°	1.6
80°	1.1
82.5°	1.1
85°	0.5
87.5°	0.0
90°	0.0

(END OF REPORT)