

Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for
Cooper Lighting Solutions

Brand: IRiS

Report Number: P1266926

Luminaire Tested: P3A09R109735DE010 E3PHLP1MW

Issue Date: 1/29/2026

Test Information

Test Method: LM-79-2019
Report Number: P1266926
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2509-551-5)
Test Lab: INNOVATION CENTER
Issue Date: 1/29/2026
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: IRiS
Catalog Number: P3A09R109735DE010 E3PHLP1MW
Description: 3in Adjustable LED luminaire with, R10 optic, 3500K CCT AND, 97CRI , E3PHLP1MW TRIM
Light Source: -
Ballast/Driver: -

Summary


Lumens per Lamp: N/A
Luminaire Lumens: 297.0 lumens
Efficiency: N/A
Efficacy: 23.8 lumens/watt
Spacing Criteria (0/90/45): 0.51 / 0.51 / 0.6
Luminous Opening: Circular (Dia: 0.25' x H: 0')
CIE Type: Direct

Input Watts (W): 12.5
Input Voltage (V): NR
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT

TEST NUMBER: P1266926

CATALOG NUMBER: P3A09R109735DE010 E3PHLP1MW

Luminous Intensity Polar Plot

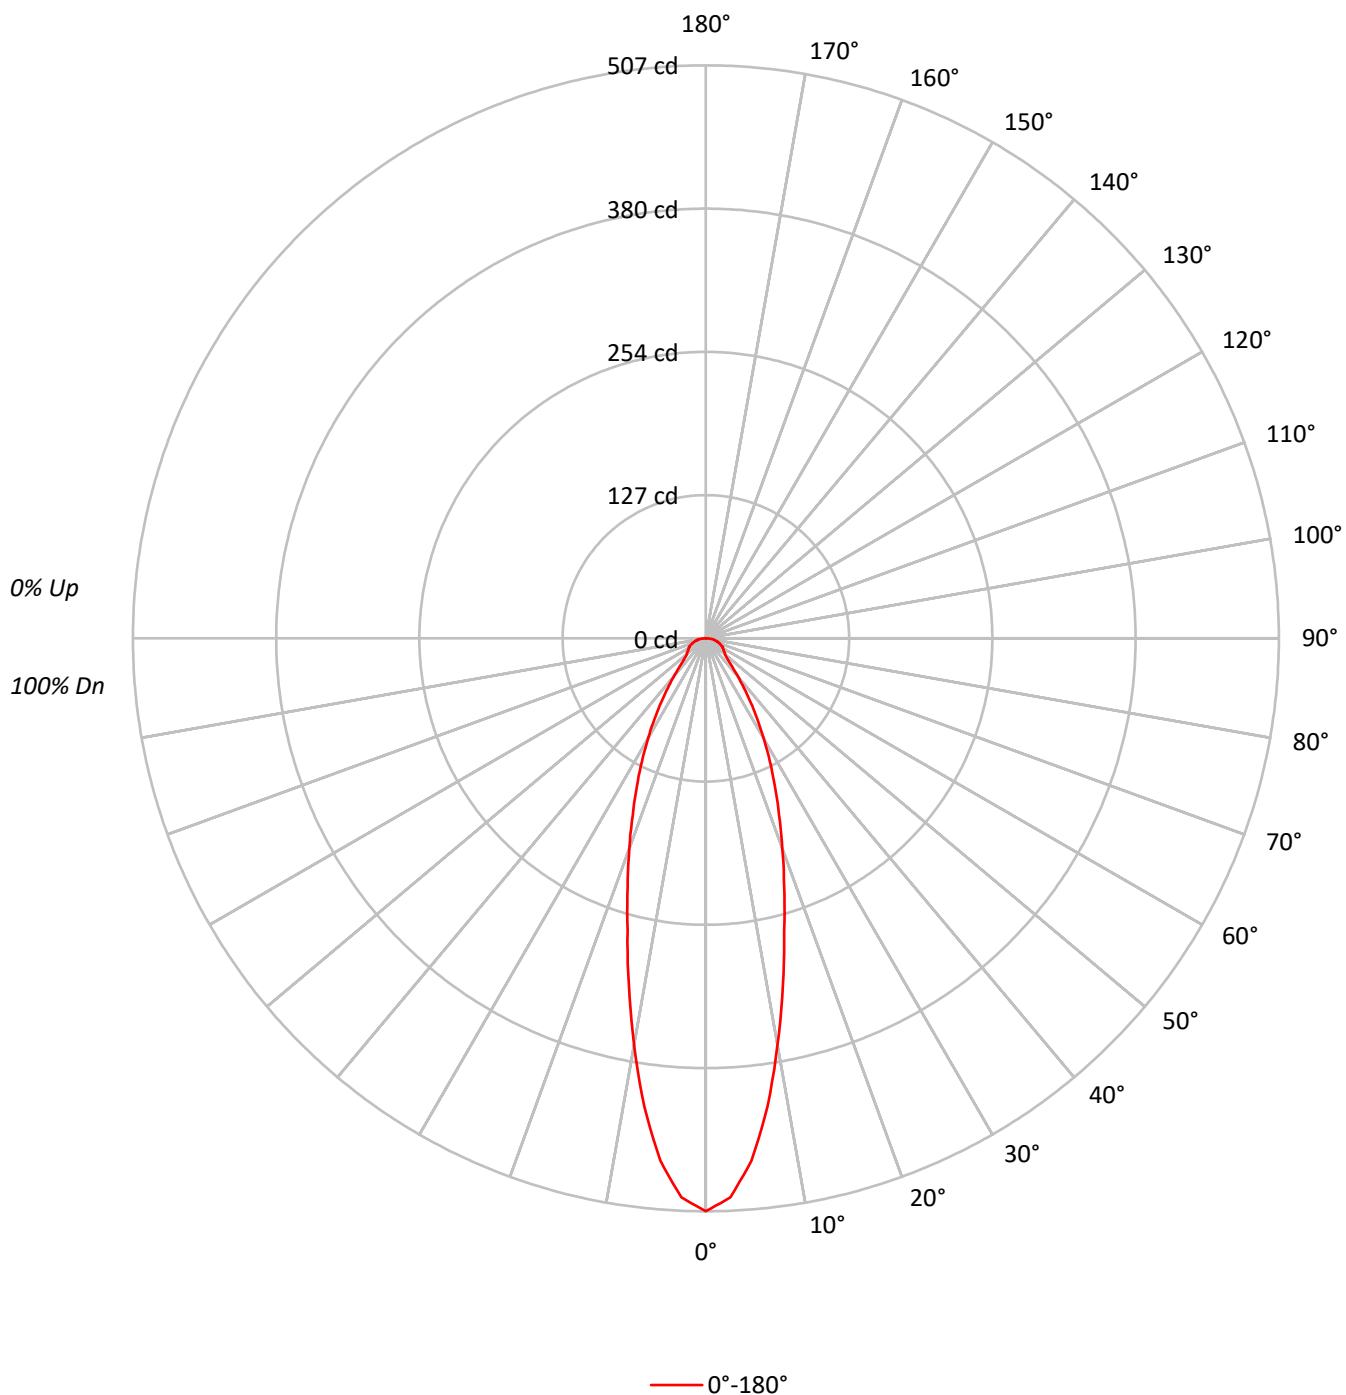

TEST NUMBER: P1266926

CATALOG NUMBER: P3A09R109735DE010 E3PHLP1MW

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20
RC	80				70				50				30				10
RW	70	50	30	10	70	50	30	10	50	30	10		50	30	10		50
RCR																	
0	119	119	119	119	116	116	116	116	111	111	111		106	106	106		102
1	112	108	105	102	109	106	103	100	102	99	97		98	96	94		95
2	105	99	94	90	102	97	92	89	94	90	87		91	87	85		88
3	99	91	85	80	96	89	84	80	87	82	78		84	80	77		82
4	93	84	78	73	91	83	77	72	81	76	71		79	74	71		77
5	88	78	72	67	86	77	71	67	76	70	66		74	69	65		72
6	83	73	67	62	82	73	66	62	71	65	61		70	65	61		68
7	79	69	62	58	78	68	62	58	67	61	57		66	61	57		65
8	75	65	59	54	74	65	58	54	63	58	54		62	57	54		61
9	72	62	55	51	71	61	55	51	60	55	51		59	54	51		58
10	69	59	52	48	68	58	52	48	57	52	48		56	51	48		56

AVERAGE LUMINANCE (cd/sqm):

	0°
0°	111153
5°	102069
10°	81339
15°	60772
20°	46157
25°	34938
30°	25852
35°	18471
40°	12652
45°	8838
50°	7539
55°	7378
60°	7675
65°	8094
70°	8271
75°	8557
80°	9345
85°	9309

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 0°

Vertical Angle: 82.5°

Luminance: 10752 cd/sqm

TEST NUMBER: P1266926

CATALOG NUMBER: P3A09R109735DE010 E3PHLP1MW

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	41.1	13.8
10°-20°	75.1	25.3
20°-30°	66.5	22.4
30°-40°	43.6	14.7
40°-50°	23.3	7.8
50°-60°	17.6	5.9
60°-70°	15.2	5.1
70°-80°	10.4	3.5
80°-90°	4.2	1.4
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	182.7	61.5
0°-40°	226.3	76.2
0°-60°	267.2	90.0
0°-90°	297.0	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	297.0	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	507	
5°	464	41
15°	268	75
25°	144	67
35°	69	44
45°	28	23
55°	19	18
65°	16	15
75°	10	10
85°	4	4
90°	0	

TEST NUMBER: P1266926

CATALOG NUMBER: P3A09R109735DE010 E3PHLP1MW

CANDELA DISTRIBUTION (FULL):

0°	
0°	506.9
2.5°	495.0
5°	463.7
7.5°	417.7
10°	365.3
12.5°	314.7
15°	267.7
17.5°	230.0
20°	197.8
22.5°	169.3
25°	144.4
27.5°	122.4
30°	102.1
32.5°	84.6
35°	69.0
37.5°	55.2
40°	44.2
42.5°	35.0
45°	28.5
47.5°	24.8
50°	22.1
52.5°	21.2
55°	19.3
57.5°	18.4
60°	17.5
62.5°	16.6
65°	15.6
67.5°	13.8
70°	12.9
72.5°	11.0
75°	10.1
77.5°	8.3
80°	7.4
82.5°	6.4
85°	3.7
87.5°	1.8
90°	0.0

(END OF REPORT)