

Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for
Cooper Lighting Solutions

Brand: IRiS

Report Number: P1267084

Luminaire Tested: P3A09R409735DE010 E3D1LI

Issue Date: 1/29/2026

Test Information

Test Method: LM-79-2019
Report Number: P1267084
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2501-338-12)
Test Lab: INNOVATION CENTER
Issue Date: 1/29/2026
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: IRiS
Catalog Number: P3A09R409735DE010 E3D1LI
Description: 3in Adjustable LED luminaire with, R40 optic, 3500K CCT AND, 97CRI , E3D1LI TRIM
Light Source: -
Ballast/Driver: -


Summary

Lumens per Lamp: N/A
Luminaire Lumens: 955.0 lumens
Efficiency: N/A
Efficacy: 86.0 lumens/watt
Spacing Criteria (0/90/45): 0.7 / 0.7 / 0.6
Luminous Opening: Circular (Dia: 0.25' x H: 0')
CIE Type: Direct

Input Watts (W): 11.1
Input Voltage (V): NR
Input Current (A_{in}): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT

TEST NUMBER: P1267084
CATALOG NUMBER: P3A09R409735DE010 E3D1LI

Luminous Intensity Polar Plot

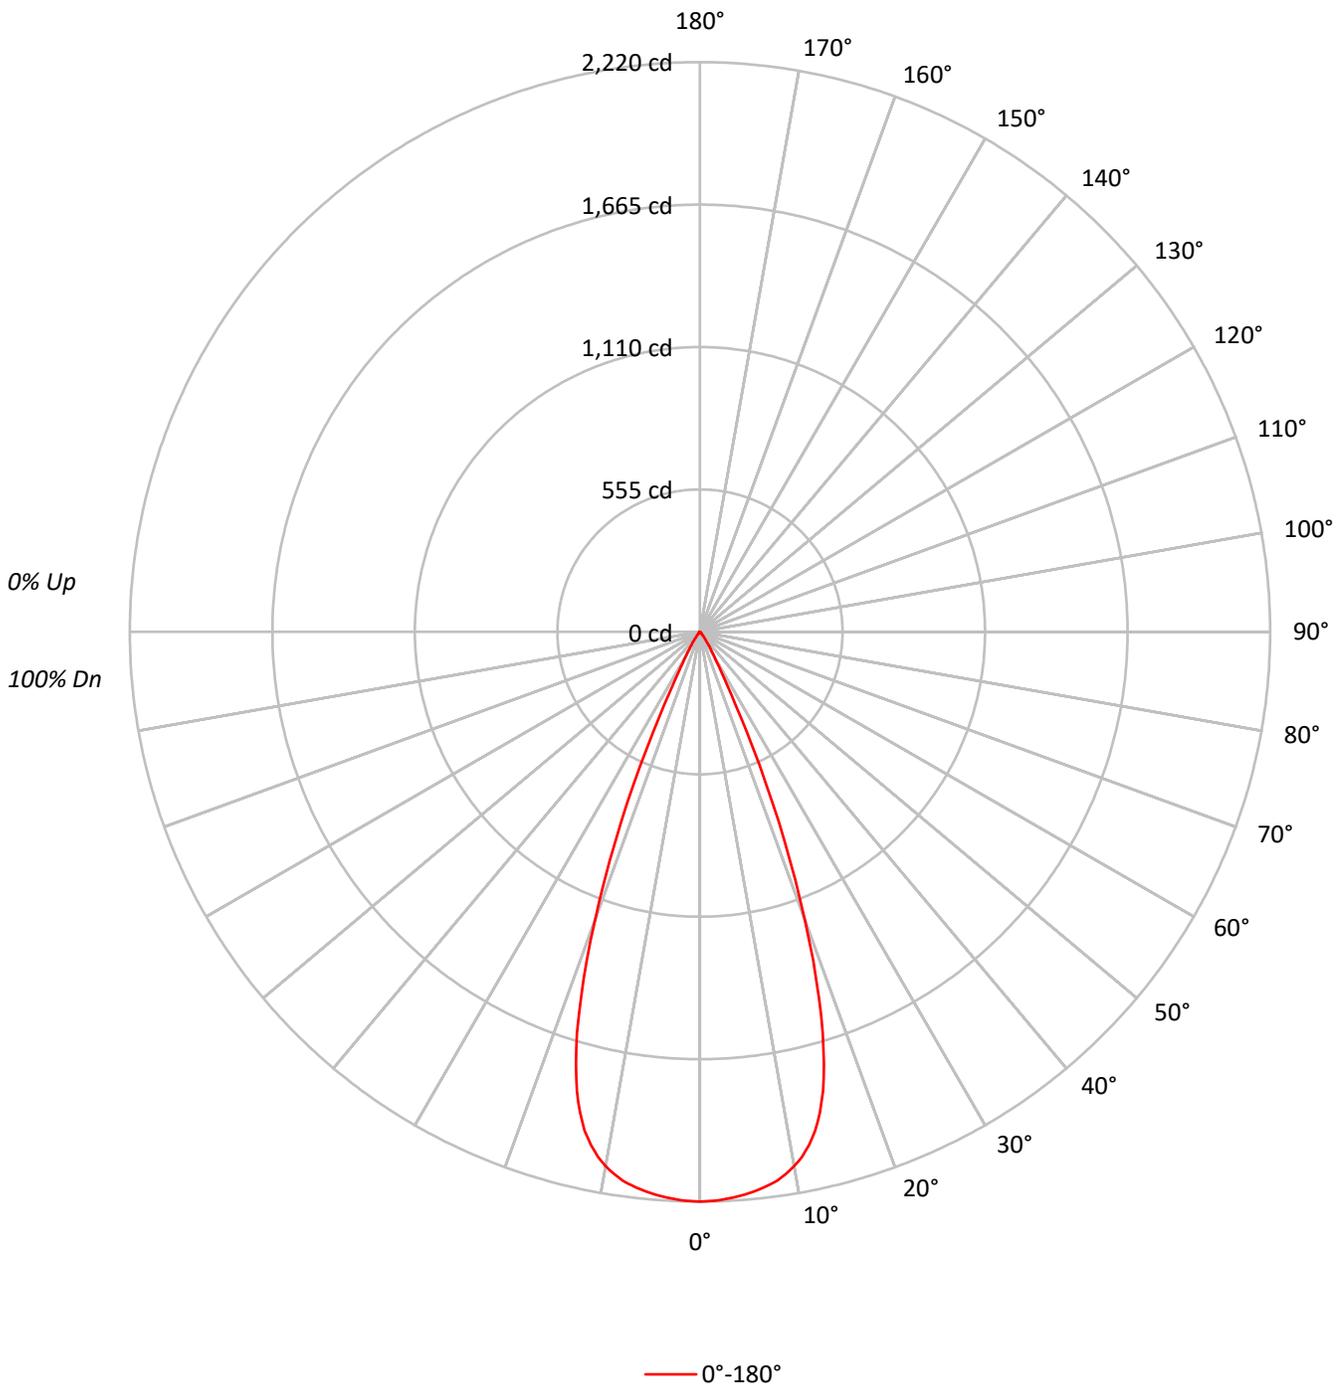



TEST NUMBER: P1267084
 CATALOG NUMBER: P3A09R409735DE010 E3D1LI

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20			
RC	80				70				50				30				10			0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10
RCR																				
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100	100	100
1	115	112	110	109	112	110	109	107	106	105	104	103	102	101	99	98	98	96	96	96
2	111	107	104	101	109	105	102	100	102	100	98	99	97	96	96	95	94	92	92	92
3	107	102	98	95	105	100	97	94	98	95	93	96	93	91	93	91	90	88	88	88
4	103	97	93	90	101	96	92	89	94	91	88	92	89	87	90	88	86	85	85	85
5	99	93	89	85	98	92	88	85	91	87	84	89	86	84	88	85	83	82	82	82
6	96	89	85	81	95	89	84	81	87	83	81	86	83	80	85	82	80	79	79	79
7	93	86	81	78	92	85	81	78	84	80	77	83	80	77	82	79	77	76	76	76
8	90	83	78	75	89	82	78	75	81	77	75	80	77	74	79	76	74	73	73	73
9	87	80	75	72	86	79	75	72	78	75	72	78	74	72	77	74	71	70	70	70
10	84	77	72	70	83	77	72	69	76	72	69	75	72	69	75	71	69	68	68	68

AVERAGE LUMINANCE (cd/sqm):

	0°
0°	486781
5°	483270
10°	470621
15°	420388
20°	278741
25°	104425
30°	27928
35°	10922
40°	3922
45°	1861
50°	580
55°	268
60°	132
65°	156
70°	0
75°	0
80°	0
85°	0

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 0°
 Vertical Angle: 45°
 Luminance: 1861 cd/sqm



TEST NUMBER: P1267084
 CATALOG NUMBER: P3A09R409735DE010 E3D1LI

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	207.2	21.7
10°-20°	490.7	51.4
20°-30°	222.5	23.3
30°-40°	28.8	3.0
40°-50°	5.0	0.5
50°-60°	0.6	0.1
60°-70°	0.2	0.0
70°-80°	0.0	0.0
80°-90°	0.0	0.0
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	920.4	96.4
0°-40°	949.2	99.4
0°-60°	954.8	100.0
0°-90°	955.0	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	955.0	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	2220	
5°	2196	207
15°	1852	491
25°	432	223
35°	41	29
45°	6	5
55°	1	1
65°	0	0
75°	0	0
85°	0	0
90°	0	



TEST NUMBER: P1267084
CATALOG NUMBER: P3A09R409735DE010 E3D1LI

CANDELA DISTRIBUTION (FULL):

0°	
0°	2219.9
1°	2218.6
2°	2215.2
3°	2210.2
4°	2203.9
5°	2195.5
6°	2185.8
7°	2173.8
8°	2159.1
9°	2139.0
10°	2113.6
11°	2083.8
12°	2044.1
13°	1994.9
14°	1930.7
15°	1851.8
16°	1751.2
17°	1636.5
18°	1498.8
19°	1353.3
20°	1194.5
21°	1035.7
22°	879.3
23°	723.5
24°	570.4
25°	431.6
26°	319.6
27°	234.0
28°	175.9
29°	136.7
30°	110.3
31°	91.3
32°	76.2
32.5°	69.5
33°	62.9
34°	51.2
35°	40.8
36°	32.1
37°	25.4
37.5°	22.7
38°	20.1
39°	16.7
40°	13.7
42.5°	9.0
45°	6.0



TEST NUMBER: P1267084
CATALOG NUMBER: P3A09R409735DE010 E3D1LI

CANDELA DISTRIBUTION (continued):

	0°
47.5°	3.7
50°	1.7
52.5°	0.7
55°	0.7
57.5°	0.3
60°	0.3
62.5°	0.3
65°	0.3
67.5°	0.0
70°	0.0
72.5°	0.0
75°	0.0
77.5°	0.0
80°	0.0
82.5°	0.0
85°	0.0
87.5°	0.0
90°	0.0

(END OF REPORT)