

Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for
Cooper Lighting Solutions

Brand: IRiS

Report Number: P1267088

Luminaire Tested: P3A09R409735DE010 E3DL1GPH

Issue Date: 1/30/2026

Test Information

Test Method: LM-79-2019
Report Number: P1267088
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2601-647-23)
Test Lab: INNOVATION CENTER
Issue Date: 1/30/2026
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: IRiS
Catalog Number: P3A09R409735DE010 E3DL1GPH
Description: 3in Adjustable LED luminaire with, R40 optic, 3500K CCT AND, 97CRI , E3DL1GPH TRIM
Light Source: -
Ballast/Driver: -

Summary


Lumens per Lamp: N/A
Luminaire Lumens: 389.0 lumens
Efficiency: N/A
Efficacy: 35.0 lumens/watt
Spacing Criteria (0/90/45): 0.65 / 0.65 / 0.63
Luminous Opening: Circular (Dia: 0.25' x H: 0')
CIE Type: Direct

Input Watts (W): 11.1
Input Voltage (V): NR
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT

TEST NUMBER: P1267088

CATALOG NUMBER: P3A09R409735DE010 E3DL1GPH

Luminous Intensity Polar Plot

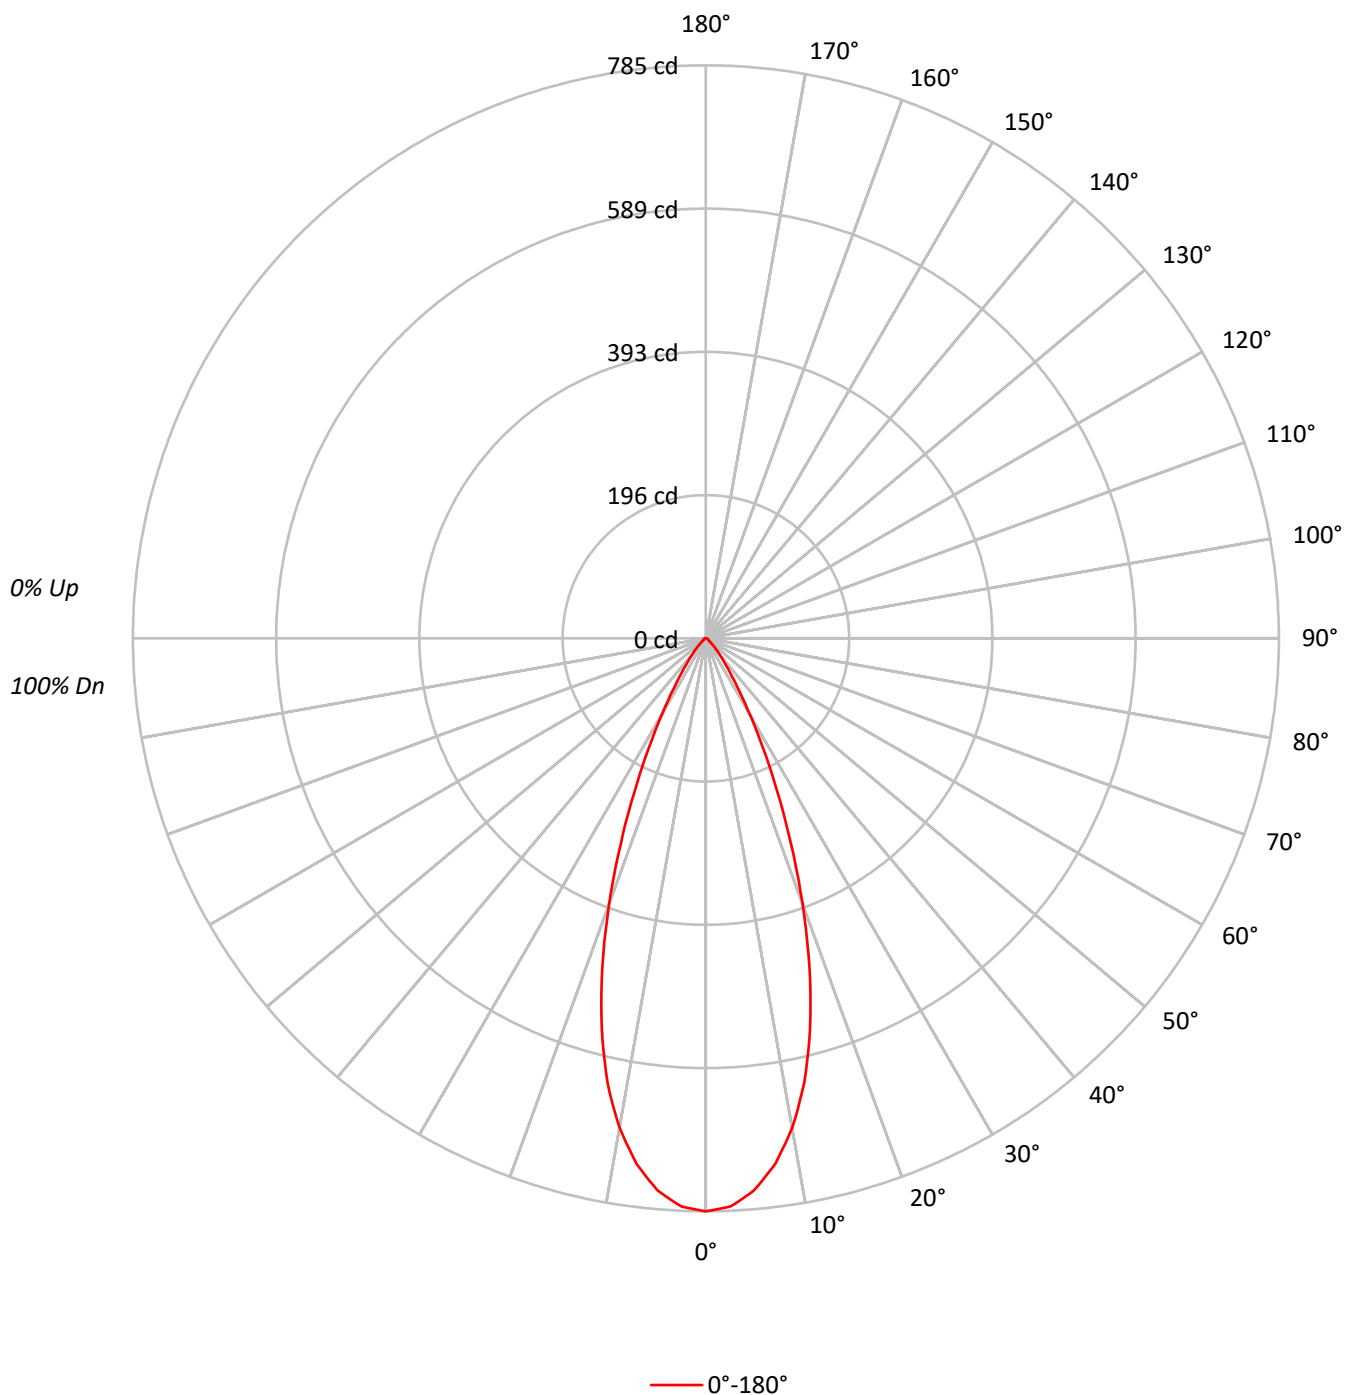

TEST NUMBER: P1267088

CATALOG NUMBER: P3A09R409735DE010 E3DL1GPH

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20
RC	80				70				50				30				10
RW	70	50	30	10	70	50	30	10	50	30	10		50	30	10		50
RCR																	
0	119	119	119	119	116	116	116	116	111	111	111		106	106	106		102
1	114	111	109	107	112	109	107	105	105	104	102		102	100	99		98
2	109	105	101	98	107	103	100	97	100	97	95		97	95	93		94
3	104	99	94	91	102	97	93	90	95	91	88		92	89	87		90
4	100	93	88	85	98	92	88	84	90	86	83		88	85	82		86
5	96	88	83	79	94	88	83	79	86	82	78		84	81	78		83
6	92	84	79	75	91	83	78	75	82	78	74		81	77	74		79
7	88	80	75	71	87	79	74	71	78	74	71		77	73	70		76
8	85	76	71	68	84	76	71	67	75	70	67		74	70	67		73
9	82	73	68	64	81	73	68	64	72	67	64		71	67	64		70
10	78	70	65	62	78	70	65	61	69	64	61		68	64	61		67

AVERAGE LUMINANCE (cd/sqm):

	0°
0°	172135
5°	167136
10°	151656
15°	125290
20°	90378
25°	55915
30°	30258
35°	15633
40°	8502
45°	4776
50°	2388
55°	1797
60°	1623
65°	1557
70°	1475
75°	1440
80°	1263
85°	755

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 0°

Vertical Angle: 45°

Luminance: 4776 cd/sqm

TEST NUMBER: P1267088

CATALOG NUMBER: P3A09R409735DE010 E3DL1GPH

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	70.0	18.0
10°-20°	150.3	38.6
20°-30°	107.3	27.6
30°-40°	39.5	10.1
40°-50°	12.5	3.2
50°-60°	4.3	1.1
60°-70°	3.0	0.8
70°-80°	1.8	0.5
80°-90°	0.5	0.1
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	327.5	84.2
0°-40°	367.0	94.3
0°-60°	383.8	98.7
0°-90°	389.0	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	389.0	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	785	
5°	759	70
15°	552	150
25°	231	107
35°	58	39
45°	15	12
55°	5	4
65°	3	3
75°	2	2
85°	0	0
90°	0	

TEST NUMBER: P1267088

CATALOG NUMBER: P3A09R409735DE010 E3DL1GPH

CANDELA DISTRIBUTION (FULL):

0°	
0°	785.0
2.5°	779.0
5°	759.3
7.5°	726.5
10°	681.1
12.5°	623.4
15°	551.9
17.5°	471.8
20°	387.3
22.5°	304.2
25°	231.1
27.5°	169.6
30°	119.5
32.5°	83.8
35°	58.4
37.5°	41.4
40°	29.7
42.5°	21.4
45°	15.4
47.5°	10.4
50°	7.0
52.5°	5.0
55°	4.7
57.5°	4.3
60°	3.7
62.5°	3.3
65°	3.0
67.5°	2.7
70°	2.3
72.5°	2.0
75°	1.7
77.5°	1.3
80°	1.0
82.5°	0.7
85°	0.3
87.5°	0.3
90°	0.0

(END OF REPORT)