

Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for
Cooper Lighting Solutions

Brand: IRiS

Report Number: P1269829

Luminaire Tested: P3A13R309740DE010 E3DLD1WMH

Issue Date: 1/30/2026

Test Information

Test Method: LM-79-2019
Report Number: P1269829
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2601-647-14)
Test Lab: INNOVATION CENTER
Issue Date: 1/30/2026
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: IRiS
Catalog Number: P3A13R309740DE010 E3DLD1WMH
Description: 3in Adjustable LED luminaire with, R30 optic, 4000K CCT AND, 97CRI , E3DLD1WMH TRIM
Light Source: -
Ballast/Driver: -

Summary


Lumens per Lamp: N/A
Luminaire Lumens: 767.0 lumens
Efficiency: N/A
Efficacy: 52.5 lumens/watt
Spacing Criteria (0/90/45): 0.78 / 0.78 / 0.85
Luminous Opening: Circular (Dia: 0.25' x H: 0')
CIE Type: Direct

Input Watts (W): 14.6
Input Voltage (V): NR
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT

TEST NUMBER: P1269829

CATALOG NUMBER: P3A13R309740DE010 E3DLD1WMH

Luminous Intensity Polar Plot

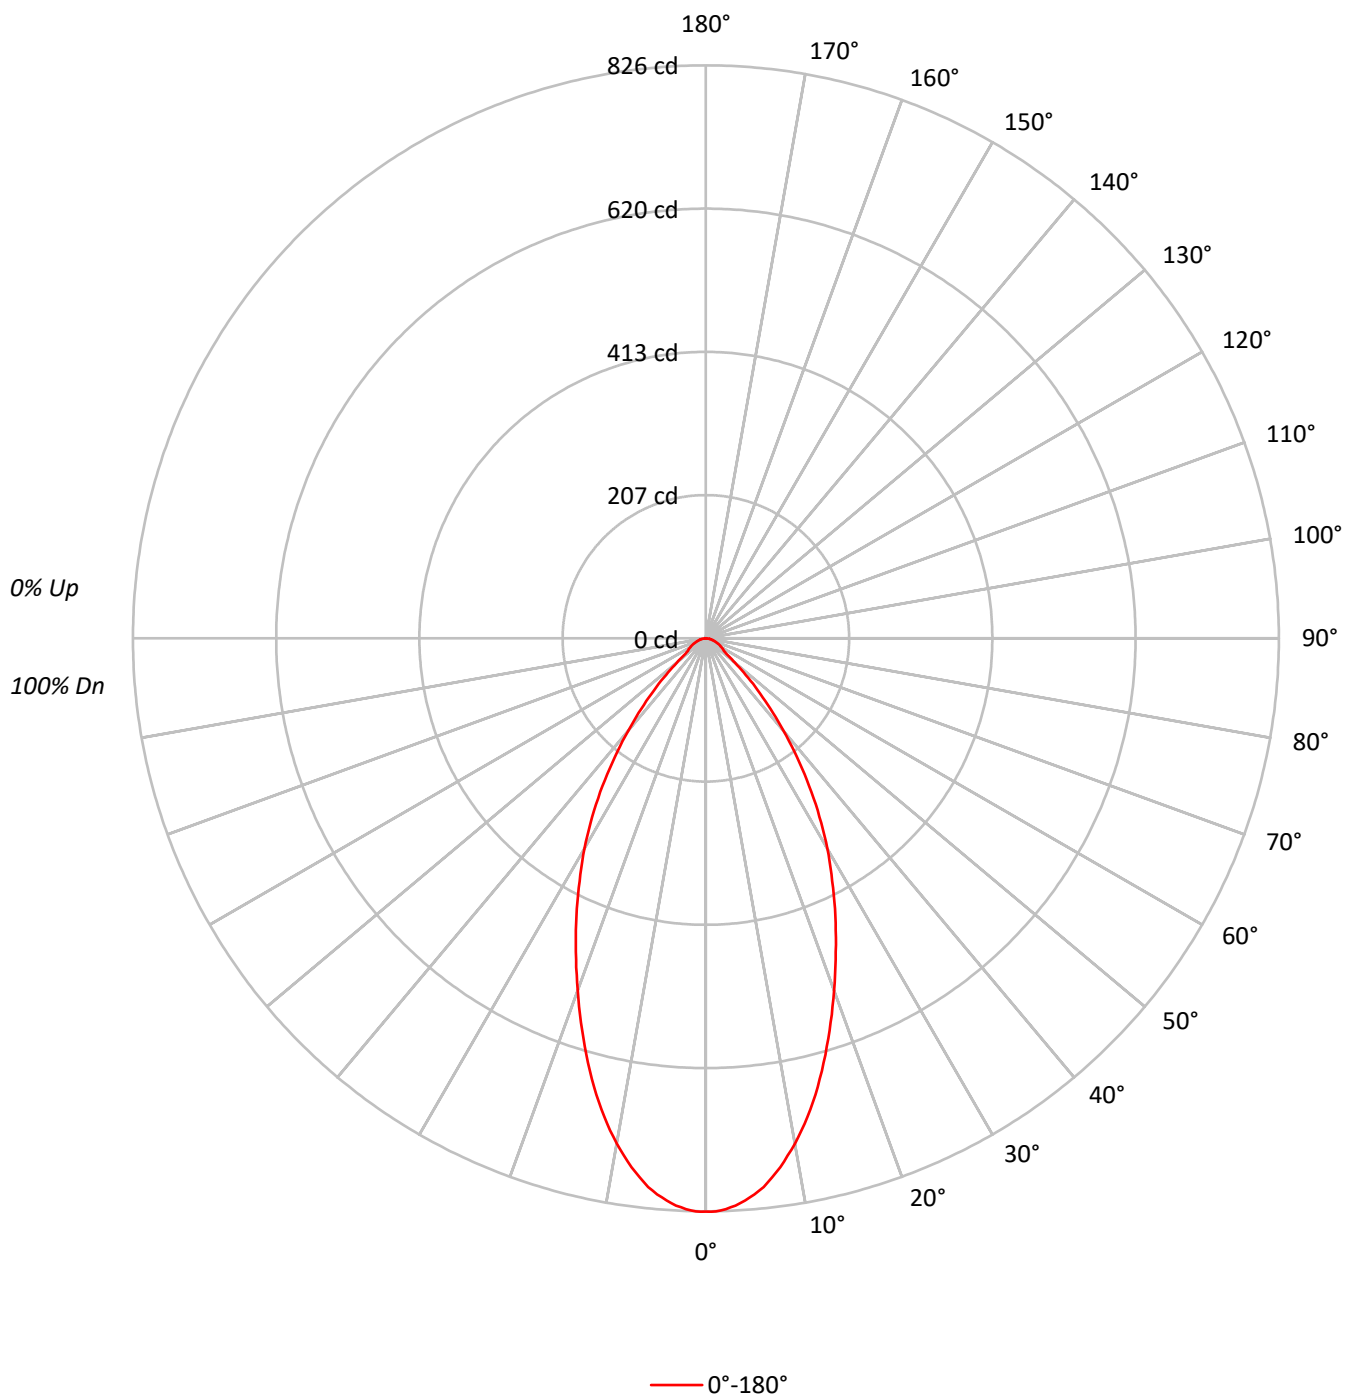

TEST NUMBER: P1269829

CATALOG NUMBER: P3A13R309740DE010 E3DLD1WMH

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20
RC	80				70				50				30				10
RW	70	50	30	10	70	50	30	10	50	30	10		50	30	10		50
RCR																	
0	119	119	119	119	116	116	116	116	111	111	111		106	106	106		102
1	112	109	106	104	110	107	105	102	103	101	99		99	98	96		96
2	106	100	96	92	104	99	94	91	95	92	89		92	89	87		89
3	100	92	87	82	98	91	86	82	88	84	80		86	82	79		84
4	94	85	79	74	92	84	79	74	82	77	73		80	76	72		78
5	89	79	73	68	87	78	72	68	76	71	67		75	70	66		73
6	84	74	67	62	82	73	67	62	71	66	62		70	65	61		69
7	79	69	62	58	78	68	62	58	67	61	57		66	61	57		65
8	75	65	58	54	74	64	58	53	63	57	53		62	57	53		61
9	71	61	54	50	70	60	54	50	59	54	50		58	53	50		57
10	68	57	51	47	67	57	51	47	56	50	47		55	50	46		54

AVERAGE LUMINANCE (cd/sqm):

	0°
0°	181214
5°	177129
10°	164726
15°	146584
20°	126058
25°	106796
30°	88647
35°	69546
40°	49836
45°	32686
50°	18626
55°	12234
60°	11578
65°	10740
70°	9681
75°	8811
80°	8334
85°	7045

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 0°

Vertical Angle: 45°

Luminance: 32686 cd/sqm

TEST NUMBER: P1269829

CATALOG NUMBER: P3A13R309740DE010 E3DLD1WMH

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	74.7	9.7
10°-20°	179.5	23.4
20°-30°	202.3	26.4
30°-40°	161.5	21.1
40°-50°	83.0	10.8
50°-60°	31.3	4.1
60°-70°	20.5	2.7
70°-80°	11.1	1.4
80°-90°	3.2	0.4
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	456.5	59.5
0°-40°	618.0	80.6
0°-60°	732.3	95.5
0°-90°	767.0	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	767.0	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	826	
5°	805	75
15°	646	179
25°	441	202
35°	260	162
45°	105	83
55°	32	31
65°	21	20
75°	10	11
85°	3	3
90°	0	

TEST NUMBER: P1269829

CATALOG NUMBER: P3A13R309740DE010 E3DLD1WMH

CANDELA DISTRIBUTION (FULL):

0°	
0°	826.4
1°	826.4
2°	823.5
3°	818.8
4°	812.2
5°	804.7
6°	795.3
7°	783.1
8°	769.9
9°	754.8
10°	739.8
11°	722.8
12°	704.9
13°	686.1
14°	666.4
15°	645.7
17.5°	592.9
20°	540.2
22.5°	489.4
25°	441.4
27.5°	394.4
30°	350.1
32.5°	304.9
35°	259.8
37.5°	215.5
40°	174.1
42.5°	137.4
45°	105.4
47.5°	78.1
50°	54.6
52.5°	38.6
55°	32.0
57.5°	29.2
60°	26.4
62.5°	23.5
65°	20.7
67.5°	17.9
70°	15.1
72.5°	12.2
75°	10.4
77.5°	8.5
80°	6.6
82.5°	4.7
85°	2.8
87.5°	0.9



TEST NUMBER: P1269829

CATALOG NUMBER: P3A13R309740DE010 E3DLD1WMH

CANDELA DISTRIBUTION (continued):



(END OF REPORT)