

Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for
Cooper Lighting Solutions

Brand: IRiS

Report Number: P1269841

Luminaire Tested: P3A13R359740DE010 E3CB1MW

Issue Date: 1/30/2026

Test Information

Test Method: LM-79-2019
Report Number: P1269841
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2601-647-20)
Test Lab: INNOVATION CENTER
Issue Date: 1/30/2026
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: IRiS
Catalog Number: P3A13R359740DE010 E3CB1MW
Description: 3in Adjustable LED luminaire with, R35 optic, 4000K CCT AND, 97CRI , E3CB1MW TRIM
Light Source: -
Ballast/Driver: -

Summary


Lumens per Lamp: N/A
Luminaire Lumens: 1196.0 lumens
Efficiency: N/A
Efficacy: 81.9 lumens/watt
Spacing Criteria (0/90/45): 0.58 / 0.58 / 0.52
Luminous Opening: Circular (Dia: 0.25' x H: 0')
CIE Type: Direct

Input Watts (W): 14.6
Input Voltage (V): NR
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT

TEST NUMBER: P1269841

CATALOG NUMBER: P3A13R359740DE010 E3CB1MW

Luminous Intensity Polar Plot

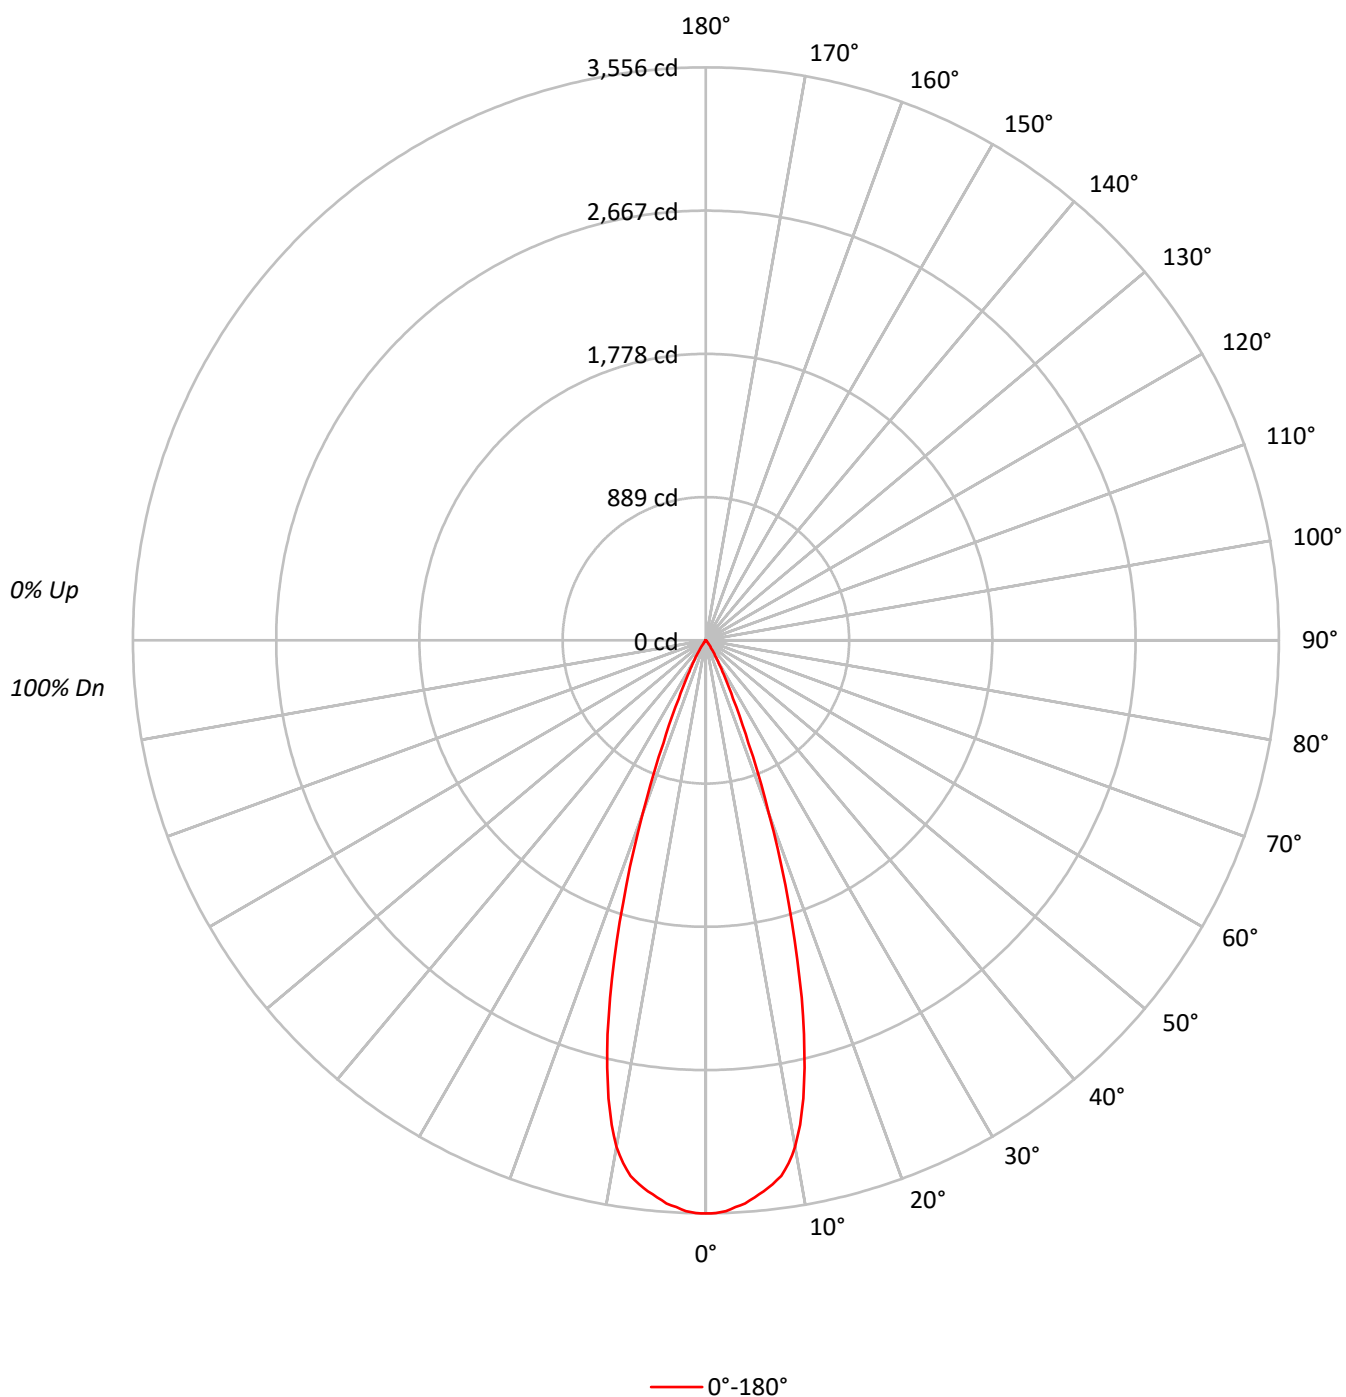

TEST NUMBER: P1269841

CATALOG NUMBER: P3A13R359740DE010 E3CB1MW

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20
RC	80				70				50				30				10
RW	70	50	30	10	70	50	30	10	50	30	10		50	30	10		50
RCR																	
0	119	119	119	119	116	116	116	116	111	111	111		106	106	106		102
1	115	113	111	109	112	110	109	107	106	105	104		103	102	101		99
2	111	107	104	101	109	105	103	100	102	100	98		99	98	96		97
3	107	102	98	95	105	101	97	95	98	96	93		96	94	92		94
4	104	98	94	91	102	97	93	90	95	92	89		93	90	88		91
5	100	94	90	87	99	93	89	86	92	88	86		90	87	85		89
6	97	91	86	83	96	90	86	83	89	85	82		87	84	82		86
7	94	87	83	80	93	87	83	80	86	82	79		85	81	79		84
8	91	84	80	77	90	84	80	77	83	79	77		82	79	76		81
9	89	82	77	74	88	81	77	74	80	77	74		80	76	74		79
10	86	79	75	72	85	79	75	72	78	74	72		77	74	72		77

AVERAGE LUMINANCE (cd/sqm):

	0°
0°	779872
5°	763987
10°	710742
15°	521070
20°	266817
25°	96175
30°	37449
35°	13117
40°	5382
45°	1458
50°	1296
55°	1453
60°	1228
65°	986
70°	1218
75°	1610
80°	1137
85°	0

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 0°

Vertical Angle: 75°

Luminance: 1610 cd/sqm

TEST NUMBER: P1269841

CATALOG NUMBER: P3A13R359740DE010 E3CB1MW

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	323.6	27.1
10°-20°	607.1	50.8
20°-30°	214.9	18.0
30°-40°	37.6	3.1
40°-50°	5.5	0.5
50°-60°	3.1	0.3
60°-70°	2.2	0.2
70°-80°	1.6	0.1
80°-90°	0.4	0.0
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	1145.6	95.8
0°-40°	1183.2	98.9
0°-60°	1191.8	99.6
0°-90°	1196.0	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	1196.0	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	3556	
5°	3471	324
15°	2295	607
25°	398	215
35°	49	38
45°	5	6
55°	4	3
65°	2	2
75°	2	2
85°	0	0
90°	0	

TEST NUMBER: P1269841

CATALOG NUMBER: P3A13R359740DE010 E3CB1MW

CANDELA DISTRIBUTION (FULL):

0°	
0°	3556.5
1°	3555.6
2°	3544.3
3°	3522.6
4°	3502.8
5°	3470.8
6°	3437.8
7°	3401.1
8°	3355.9
9°	3285.2
10°	3192.0
11°	3063.0
12°	2907.5
13°	2722.9
14°	2519.5
15°	2295.3
17.5°	1709.5
20°	1143.4
22.5°	689.4
25°	397.5
27.5°	237.4
30°	147.9
32.5°	85.7
35°	49.0
37.5°	31.1
40°	18.8
42.5°	9.4
45°	4.7
47.5°	3.8
50°	3.8
52.5°	3.8
55°	3.8
57.5°	2.8
60°	2.8
62.5°	2.8
65°	1.9
67.5°	1.9
70°	1.9
72.5°	1.9
75°	1.9
77.5°	0.9
80°	0.9
82.5°	0.9
85°	0.0
87.5°	0.0



TEST NUMBER: P1269841

CATALOG NUMBER: P3A13R359740DE010 E3CB1MW

CANDELA DISTRIBUTION (continued):

0°
90° | 0.0

(END OF REPORT)