

Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for
Cooper Lighting Solutions

Brand: IRiS

Report Number: P1269964

Luminaire Tested: P3A13R559740DE010 E3DL1MW

Issue Date: 1/30/2026

Test Information

Test Method: LM-79-2019
Report Number: P1269964
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2601-647-35)
Test Lab: INNOVATION CENTER
Issue Date: 1/30/2026
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: IRiS
Catalog Number: P3A13R559740DE010 E3DL1MW
Description: 3in Adjustable LED luminaire with, R55 optic, 4000K CCT AND, 97CRI , E3DL1MW TRIM
Light Source: -
Ballast/Driver: -

Summary


Lumens per Lamp: N/A
Luminaire Lumens: 1026.0 lumens
Efficiency: N/A
Efficacy: 70.3 lumens/watt
Spacing Criteria (0/90/45): 0.83 / 0.83 / 0.81
Luminous Opening: Circular (Dia: 0.25' x H: 0')
CIE Type: Direct

Input Watts (W): 14.6
Input Voltage (V): NR
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT

TEST NUMBER: P1269964

CATALOG NUMBER: P3A13R559740DE010 E3DL1MW

Luminous Intensity Polar Plot

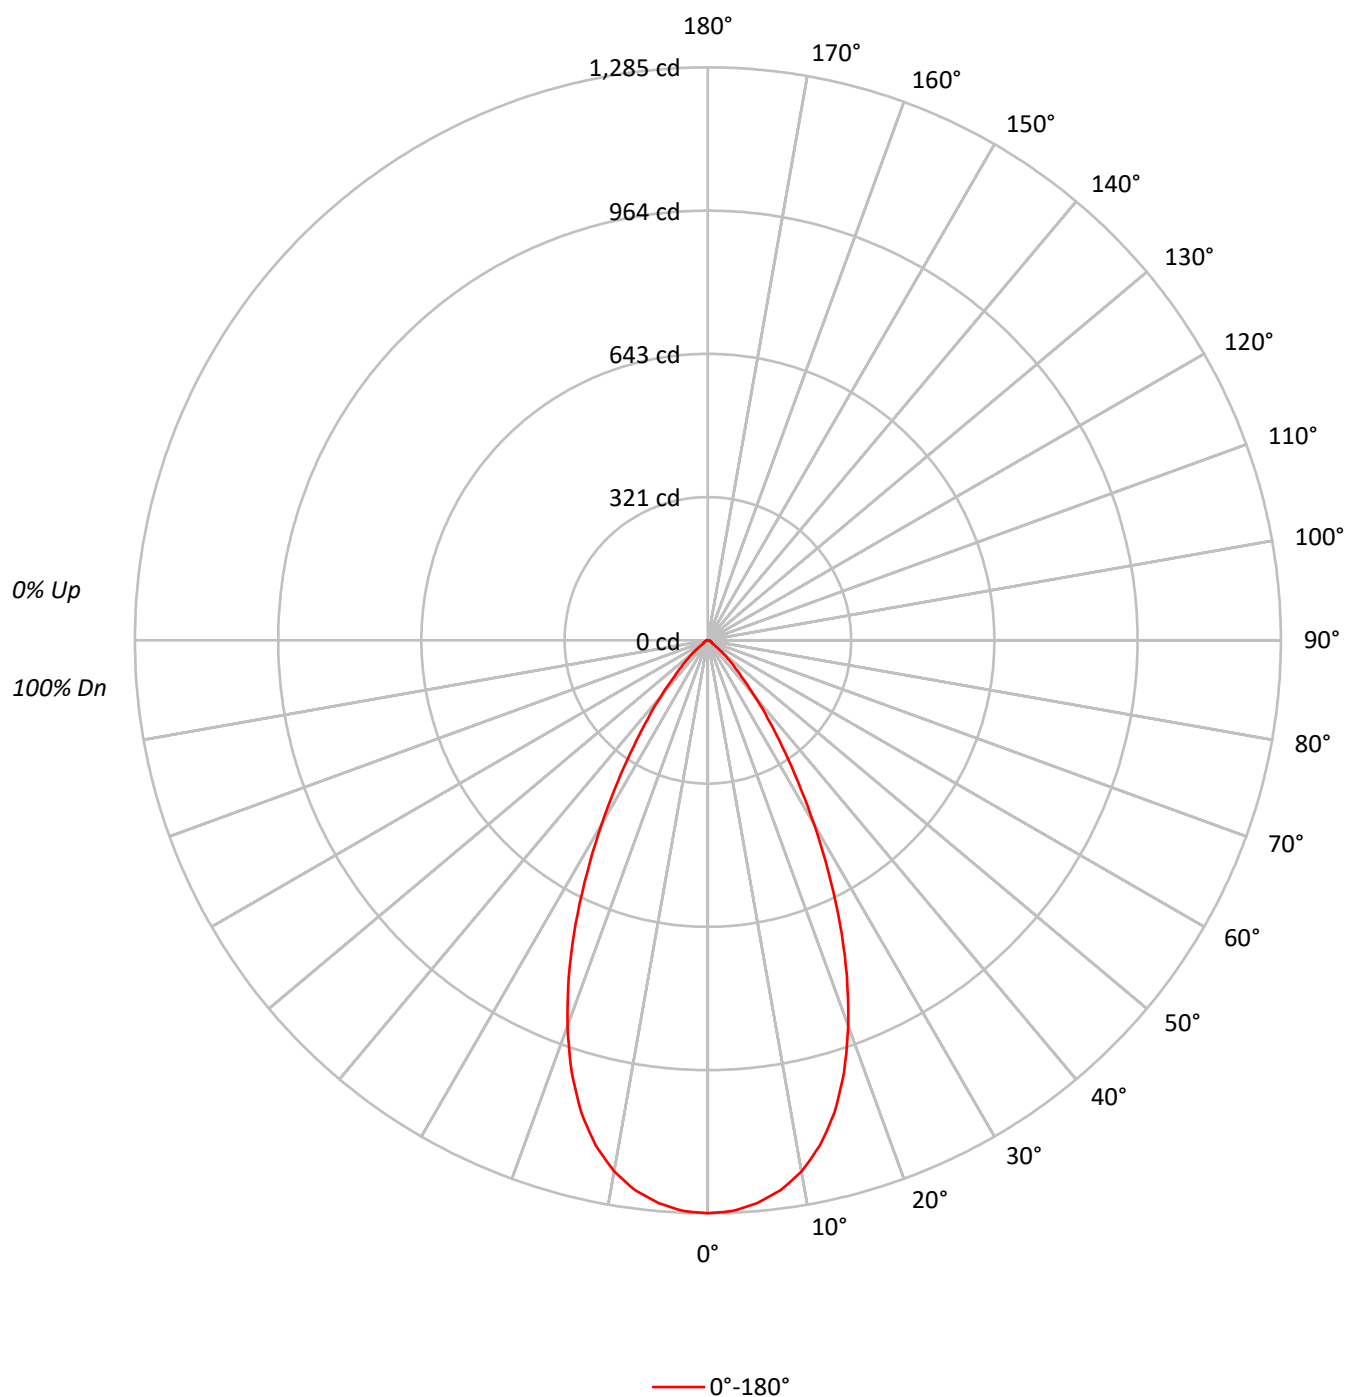



TEST NUMBER: P1269964

CATALOG NUMBER: P3A13R559740DE010 E3DL1MW

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20			
RC	80				70				50				30				10			0
RW	70	50	30	10	70	50	30	10	50	30	10		50	30	10		50	30	10	0
RCR																				
0	119	119	119	119	116	116	116	116	111	111	111		106	106	106		102	102	102	100
1	113	111	108	106	111	108	106	104	104	103	101		101	99	98		97	96	95	93
2	108	103	99	95	106	101	97	94	98	95	92		95	92	90		92	90	88	87
3	102	96	91	87	100	94	90	86	92	88	85		89	86	84		87	85	82	81
4	97	90	84	80	95	89	83	79	86	82	78		84	81	78		82	79	77	75
5	92	84	78	74	91	83	78	74	81	77	73		80	76	72		78	75	72	70
6	88	79	73	69	86	78	73	68	77	72	68		75	71	68		74	70	67	66
7	84	74	68	64	82	74	68	64	72	67	64		71	67	63		70	66	63	62
8	80	70	64	60	78	70	64	60	69	63	60		67	63	60		67	62	59	58
9	76	66	61	57	75	66	60	56	65	60	56		64	59	56		63	59	56	55
10	73	63	57	53	72	62	57	53	62	57	53		61	56	53		60	56	53	52

AVERAGE LUMINANCE (cd/sqm):

	0°
0°	281732
5°	278868
10°	269311
15°	248946
20°	214802
25°	169655
30°	120348
35°	77604
40°	46602
45°	26266
50°	14123
55°	5046
60°	4561
65°	4410
70°	4231
75°	3982
80°	3536
85°	2264

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 0°

Vertical Angle: 45°

Luminance: 26266 cd/sqm

TEST NUMBER: P1269964

CATALOG NUMBER: P3A13R559740DE010 E3DL1MW

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	119.1	11.6
10°-20°	303.2	29.6
20°-30°	317.8	31.0
30°-40°	185.4	18.1
40°-50°	69.4	6.8
50°-60°	16.3	1.6
60°-70°	8.4	0.8
70°-80°	5.0	0.5
80°-90°	1.4	0.1
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	740.2	72.1
0°-40°	925.6	90.2
0°-60°	1011.3	98.6
0°-90°	1026.0	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	1026.0	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	1285	
5°	1267	119
15°	1097	303
25°	701	318
35°	290	185
45°	85	69
55°	13	16
65°	8	8
75°	5	5
85°	1	1
90°	0	

TEST NUMBER: P1269964

CATALOG NUMBER: P3A13R559740DE010 E3DL1MW

CANDELA DISTRIBUTION (FULL):

0°	
0°	1284.8
2.5°	1281.0
5°	1266.9
7.5°	1244.3
10°	1209.5
12.5°	1160.6
15°	1096.6
17.5°	1015.6
20°	920.5
22.5°	814.2
25°	701.2
27.5°	585.5
30°	475.3
32.5°	375.6
35°	289.9
37.5°	220.3
40°	162.8
42.5°	116.7
45°	84.7
47.5°	61.2
50°	41.4
52.5°	23.5
55°	13.2
57.5°	11.3
60°	10.4
62.5°	9.4
65°	8.5
67.5°	7.5
70°	6.6
72.5°	5.6
75°	4.7
77.5°	3.8
80°	2.8
82.5°	1.9
85°	0.9
87.5°	0.9
90°	0.0

(END OF REPORT)