

Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for
Cooper Lighting Solutions

Brand: IRiS

Report Number: P1426580

Luminaire Tested: P3A13RH9740DE010 E3HY1LI

Issue Date: 3/9/2026

Test Information

Test Method: LM-79-2019
Report Number: P1426580
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2601-658-1)
Test Lab: INNOVATION CENTER
Issue Date: 3/9/2026
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: IRiS
Catalog Number: P3A13RH9740DE010 E3HY1LI
Description: 3in Adjustable LED luminaire with, RH optic, 4000K CCT AND, 97CRI , E3HY1LI TRIM
Light Source: -
Ballast/Driver: -

Summary


Lumens per Lamp: N/A
Luminaire Lumens: 719.0 lumens
Efficiency: N/A
Efficacy: 49.2 lumens/watt
Spacing Criteria (0/90/45): 0.61 / 0.61 / 0.51
Luminous Opening: Circular (Dia: 0.25' x H: 0')
CIE Type: Direct

Input Watts (W): 14.6
Input Voltage (V): NR
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT

TEST NUMBER: P1426580

CATALOG NUMBER: P3A13RH9740DE010 E3HY1LI

Luminous Intensity Polar Plot

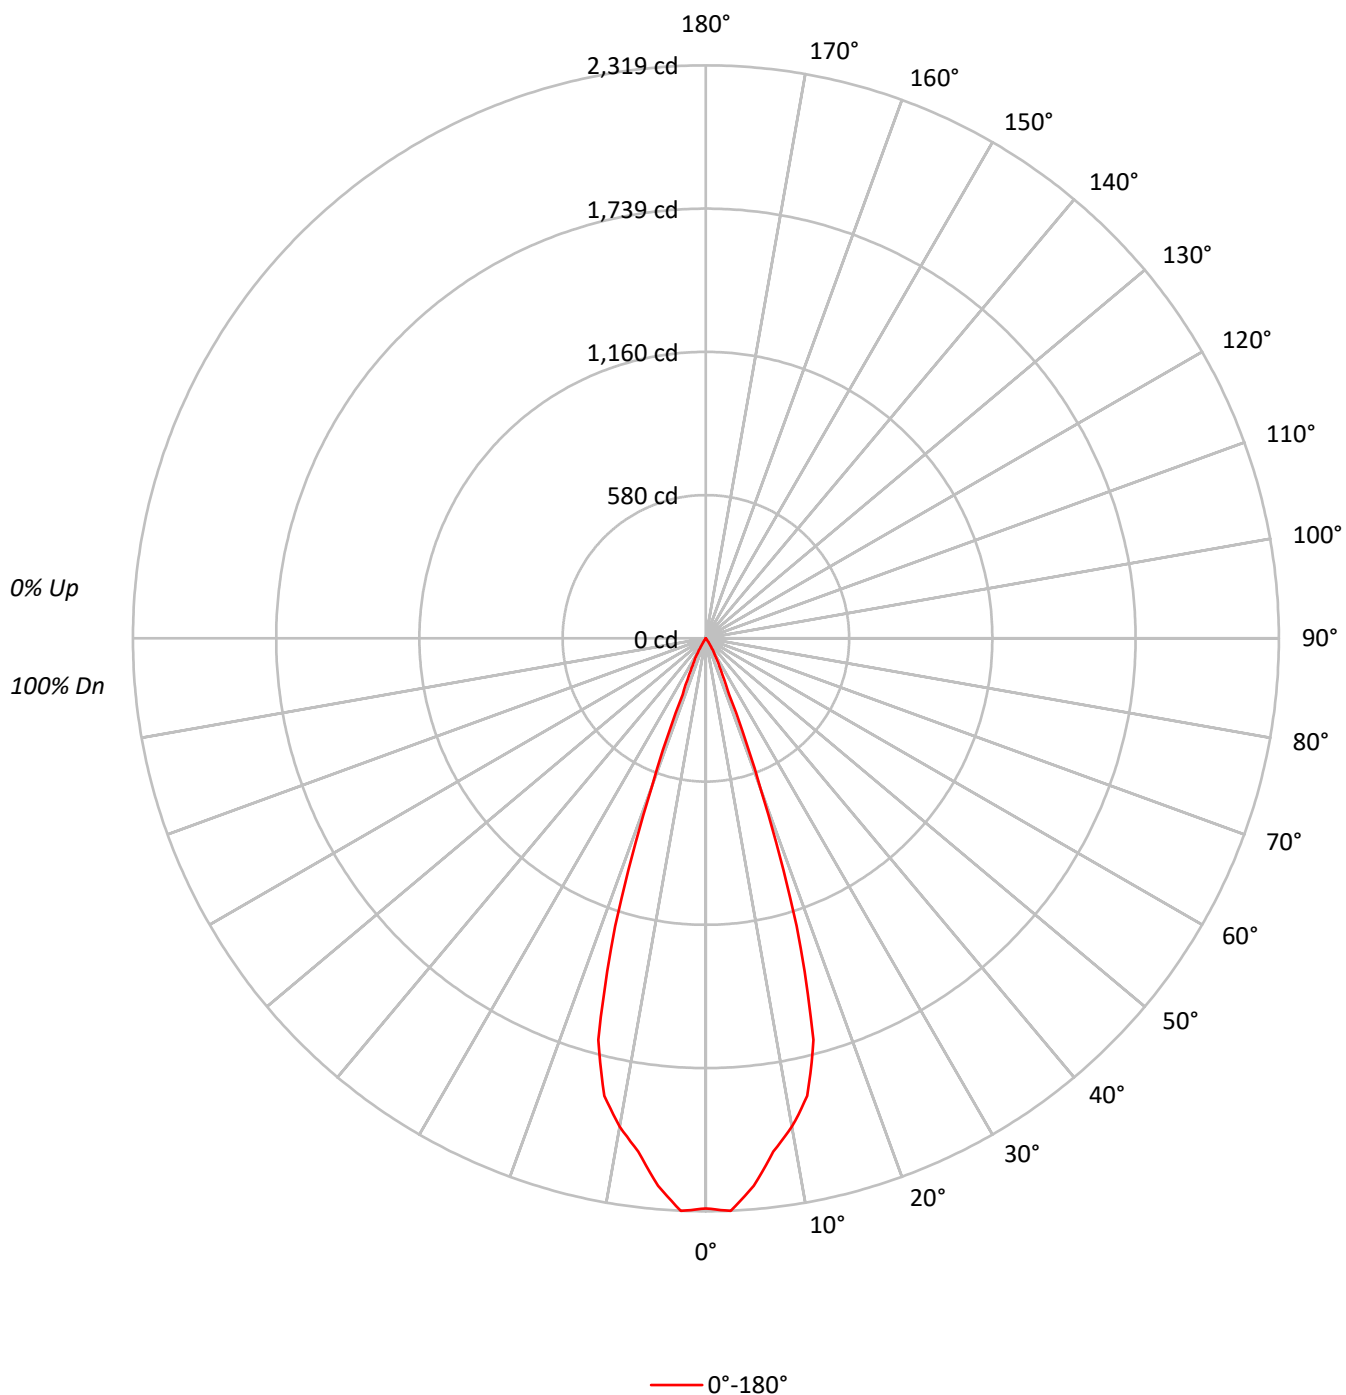



TEST NUMBER: P1426580

CATALOG NUMBER: P3A13RH9740DE010 E3HY1LI

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20			
RC	80				70				50				30				10			
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	0		
RCR																				
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100		
1	115	113	111	109	113	111	109	108	107	106	104	103	102	101	100	99	98	97		
2	111	108	105	102	109	106	103	101	103	101	99	100	98	97	98	96	95	94		
3	108	103	100	97	106	102	99	96	100	97	95	97	95	93	95	93	92	91		
4	105	99	95	92	103	98	95	92	96	93	91	94	92	90	93	91	89	88		
5	102	96	92	89	100	95	91	88	93	90	88	92	89	87	90	88	86	85		
6	99	92	88	85	97	92	88	85	90	87	85	89	86	84	88	86	84	82		
7	96	89	85	82	95	89	85	82	88	84	82	87	84	81	86	83	81	80		
8	93	87	83	80	92	86	82	80	85	82	79	84	81	79	84	81	79	78		
9	91	84	80	77	90	84	80	77	83	79	77	82	79	77	81	79	76	76		
10	88	82	78	75	87	81	77	75	81	77	75	80	77	75	79	76	74	73		

AVERAGE LUMINANCE (cd/sqm):

	0°
0°	505902
5°	489543
10°	446841
15°	381864
20°	149836
25°	34260
30°	15445
35°	1954
40°	0
45°	0
50°	0
55°	0
60°	0
65°	0
70°	0
75°	0
80°	0
85°	0

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 0°

Vertical Angle: 45°

Luminance: 0 cd/sqm

TEST NUMBER: P1426580

CATALOG NUMBER: P3A13RH9740DE010 E3HY1LI

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	204.5	28.4
10°-20°	414.4	57.6
20°-30°	90.2	12.5
30°-40°	9.8	1.4
40°-50°	0.0	0.0
50°-60°	0.0	0.0
60°-70°	0.0	0.0
70°-80°	0.0	0.0
80°-90°	0.0	0.0
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	709.2	98.6
0°-40°	719.0	100.0
0°-60°	719.0	100.0
0°-90°	719.0	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	719.0	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	2307	
5°	2224	205
15°	1682	414
25°	142	90
35°	7	10
45°	0	0
55°	0	0
65°	0	0
75°	0	0
85°	0	0
90°	0	

TEST NUMBER: P1426580

CATALOG NUMBER: P3A13RH9740DE010 E3HY1LI

CANDELA DISTRIBUTION (FULL):

0°	
0°	2307.1
2.5°	2319.3
5°	2224.0
7.5°	2094.7
10°	2006.8
12.5°	1896.9
15°	1682.1
17.5°	1220.7
20°	642.1
22.5°	246.6
25°	141.6
27.5°	95.2
30°	61.0
32.5°	26.9
35°	7.3
37.5°	2.4
40°	0.0
42.5°	0.0
45°	0.0
47.5°	0.0
50°	0.0
52.5°	0.0
55°	0.0
57.5°	0.0
60°	0.0
62.5°	0.0
65°	0.0
67.5°	0.0
70°	0.0
72.5°	0.0
75°	0.0
77.5°	0.0
80°	0.0
82.5°	0.0
85°	0.0
87.5°	0.0
90°	0.0

(END OF REPORT)