

Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for
Cooper Lighting Solutions

Brand: IRiS

Report Number: P1268695

Luminaire Tested: P3A02R409740DE010 E3DLP1WMH

Issue Date: 1/30/2026

Test Information

Test Method: LM-79-2019
Report Number: P1268695
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2601-647-21)
Test Lab: INNOVATION CENTER
Issue Date: 1/30/2026
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: IRiS
Catalog Number: P3A02R409740DE010 E3DLP1WMH
Description: 3in Adjustable LED luminaire with, R40 optic, 4000K CCT AND, 97CRI , E3DLP1WMH TRIM
Light Source: -
Ballast/Driver: -


Summary

Lumens per Lamp: N/A
Luminaire Lumens: 172.9 lumens
Efficiency: N/A
Efficacy: 48.0 lumens/watt
Spacing Criteria (0/90/45): 0.73 / 0.73 / 0.74
Luminous Opening: Circular (Dia: 0.25' x H: 0')
CIE Type: Direct

Input Watts (W): 3.6
Input Voltage (V): NR
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT

TEST NUMBER: P1268695
CATALOG NUMBER: P3A02R409740DE010 E3DLP1WMH

Luminous Intensity Polar Plot

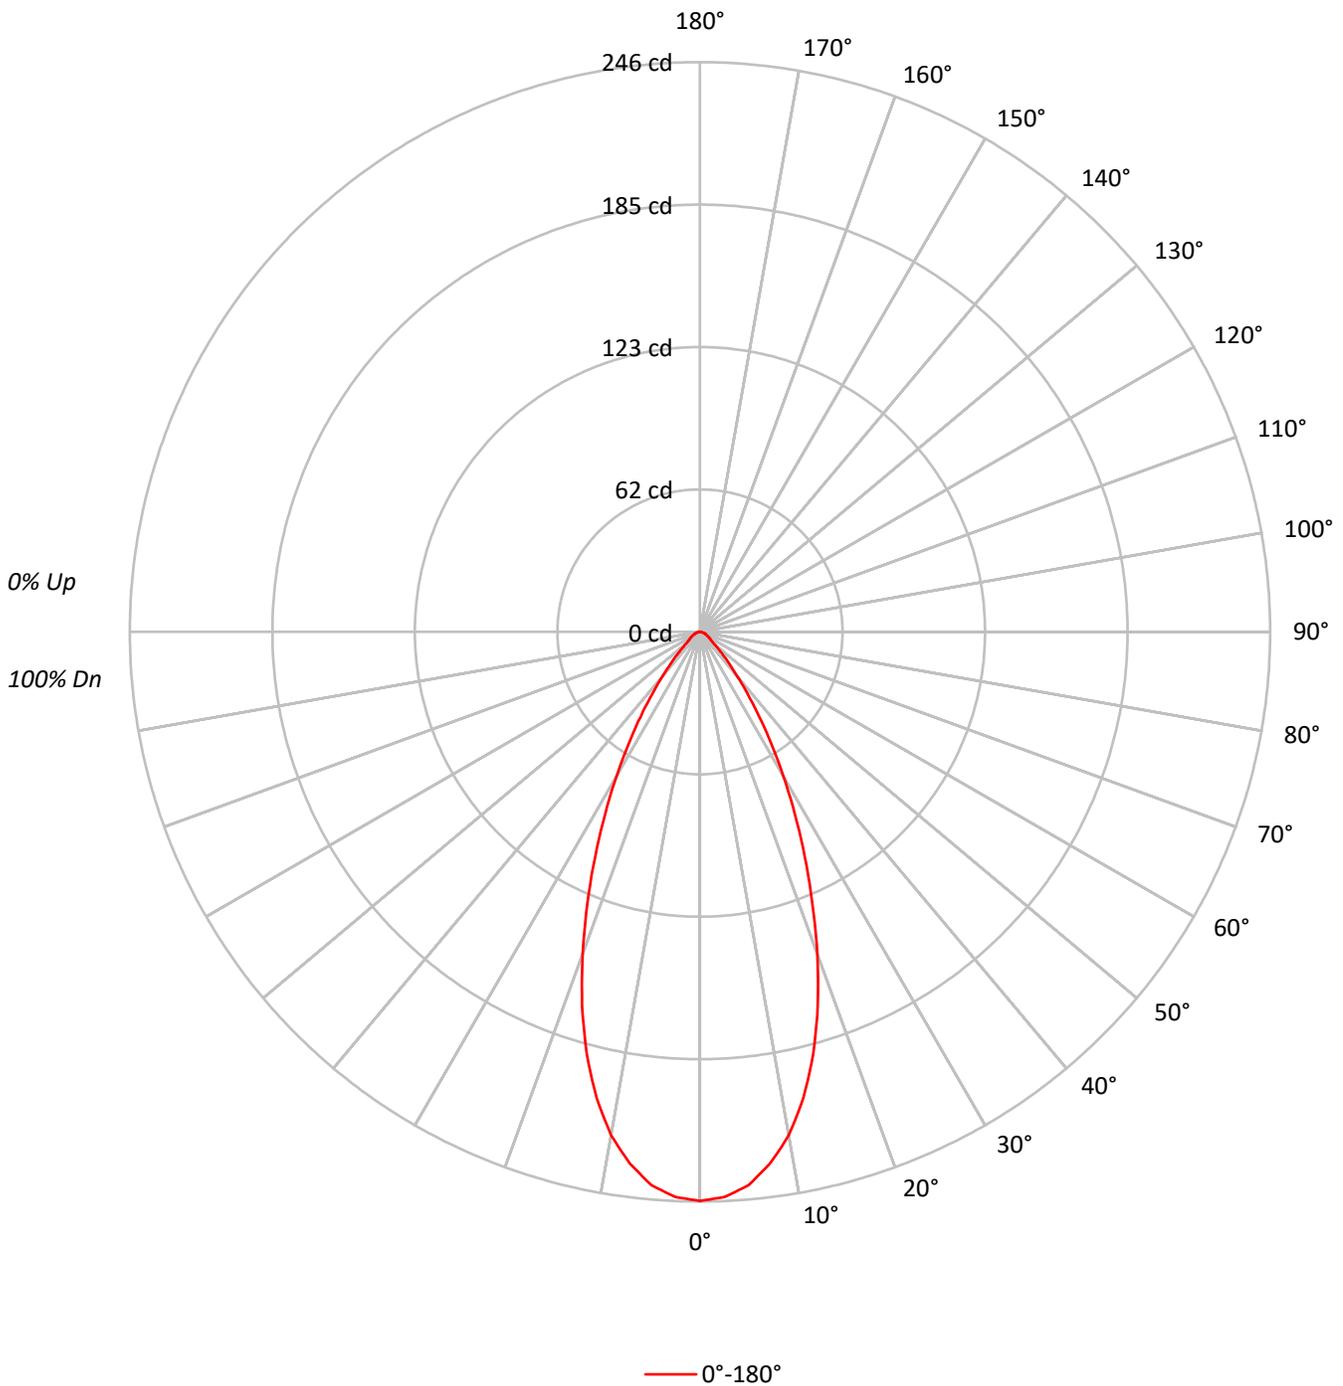



TEST NUMBER: P1268695
 CATALOG NUMBER: P3A02R409740DE010 E3DLP1WMH

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20				20
RC	80				70				50				30				10				0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																					
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100	100	100	100
1	113	110	108	105	111	108	106	104	104	102	100	100	99	97	97	96	95	93	93	93	93
2	107	102	98	95	105	101	97	94	97	94	91	94	92	89	92	89	88	86	86	86	86
3	102	95	90	86	100	94	89	85	91	87	84	89	85	83	86	84	81	80	80	80	80
4	97	89	83	79	95	88	83	79	86	81	78	84	80	77	82	79	76	74	74	74	74
5	92	83	77	73	90	82	77	73	81	76	72	79	75	72	77	74	71	69	69	69	69
6	87	78	72	68	86	78	72	68	76	71	67	75	70	67	73	70	66	65	65	65	65
7	83	74	68	64	82	73	68	64	72	67	63	71	66	63	70	66	62	61	61	61	61
8	79	70	64	60	78	69	64	60	68	63	59	67	63	59	66	62	59	58	58	58	58
9	76	66	60	56	75	66	60	56	65	60	56	64	59	56	63	59	56	54	54	54	54
10	72	63	57	53	71	62	57	53	62	57	53	61	56	53	60	56	53	51	51	51	51

AVERAGE LUMINANCE (cd/sqm):

	0°
0°	53877
5°	52784
10°	49142
15°	42838
20°	34513
25°	25864
30°	18180
35°	11912
40°	7214
45°	4311
50°	2559
55°	2064
60°	1842
65°	1608
70°	1539
75°	1186
80°	1137
85°	1258

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 0°
 Vertical Angle: 45°
 Luminance: 4311 cd/sqm



TEST NUMBER: P1268695
 CATALOG NUMBER: P3A02R409740DE010 E3DLP1WMH

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	22.3	12.9
10°-20°	52.0	30.0
20°-30°	49.0	28.3
30°-40°	28.3	16.4
40°-50°	11.3	6.5
50°-60°	5.0	2.9
60°-70°	3.1	1.8
70°-80°	1.6	0.9
80°-90°	0.5	0.3
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	123.2	71.2
0°-40°	151.5	87.6
0°-60°	167.7	97.0
0°-90°	172.9	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	172.9	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	246	
5°	240	22
15°	189	52
25°	107	49
35°	44	28
45°	14	11
55°	5	5
65°	3	3
75°	1	2
85°	0	1
90°	0	



TEST NUMBER: P1268695
CATALOG NUMBER: P3A02R409740DE010 E3DLP1WMH

CANDELA DISTRIBUTION (FULL):

	0°
0°	245.7
2.5°	244.2
5°	239.8
7.5°	231.5
10°	220.7
12.5°	206.1
15°	188.7
17.5°	169.1
20°	147.9
22.5°	126.7
25°	106.9
27.5°	88.6
30°	71.8
32.5°	57.2
35°	44.5
37.5°	33.7
40°	25.2
42.5°	18.8
45°	13.9
47.5°	10.1
50°	7.5
52.5°	6.1
55°	5.4
57.5°	4.9
60°	4.2
62.5°	3.5
65°	3.1
67.5°	2.6
70°	2.4
72.5°	1.9
75°	1.4
77.5°	1.2
80°	0.9
82.5°	0.7
85°	0.5
87.5°	0.2
90°	0.0

(END OF REPORT)