

Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for
Cooper Lighting Solutions

Brand: IRiS

Report Number: P1268720

Luminaire Tested: P3A02R459740DE010 E3DLP1WMH

Issue Date: 1/30/2026

Test Information

Test Method: LM-79-2019
Report Number: P1268720
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2601-647-25)
Test Lab: INNOVATION CENTER
Issue Date: 1/30/2026
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: IRiS
Catalog Number: P3A02R459740DE010 E3DLP1WMH
Description: 3in Adjustable LED luminaire with, R45 optic, 4000K CCT AND, 97CRI , E3DLP1WMH TRIM
Light Source: -
Ballast/Driver: -

Summary


Lumens per Lamp: N/A
Luminaire Lumens: 169.9 lumens
Efficiency: N/A
Efficacy: 47.2 lumens/watt
Spacing Criteria (0/90/45): 0.73 / 0.73 / 0.76
Luminous Opening: Circular (Dia: 0.25' x H: 0')
CIE Type: Direct

Input Watts (W): 3.6
Input Voltage (V): NR
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT

TEST NUMBER: P1268720

CATALOG NUMBER: P3A02R459740DE010 E3DLP1WMH

Luminous Intensity Polar Plot

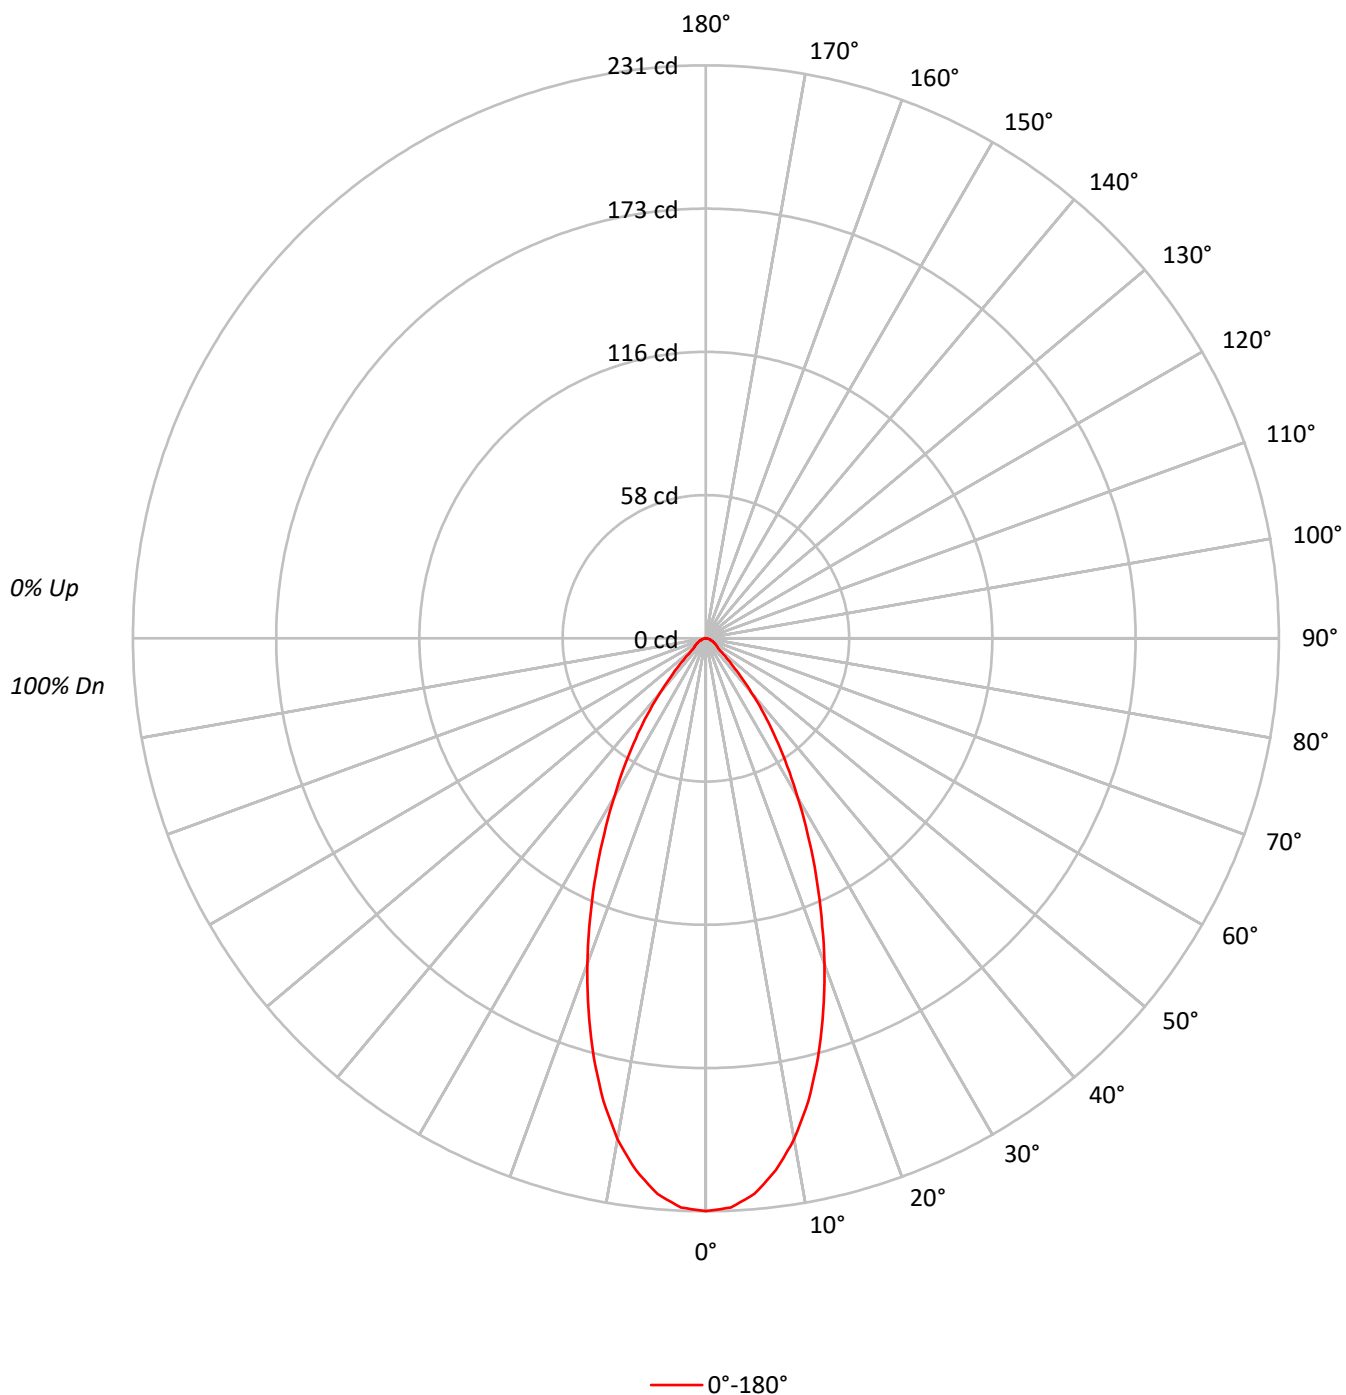

TEST NUMBER: P1268720

CATALOG NUMBER: P3A02R459740DE010 E3DLP1WMH

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20					20					20					20
RC	80				70					50					30					10
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10
RCR																				
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100		
1	113	110	108	105	111	108	106	103	104	102	100	100	99	97	97	96	94	93		
2	107	102	98	94	105	100	96	93	97	94	91	94	91	89	91	89	87	86		
3	102	95	90	85	100	93	89	85	91	87	83	88	85	82	86	83	81	79		
4	96	88	83	78	94	87	82	78	85	81	77	83	79	76	81	78	75	74		
5	91	83	77	72	90	82	76	72	80	75	71	78	74	71	77	73	70	69		
6	87	78	72	67	85	77	71	67	75	70	66	74	69	66	73	69	66	64		
7	83	73	67	63	81	72	67	63	71	66	62	70	65	62	69	65	62	60		
8	79	69	63	59	77	68	63	59	67	62	58	66	62	58	65	61	58	56		
9	75	65	59	55	74	65	59	55	64	59	55	63	58	55	62	58	55	53		
10	72	62	56	52	71	61	56	52	61	55	52	60	55	52	59	55	52	50		

AVERAGE LUMINANCE (cd/sqm):

	0°
0°	50632
5°	49483
10°	45646
15°	39682
20°	32600
25°	25380
30°	18737
35°	13170
40°	8215
45°	4466
50°	2422
55°	2064
60°	1842
65°	1608
70°	1346
75°	1356
80°	1137
85°	1258

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 0°
Vertical Angle: 45°
Luminance: 4466 cd/sqm

TEST NUMBER: P1268720

CATALOG NUMBER: P3A02R459740DE010 E3DLP1WMH

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	20.8	12.3
10°-20°	48.3	28.4
20°-30°	48.0	28.2
30°-40°	30.9	18.2
40°-50°	11.9	7.0
50°-60°	4.8	2.8
60°-70°	3.1	1.8
70°-80°	1.6	1.0
80°-90°	0.5	0.3
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	117.1	68.9
0°-40°	148.0	87.1
0°-60°	164.8	96.9
0°-90°	169.9	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	169.9	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	231	
5°	225	21
15°	175	48
25°	105	48
35°	49	31
45°	14	12
55°	5	5
65°	3	3
75°	2	2
85°	0	1
90°	0	

TEST NUMBER: P1268720

CATALOG NUMBER: P3A02R459740DE010 E3DLP1WMH

CANDELA DISTRIBUTION (FULL):

	0°
0°	230.9
2.5°	229.7
5°	224.8
7.5°	216.3
10°	205.0
12.5°	190.9
15°	174.8
17.5°	157.4
20°	139.7
22.5°	121.8
25°	104.9
27.5°	88.8
30°	74.0
32.5°	61.0
35°	49.2
37.5°	38.6
40°	28.7
42.5°	20.7
45°	14.4
47.5°	9.7
50°	7.1
52.5°	5.9
55°	5.4
57.5°	4.7
60°	4.2
62.5°	3.5
65°	3.1
67.5°	2.6
70°	2.1
72.5°	1.9
75°	1.6
77.5°	1.2
80°	0.9
82.5°	0.7
85°	0.5
87.5°	0.2
90°	0.0

(END OF REPORT)