

Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for
Cooper Lighting Solutions

Brand: IRiS

Report Number: P1268773

Luminaire Tested: P3A02R559740DE010 E3DLP1GPH

Issue Date: 1/30/2026

Test Information

Test Method: LM-79-2019
Report Number: P1268773
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2601-647-33)
Test Lab: INNOVATION CENTER
Issue Date: 1/30/2026
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: IRiS
Catalog Number: P3A02R559740DE010 E3DLP1GPH
Description: 3in Adjustable LED luminaire with, R55 optic, 4000K CCT AND, 97CRI , E3DLP1GPH TRIM
Light Source: -
Ballast/Driver: -

Summary


Lumens per Lamp: N/A
Luminaire Lumens: 84.0 lumens
Efficiency: N/A
Efficacy: 23.3 lumens/watt
Spacing Criteria (0/90/45): 0.77 / 0.77 / 0.8
Luminous Opening: Circular (Dia: 0.25' x H: 0')
CIE Type: Direct

Input Watts (W): 3.6
Input Voltage (V): NR
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT

TEST NUMBER: P1268773

CATALOG NUMBER: P3A02R559740DE010 E3DLP1GPH

Luminous Intensity Polar Plot

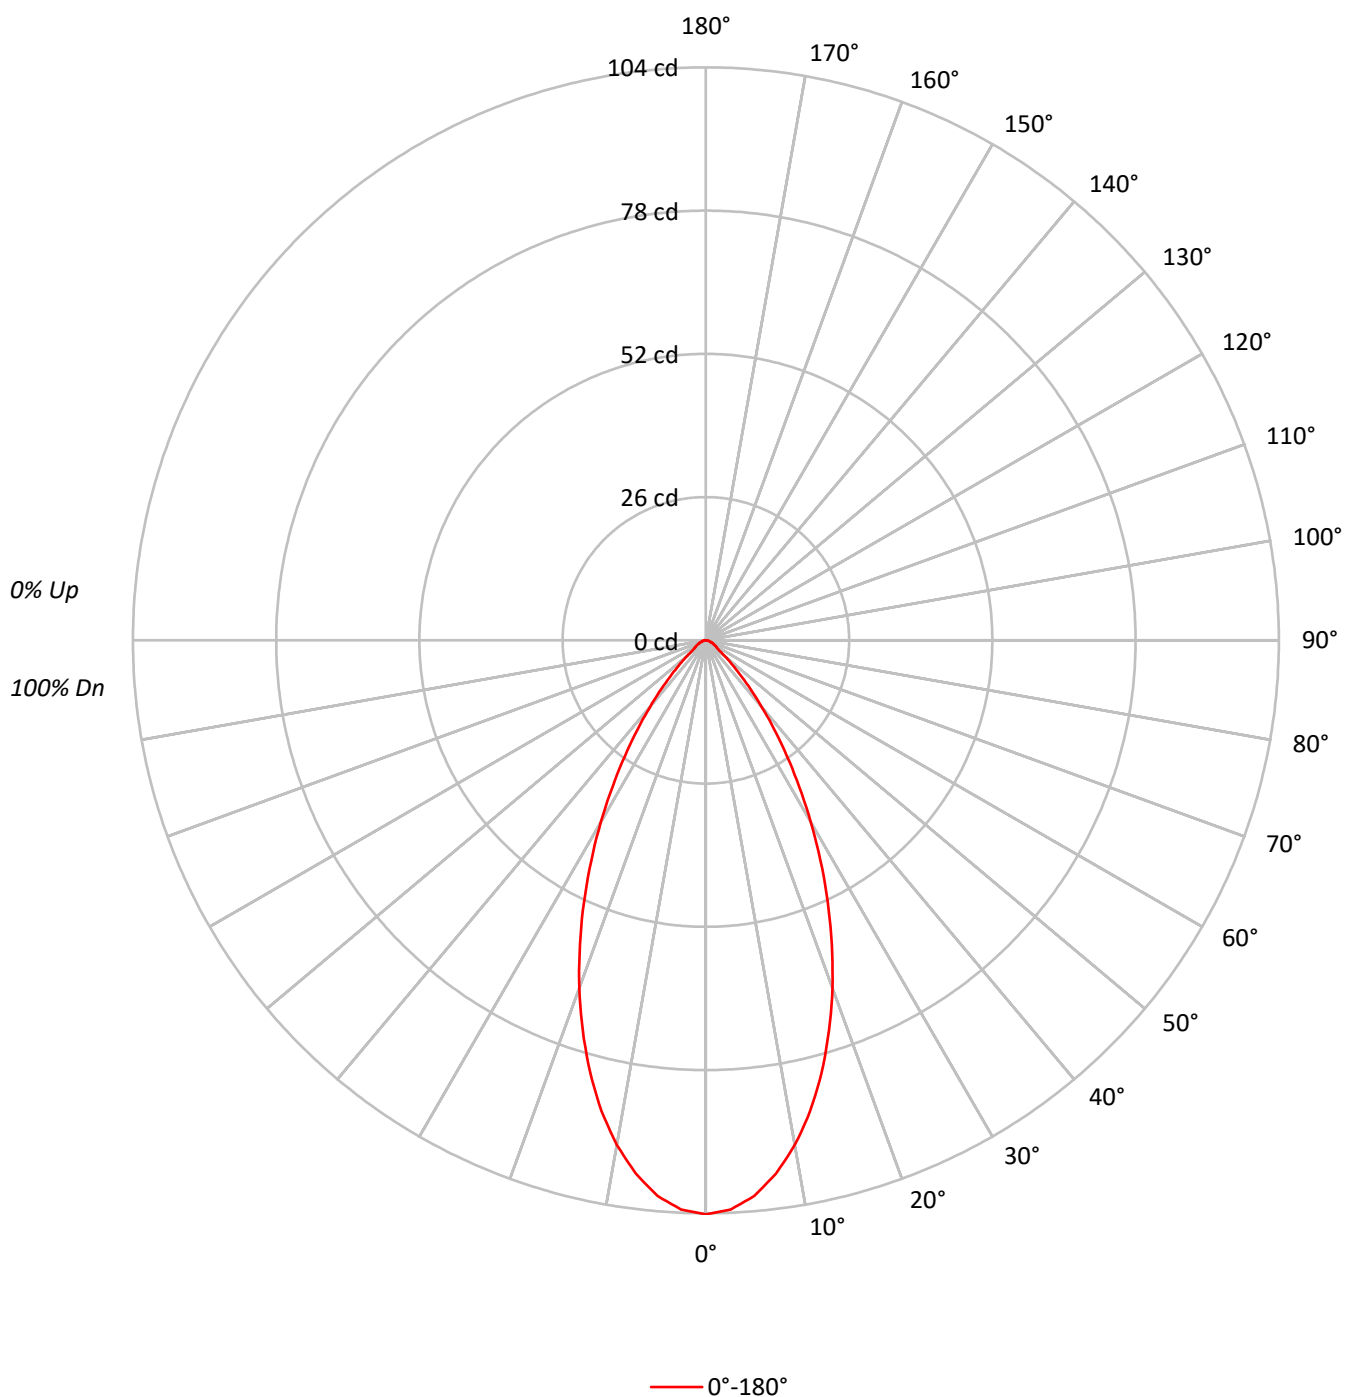

TEST NUMBER: P1268773

CATALOG NUMBER: P3A02R559740DE010 E3DLP1GPH

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20
RC	80				70				50				30				10
RW	70	50	30	10	70	50	30	10	50	30	10		50	30	10		50
RCR																	
0	119	119	119	119	116	116	116	116	111	111	111		106	106	106		102
1	113	110	107	105	110	108	105	103	104	102	100		100	98	97		97
2	107	102	97	94	105	100	96	93	97	93	91		94	91	89		91
3	101	94	89	85	99	93	88	84	90	86	83		88	84	81		86
4	96	88	82	77	94	87	81	77	84	80	76		82	78	75		80
5	91	82	76	71	89	81	75	71	79	74	70		77	73	70		76
6	86	77	70	66	85	76	70	66	74	69	65		73	68	65		72
7	82	72	66	61	80	71	65	61	70	65	61		69	64	61		68
8	78	68	62	57	76	67	61	57	66	61	57		65	60	57		64
9	74	64	58	54	73	63	58	54	62	57	53		62	57	53		61
10	70	60	55	51	69	60	54	50	59	54	50		58	54	50		58

AVERAGE LUMINANCE (cd/sqm):

	0°
0°	22849
5°	22276
10°	20708
15°	18434
20°	15681
25°	12654
30°	9647
35°	6853
40°	4523
45°	2698
50°	1569
55°	956
60°	877
65°	778
70°	641
75°	593
80°	631
85°	503

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 0°

Vertical Angle: 45°

Luminance: 2698 cd/sqm

TEST NUMBER: P1268773

CATALOG NUMBER: P3A02R559740DE010 E3DLP1GPH

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	9.4	11.2
10°-20°	22.5	26.8
20°-30°	23.9	28.4
30°-40°	16.1	19.2
40°-50°	7.1	8.4
50°-60°	2.5	3.0
60°-70°	1.5	1.8
70°-80°	0.8	0.9
80°-90°	0.2	0.3
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	55.8	66.4
0°-40°	71.9	85.6
0°-60°	81.5	97.0
0°-90°	84.0	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	84.0	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	104	
5°	101	9
15°	81	23
25°	52	24
35°	26	16
45°	9	7
55°	2	3
65°	2	1
75°	1	1
85°	0	0
90°	0	

TEST NUMBER: P1268773

CATALOG NUMBER: P3A02R559740DE010 E3DLP1GPH

CANDELA DISTRIBUTION (FULL):

	0°
0°	104.2
2.5°	103.4
5°	101.2
7.5°	97.6
10°	93.0
12.5°	87.5
15°	81.2
17.5°	74.3
20°	67.2
22.5°	59.7
25°	52.3
27.5°	45.0
30°	38.1
32.5°	31.5
35°	25.6
37.5°	20.3
40°	15.8
42.5°	11.9
45°	8.7
47.5°	6.3
50°	4.6
52.5°	3.2
55°	2.5
57.5°	2.3
60°	2.0
62.5°	1.7
65°	1.5
67.5°	1.3
70°	1.0
72.5°	0.9
75°	0.7
77.5°	0.6
80°	0.5
82.5°	0.3
85°	0.2
87.5°	0.1
90°	0.0

(END OF REPORT)