

Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for
Cooper Lighting Solutions

Brand: IRiS

Report Number: P1268915

Luminaire Tested: P3A05R129740DE010 E3DL1MW

Issue Date: 1/30/2026

Test Information

Test Method: LM-79-2019
Report Number: P1268915
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2601-647-3)
Test Lab: INNOVATION CENTER
Issue Date: 1/30/2026
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: IRiS
Catalog Number: P3A05R129740DE010 E3DL1MW
Description: 3in Adjustable LED luminaire with, R12 optic, 4000K CCT AND, 97CRI , E3DL1MW TRIM
Light Source: -
Ballast/Driver: -

Summary


Lumens per Lamp: N/A
Luminaire Lumens: 489.0 lumens
Efficiency: N/A
Efficacy: 64.3 lumens/watt
Spacing Criteria (0/90/45): 0.4 / 0.4 / 0.43
Luminous Opening: Circular (Dia: 0.25' x H: 0')
CIE Type: Direct

Input Watts (W): 7.6
Input Voltage (V): NR
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT

TEST NUMBER: P1268915

CATALOG NUMBER: P3A05R129740DE010 E3DL1MW

Luminous Intensity Polar Plot

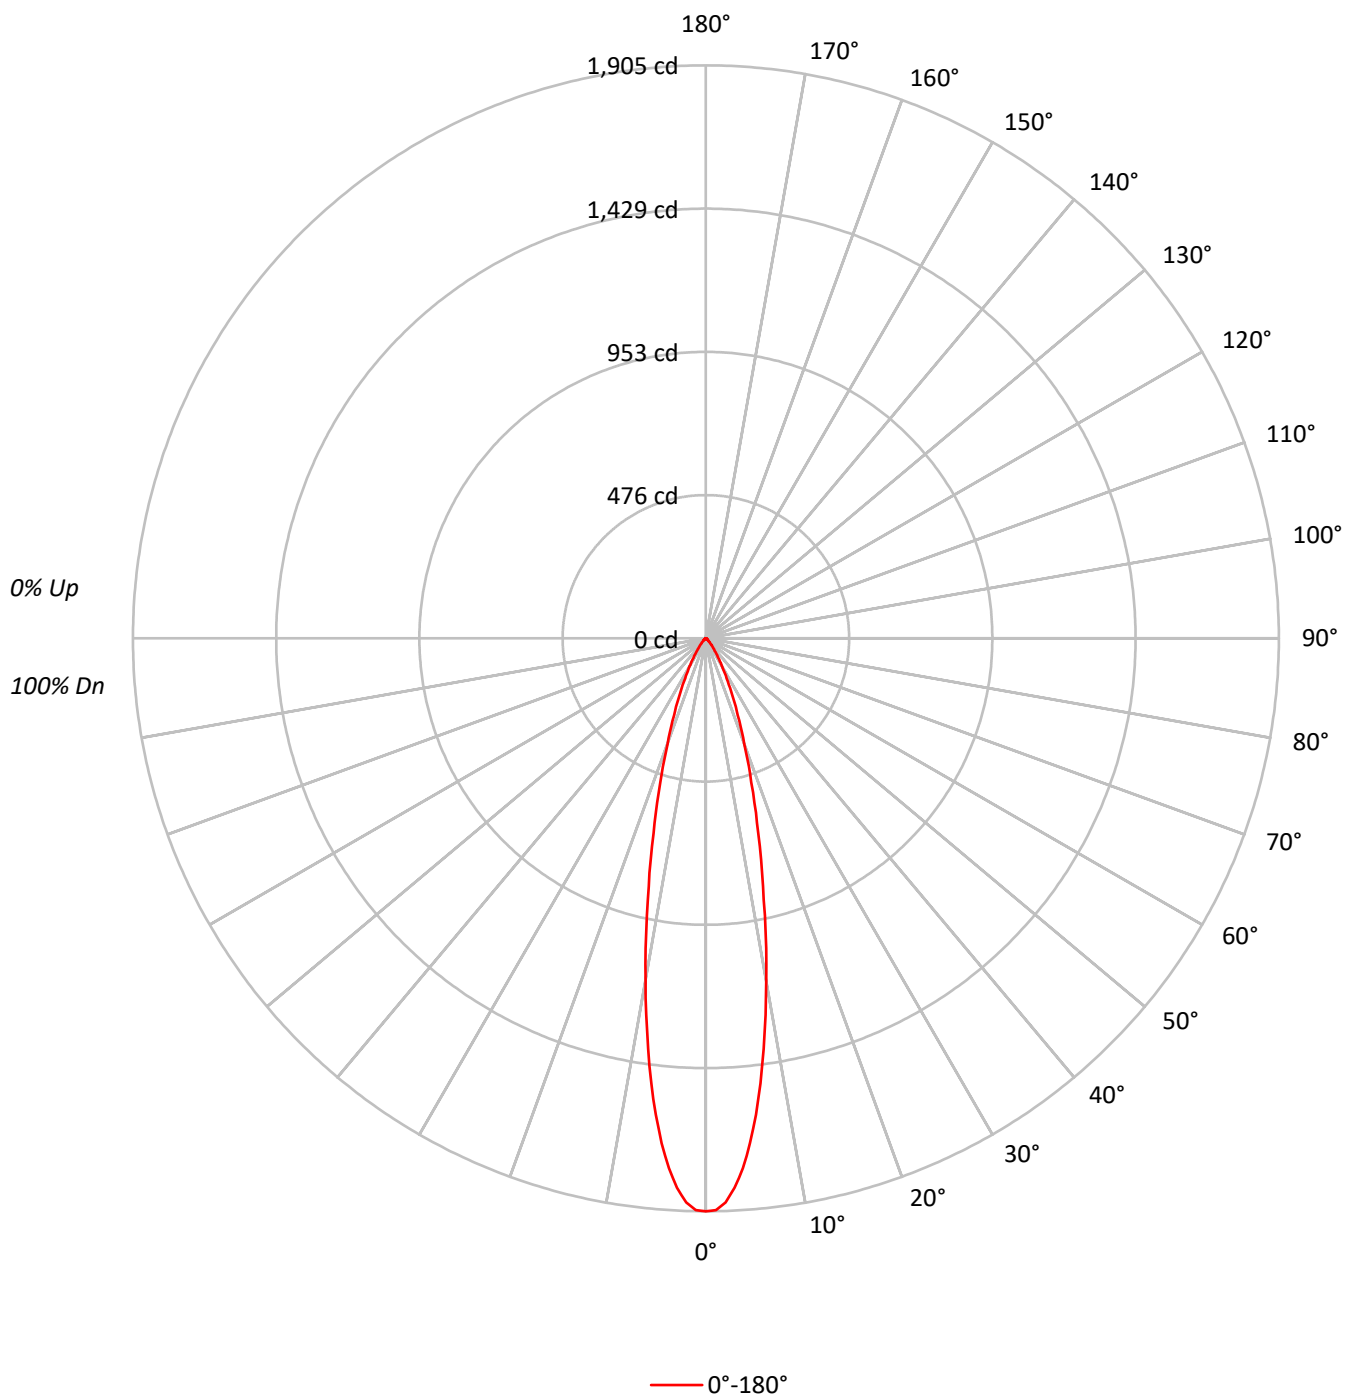

TEST NUMBER: P1268915

CATALOG NUMBER: P3A05R129740DE010 E3DL1MW

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20			
RC	80				70				50				30				10			0
RW	70	50	30	10	70	50	30	10	50	30	10		50	30	10		50	30	10	0
RCR																				
0	119	119	119	119	116	116	116	116	111	111	111		106	106	106		102	102	102	100
1	114	112	110	108	112	110	108	106	106	104	103		102	101	100		99	98	97	95
2	110	106	103	100	108	104	101	99	101	99	97		98	96	95		96	94	93	91
3	106	101	97	93	104	99	96	93	97	94	91		94	92	90		92	90	88	87
4	102	96	92	88	100	95	91	88	93	89	87		91	88	86		89	87	85	83
5	98	92	87	84	97	91	87	83	89	85	83		88	84	82		86	83	81	80
6	95	88	83	80	94	87	83	80	86	82	79		85	81	79		83	80	78	77
7	92	85	80	77	91	84	80	76	83	79	76		82	78	76		81	78	75	74
8	89	81	77	74	88	81	77	73	80	76	73		79	75	73		78	75	73	72
9	86	79	74	71	85	78	74	71	77	73	71		77	73	70		76	73	70	69
10	84	76	71	68	83	76	71	68	75	71	68		74	71	68		74	70	68	67

AVERAGE LUMINANCE (cd/sqm):

	0°
0°	417730
5°	370811
10°	257510
15°	152282
20°	86738
25°	49575
30°	27422
35°	14616
40°	8101
45°	4373
50°	2729
55°	2179
60°	1842
65°	1712
70°	1539
75°	1610
80°	1137
85°	1258

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 0°
Vertical Angle: 45°
Luminance: 4373 cd/sqm

TEST NUMBER: P1268915

CATALOG NUMBER: P3A05R129740DE010 E3DL1MW

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	143.2	29.3
10°-20°	189.1	38.7
20°-30°	97.3	19.9
30°-40°	36.5	7.5
40°-50°	12.0	2.4
50°-60°	5.1	1.1
60°-70°	3.3	0.7
70°-80°	1.9	0.4
80°-90°	0.5	0.1
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	429.6	87.9
0°-40°	466.2	95.3
0°-60°	483.3	98.8
0°-90°	489.0	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	489.0	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	1905	
5°	1685	143
15°	671	189
25°	205	97
35°	55	37
45°	14	12
55°	6	5
65°	3	3
75°	2	2
85°	0	1
90°	0	

TEST NUMBER: P1268915

CATALOG NUMBER: P3A05R129740DE010 E3DL1MW

CANDELA DISTRIBUTION (FULL):

0°	
0°	1905.0
1°	1901.3
2°	1876.3
3°	1828.7
4°	1766.1
5°	1684.6
6°	1592.2
7°	1490.9
8°	1378.4
9°	1267.2
10°	1156.5
12.5°	889.9
15°	670.8
17.5°	502.2
20°	371.7
22.5°	277.5
25°	204.9
27.5°	149.3
30°	108.3
32.5°	76.8
35°	54.6
37.5°	39.1
40°	28.3
42.5°	20.3
45°	14.1
47.5°	10.4
50°	8.0
52.5°	6.6
55°	5.7
57.5°	4.7
60°	4.2
62.5°	3.8
65°	3.3
67.5°	2.8
70°	2.4
72.5°	2.4
75°	1.9
77.5°	1.4
80°	0.9
82.5°	0.9
85°	0.5
87.5°	0.0
90°	0.0

(END OF REPORT)