

Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for
Cooper Lighting Solutions

Brand: IRiS

Report Number: P1268934

Luminaire Tested: P3A05R159740DE010 E3D1H

Issue Date: 1/29/2026

Test Information

Test Method: LM-79-2019
Report Number: P1268934
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2501-338-7)
Test Lab: INNOVATION CENTER
Issue Date: 1/29/2026
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: IRiS
Catalog Number: P3A05R159740DE010 E3D1H
Description: 3in Adjustable LED luminaire with, R15 optic, 4000K CCT AND, 97CRI , E3D1H TRIM
Light Source: -
Ballast/Driver: -

Summary


Lumens per Lamp: N/A
Luminaire Lumens: 627.0 lumens
Efficiency: N/A
Efficacy: 87.1 lumens/watt
Spacing Criteria (0/90/45): 0.3 / 0.3 / 0.29
Luminous Opening: Circular (Dia: 0.25' x H: 0')
CIE Type: Direct

Input Watts (W): 7.2
Input Voltage (V): NR
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT

TEST NUMBER: P1268934

CATALOG NUMBER: P3A05R159740DE010 E3D1H

Luminous Intensity Polar Plot

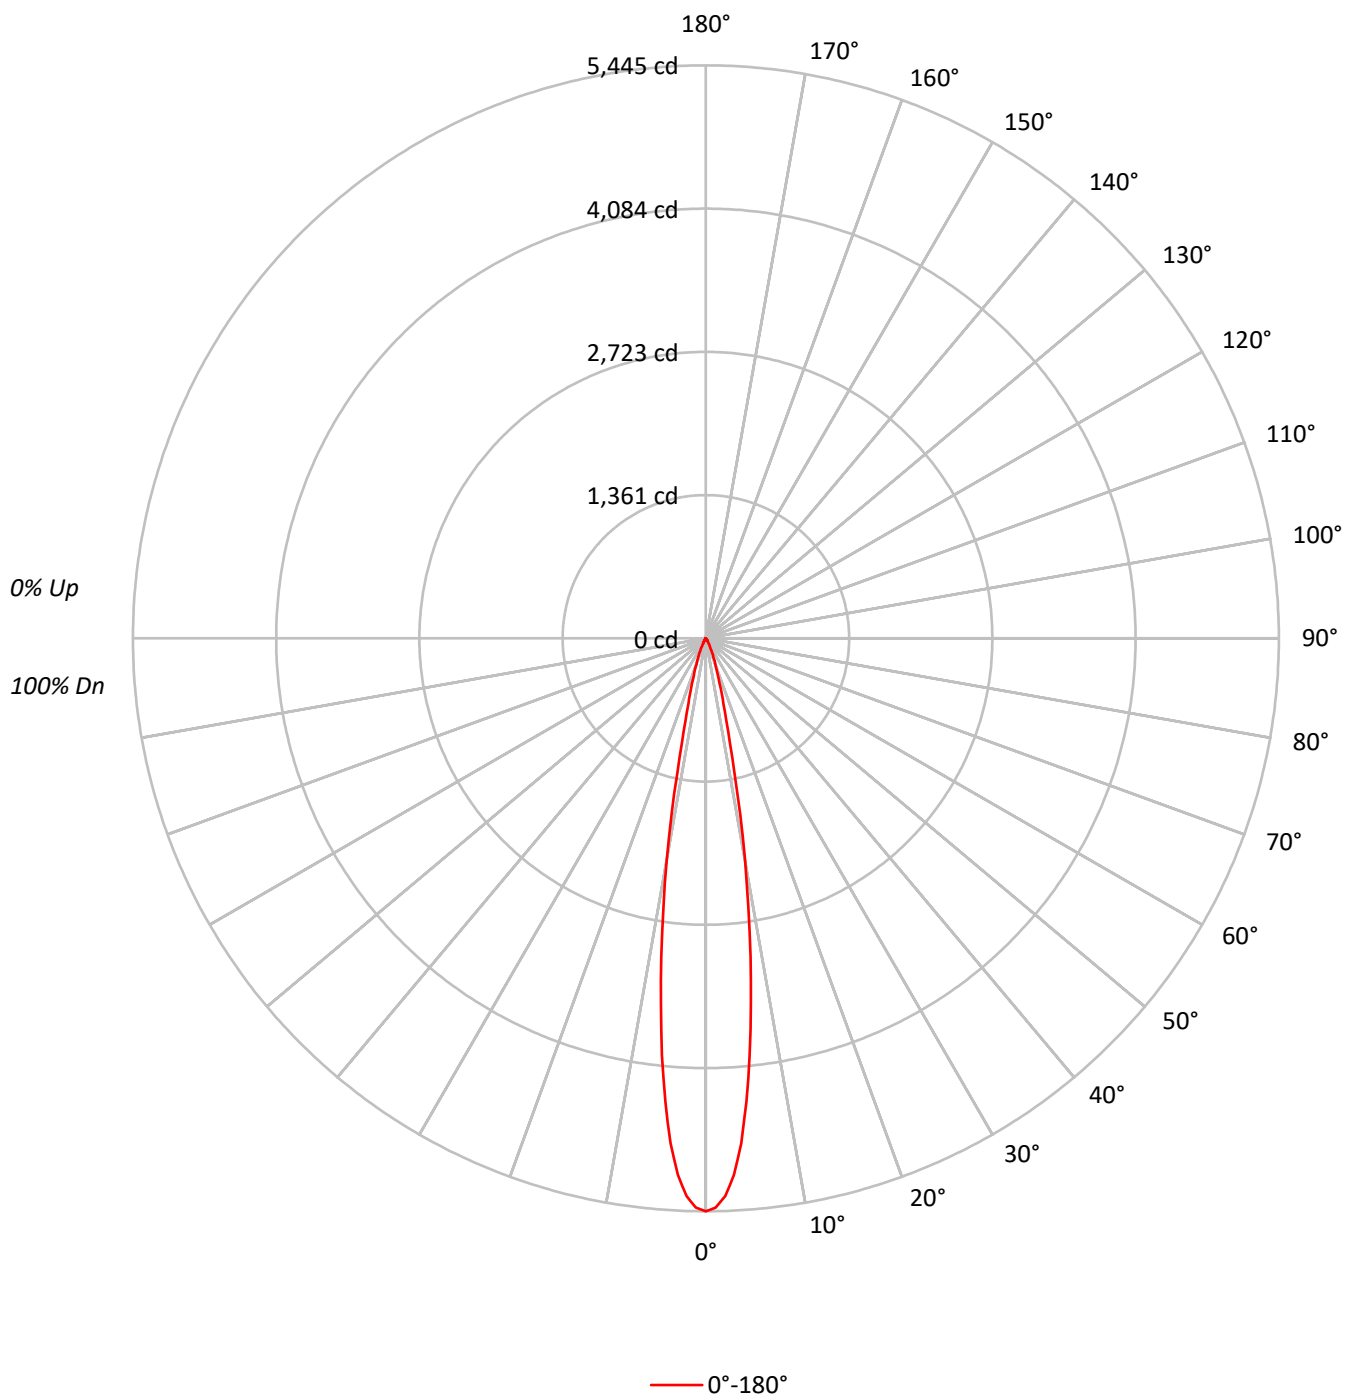

TEST NUMBER: P1268934

CATALOG NUMBER: P3A05R159740DE010 E3D1H

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20					20					20					20
RC	80				70					50					30					10
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10
RCR																				
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100		
1	116	114	112	111	113	112	110	109	108	107	105	104	103	102	101	100	99	98		
2	112	109	107	105	110	108	105	103	105	103	101	102	100	99	99	98	97	96		
3	110	106	102	100	108	104	102	99	102	100	98	100	98	96	98	96	95	94		
4	107	102	99	96	106	101	98	96	99	97	95	98	96	94	96	94	93	92		
5	105	100	96	94	103	99	96	93	97	94	92	96	93	92	94	93	91	90		
6	102	97	94	91	101	96	93	91	95	92	90	94	92	90	93	91	89	88		
7	100	95	91	89	99	94	91	89	93	90	88	92	90	88	91	89	88	87		
8	98	93	89	87	97	92	89	87	91	89	87	91	88	86	90	88	86	85		
9	96	91	88	85	96	91	87	85	90	87	85	89	87	85	89	86	85	84		
10	95	89	86	84	94	89	86	84	88	85	83	88	85	83	87	85	83	82		

AVERAGE LUMINANCE (cd/sqm):

	0°
0°	1193961
5°	973605
10°	476811
15°	145949
20°	61815
25°	27945
30°	10888
35°	5033
40°	1574
45°	589
50°	239
55°	76
60°	88
65°	104
70°	0
75°	0
80°	0
85°	0

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 0°

Vertical Angle: 45°

Luminance: 589 cd/sqm

TEST NUMBER: P1268934

CATALOG NUMBER: P3A05R159740DE010 E3D1H

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	344.3	54.9
10°-20°	211.3	33.7
20°-30°	56.7	9.1
30°-40°	12.5	2.0
40°-50°	1.8	0.3
50°-60°	0.3	0.0
60°-70°	0.1	0.0
70°-80°	0.0	0.0
80°-90°	0.0	0.0
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	612.3	97.7
0°-40°	624.8	99.7
0°-60°	626.9	100.0
0°-90°	627.0	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	627.0	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	5445	
5°	4423	344
15°	643	211
25°	116	57
35°	19	13
45°	2	2
55°	0	0
65°	0	0
75°	0	0
85°	0	0
90°	0	

TEST NUMBER: P1268934

CATALOG NUMBER: P3A05R159740DE010 E3D1H

CANDELA DISTRIBUTION (FULL):

0°	
0°	5444.9
1°	5410.9
2°	5301.8
3°	5105.2
4°	4809.2
5°	4423.1
6°	3986.3
7°	3499.9
8°	3052.9
9°	2579.1
10°	2141.4
11°	1708.2
12°	1314.3
13°	1010.9
14°	800.3
15°	642.9
17.5°	398.5
20°	264.9
22.5°	178.3
25°	115.5
27.5°	68.5
30°	43.0
32.5°	29.0
35°	18.8
37.5°	10.5
40°	5.5
42.5°	3.1
45°	1.9
47.5°	1.2
50°	0.7
52.5°	0.5
55°	0.2
57.5°	0.2
60°	0.2
62.5°	0.2
65°	0.2
67.5°	0.0
70°	0.0
72.5°	0.0
75°	0.0
77.5°	0.0
80°	0.0
82.5°	0.0
85°	0.0
87.5°	0.0



TEST NUMBER: P1268934
CATALOG NUMBER: P3A05R159740DE010 E3D1H

CANDELA DISTRIBUTION (continued):

0°
90° | 0.0

(END OF REPORT)