

Scaled data based on original data using  
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-  
State Lighting Products

Test Report Prepared for  
Cooper Lighting Solutions

Brand: IRiS

Report Number: P1269139

Luminaire Tested: P3A05R509740DE010 E3D1LI

Issue Date: 1/29/2026

**Test Information**

Test Method: LM-79-2019  
Report Number: P1269139  
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2501-338-13)  
Test Lab: INNOVATION CENTER  
Issue Date: 1/29/2026  
Manufacturer: COOPER LIGHTING SOLUTIONS  
Product Line: IRiS  
Catalog Number: P3A05R509740DE010 E3D1LI  
Description: 3in Adjustable LED luminaire with, R50 optic, 4000K CCT AND, 97CRI , E3D1LI TRIM  
Light Source: -  
Ballast/Driver: -

**Summary**


Lumens per Lamp: N/A  
Luminaire Lumens: 674.0 lumens  
Efficiency: N/A  
Efficacy: 93.6 lumens/watt  
Spacing Criteria (0/90/45): 0.82 / 0.82 / 0.77  
Luminous Opening: Circular (Dia: 0.25' x H: 0')  
CIE Type: Direct

Input Watts (W): 7.2  
Input Voltage (V): NR  
Input Current (Ain): NR  
Voltage Rise (V): NR  
Power Factor: NR  
Total Harmonic Distortion (THDi): NR  
Frequency (hertz): 60  
Stabilization Time: NR  
Operation Time: NR  
Ambient Temperature (°C): NR  
Test Distance: 24 FT

TEST NUMBER: P1269139

CATALOG NUMBER: P3A05R509740DE010 E3D1LI

### Luminous Intensity Polar Plot

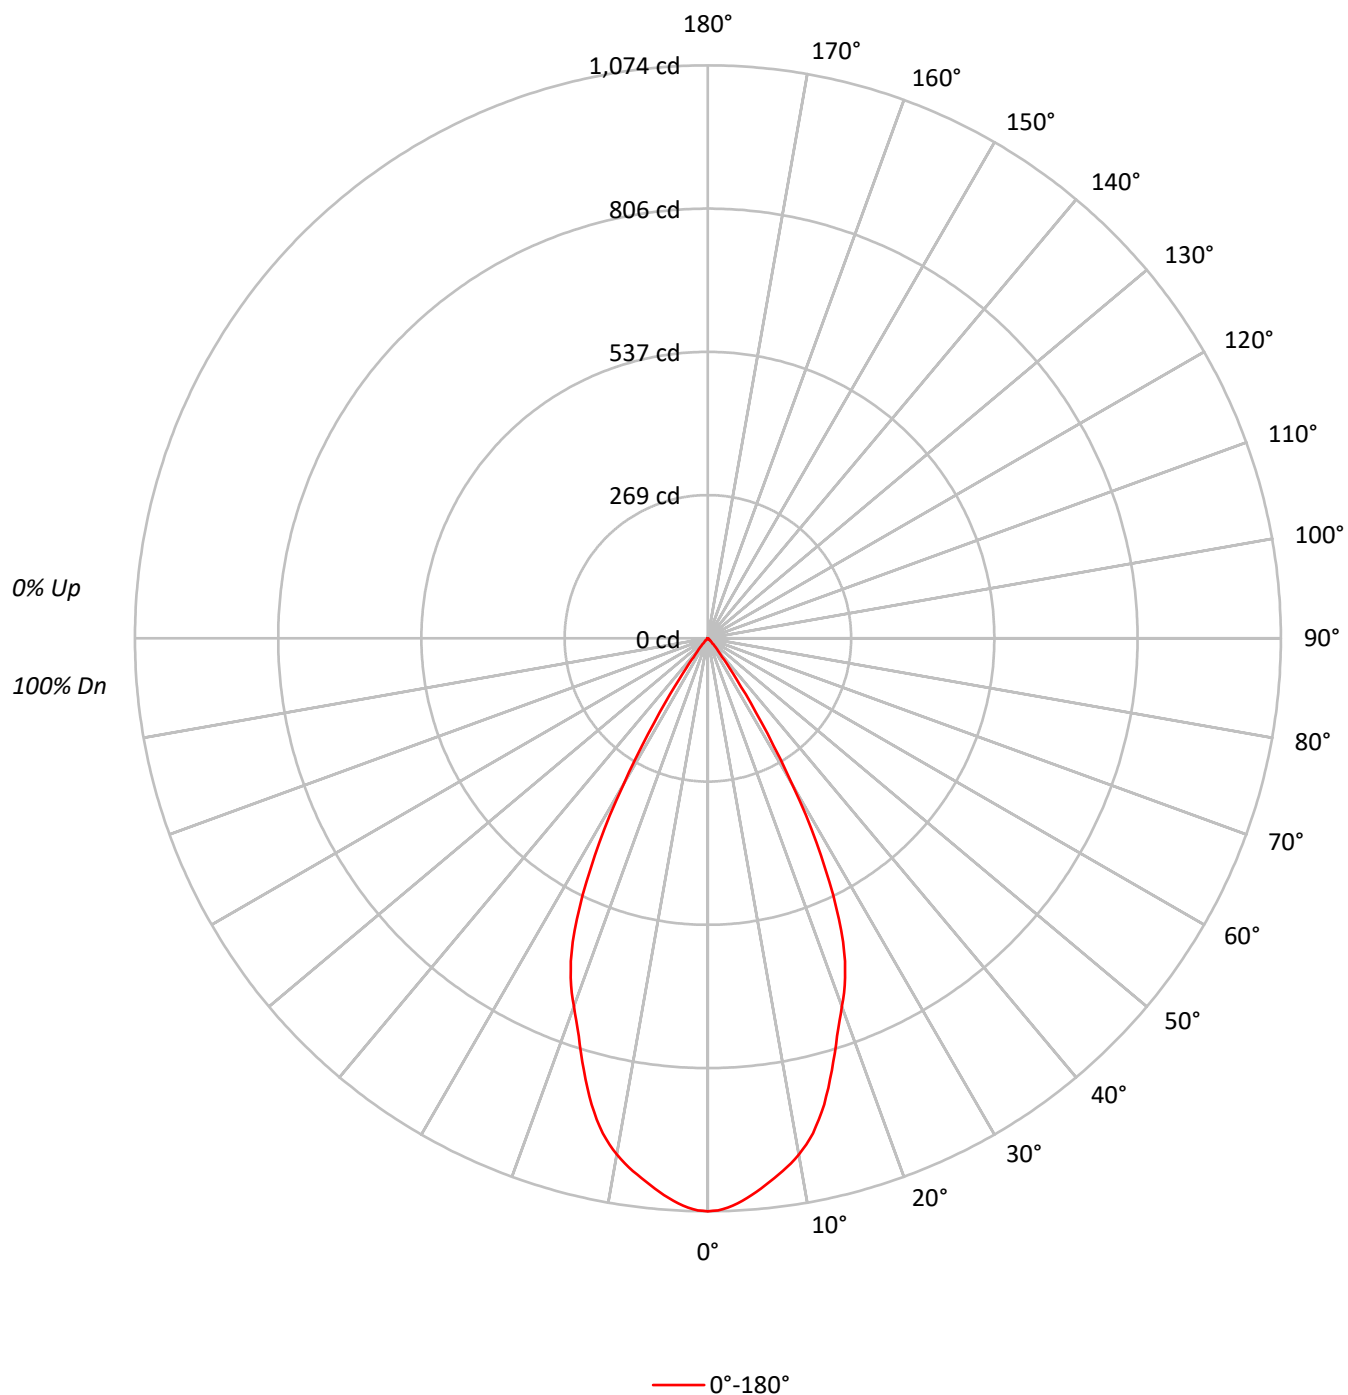

TEST NUMBER: P1269139

CATALOG NUMBER: P3A05R509740DE010 E3D1LI

**COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:**

|     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |
|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|
| RF  | 20  |     |     |     | 20  |     |     |     |     | 20  |     |     |     |     | 20  |     |     |     |     | 20  |
| RC  | 80  |     |     |     | 70  |     |     |     |     | 50  |     |     |     |     | 30  |     |     |     |     | 10  |
| RW  | 70  | 50  | 30  | 10  | 70  | 50  | 30  | 10  | 50  | 30  | 10  | 50  | 30  | 10  | 50  | 30  | 10  | 50  | 30  | 10  |
| RCR |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |
| 0   | 119 | 119 | 119 | 119 | 116 | 116 | 116 | 116 | 111 | 111 | 111 | 106 | 106 | 106 | 102 | 102 | 102 | 102 | 102 | 100 |
| 1   | 114 | 112 | 109 | 107 | 112 | 110 | 108 | 106 | 105 | 104 | 102 | 102 | 101 | 99  | 98  | 97  | 97  | 97  | 97  | 95  |
| 2   | 109 | 105 | 101 | 98  | 107 | 103 | 100 | 97  | 100 | 97  | 95  | 97  | 95  | 93  | 94  | 93  | 91  | 91  | 91  | 90  |
| 3   | 105 | 99  | 95  | 91  | 103 | 98  | 94  | 90  | 95  | 92  | 89  | 93  | 90  | 88  | 91  | 88  | 86  | 86  | 86  | 85  |
| 4   | 100 | 94  | 89  | 85  | 99  | 92  | 88  | 85  | 90  | 87  | 84  | 88  | 85  | 83  | 87  | 84  | 82  | 82  | 82  | 80  |
| 5   | 96  | 89  | 84  | 80  | 94  | 88  | 83  | 79  | 86  | 82  | 79  | 84  | 81  | 78  | 83  | 80  | 77  | 77  | 77  | 76  |
| 6   | 92  | 84  | 79  | 75  | 91  | 83  | 78  | 75  | 82  | 78  | 74  | 81  | 77  | 74  | 79  | 76  | 73  | 73  | 73  | 72  |
| 7   | 88  | 80  | 75  | 71  | 87  | 79  | 74  | 71  | 78  | 74  | 70  | 77  | 73  | 70  | 76  | 72  | 70  | 70  | 70  | 68  |
| 8   | 84  | 76  | 71  | 67  | 83  | 76  | 71  | 67  | 75  | 70  | 67  | 74  | 69  | 66  | 73  | 69  | 66  | 66  | 66  | 65  |
| 9   | 81  | 73  | 67  | 64  | 80  | 72  | 67  | 64  | 71  | 67  | 63  | 70  | 66  | 63  | 70  | 66  | 63  | 63  | 63  | 62  |
| 10  | 78  | 69  | 64  | 61  | 77  | 69  | 64  | 61  | 68  | 64  | 60  | 67  | 63  | 60  | 67  | 63  | 60  | 60  | 60  | 59  |

**AVERAGE LUMINANCE (cd/sqm):**

|     |        |
|-----|--------|
|     | 0°     |
| 0°  | 235529 |
| 5°  | 229275 |
| 10° | 218789 |
| 15° | 198072 |
| 20° | 171352 |
| 25° | 140548 |
| 30° | 80747  |
| 35° | 25083  |
| 40° | 6727   |
| 45° | 2357   |
| 50° | 580    |
| 55° | 191    |
| 60° | 88     |
| 65° | 104    |
| 70° | 0      |
| 75° | 0      |
| 80° | 0      |
| 85° | 0      |

**MAXIMUM LUMINANCE 45°-90°:**

Horizontal Angle: 0°

Vertical Angle: 45°

Luminance: 2357 cd/sqm

TEST NUMBER: P1269139

CATALOG NUMBER: P3A05R509740DE010 E3D1LI

**ZONAL LUMENS:**

| Zone      | Lumens | % Fixture |
|-----------|--------|-----------|
| 0°-10°    | 97.6   | 14.5      |
| 10°-20°   | 241.7  | 35.9      |
| 20°-30°   | 254.1  | 37.7      |
| 30°-40°   | 72.7   | 10.8      |
| 40°-50°   | 7.1    | 1.1       |
| 50°-60°   | 0.6    | 0.1       |
| 60°-70°   | 0.2    | 0.0       |
| 70°-80°   | 0.0    | 0.0       |
| 80°-90°   | 0.0    | 0.0       |
| 90°-100°  | 0.0    | 0.0       |
| 100°-110° | 0.0    | 0.0       |
| 110°-120° | 0.0    | 0.0       |
| 120°-130° | 0.0    | 0.0       |
| 130°-140° | 0.0    | 0.0       |
| 140°-150° | 0.0    | 0.0       |
| 150°-160° | 0.0    | 0.0       |
| 160°-170° | 0.0    | 0.0       |
| 170°-180° | 0.0    | 0.0       |
| 0°-30°    | 593.4  | 88.0      |
| 0°-40°    | 666.1  | 98.8      |
| 0°-60°    | 673.8  | 100.0     |
| 0°-90°    | 674.0  | 100.0     |
| 90°-120°  | 0.0    | 0.0       |
| 90°-150°  | 0.0    | 0.0       |
| 90°-180°  | 0.0    | 0.0       |
| 0°-180°   | 674.0  | 100.0     |

**CANDELA DISTRIBUTION:**

|     | 0°   | Flux |
|-----|------|------|
| 0°  | 1074 |      |
| 5°  | 1042 | 98   |
| 15° | 872  | 242  |
| 25° | 581  | 254  |
| 35° | 94   | 73   |
| 45° | 8    | 7    |
| 55° | 0    | 1    |
| 65° | 0    | 0    |
| 75° | 0    | 0    |
| 85° | 0    | 0    |
| 90° | 0    |      |

TEST NUMBER: P1269139

CATALOG NUMBER: P3A05R509740DE010 E3D1LI

**CANDELA DISTRIBUTION (FULL):**

| 0°    |        |
|-------|--------|
| 0°    | 1074.1 |
| 1°    | 1072.5 |
| 2°    | 1067.7 |
| 3°    | 1060.8 |
| 4°    | 1051.5 |
| 5°    | 1041.6 |
| 6°    | 1030.9 |
| 7°    | 1019.4 |
| 8°    | 1008.7 |
| 9°    | 996.4  |
| 10°   | 982.6  |
| 11°   | 966.6  |
| 12°   | 948.3  |
| 13°   | 925.5  |
| 14°   | 900.8  |
| 15°   | 872.5  |
| 16°   | 842.5  |
| 17°   | 813.5  |
| 18°   | 783.8  |
| 19°   | 757.6  |
| 20°   | 734.3  |
| 21°   | 712.0  |
| 22°   | 686.5  |
| 23°   | 657.3  |
| 24°   | 623.0  |
| 25°   | 580.9  |
| 26°   | 535.3  |
| 27°   | 484.4  |
| 28°   | 433.7  |
| 29°   | 379.0  |
| 30°   | 318.9  |
| 31°   | 262.5  |
| 32°   | 210.7  |
| 32.5° | 188.1  |
| 33°   | 165.3  |
| 34°   | 126.7  |
| 35°   | 93.7   |
| 36°   | 68.7   |
| 37°   | 51.1   |
| 37.5° | 44.2   |
| 38°   | 38.3   |
| 39°   | 29.7   |
| 40°   | 23.5   |
| 42.5° | 13.3   |
| 45°   | 7.6    |

TEST NUMBER: P1269139

CATALOG NUMBER: P3A05R509740DE010 E3D1LI

**CANDELA DISTRIBUTION (continued):**

|       | 0°  |
|-------|-----|
| 47.5° | 4.3 |
| 50°   | 1.7 |
| 52.5° | 0.7 |
| 55°   | 0.5 |
| 57.5° | 0.5 |
| 60°   | 0.2 |
| 62.5° | 0.2 |
| 65°   | 0.2 |
| 67.5° | 0.2 |
| 70°   | 0.0 |
| 72.5° | 0.0 |
| 75°   | 0.0 |
| 77.5° | 0.0 |
| 80°   | 0.0 |
| 82.5° | 0.0 |
| 85°   | 0.0 |
| 87.5° | 0.0 |
| 90°   | 0.0 |

(END OF REPORT)