

Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for
Cooper Lighting Solutions

Brand: IRiS

Report Number: P1269171

Luminaire Tested: P3A05R559740DE010 E3D1WMH

Issue Date: 1/29/2026

Test Information

Test Method: LM-79-2019
Report Number: P1269171
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2501-338-14)
Test Lab: INNOVATION CENTER
Issue Date: 1/29/2026
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: IRiS
Catalog Number: P3A05R559740DE010 E3D1WMH
Description: 3in Adjustable LED luminaire with, R55 optic, 4000K CCT AND, 97CRI , E3D1WMH TRIM
Light Source: -
Ballast/Driver: -


Summary

Lumens per Lamp: N/A
Luminaire Lumens: 626.0 lumens
Efficiency: N/A
Efficacy: 86.9 lumens/watt
Spacing Criteria (0/90/45): 0.93 / 0.93 / 0.82
Luminous Opening: Circular (Dia: 0.25' x H: 0')
CIE Type: Direct

Input Watts (W): 7.2
Input Voltage (V): NR
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT

TEST NUMBER: P1269171
CATALOG NUMBER: P3A05R559740DE010 E3D1WMH

Luminous Intensity Polar Plot

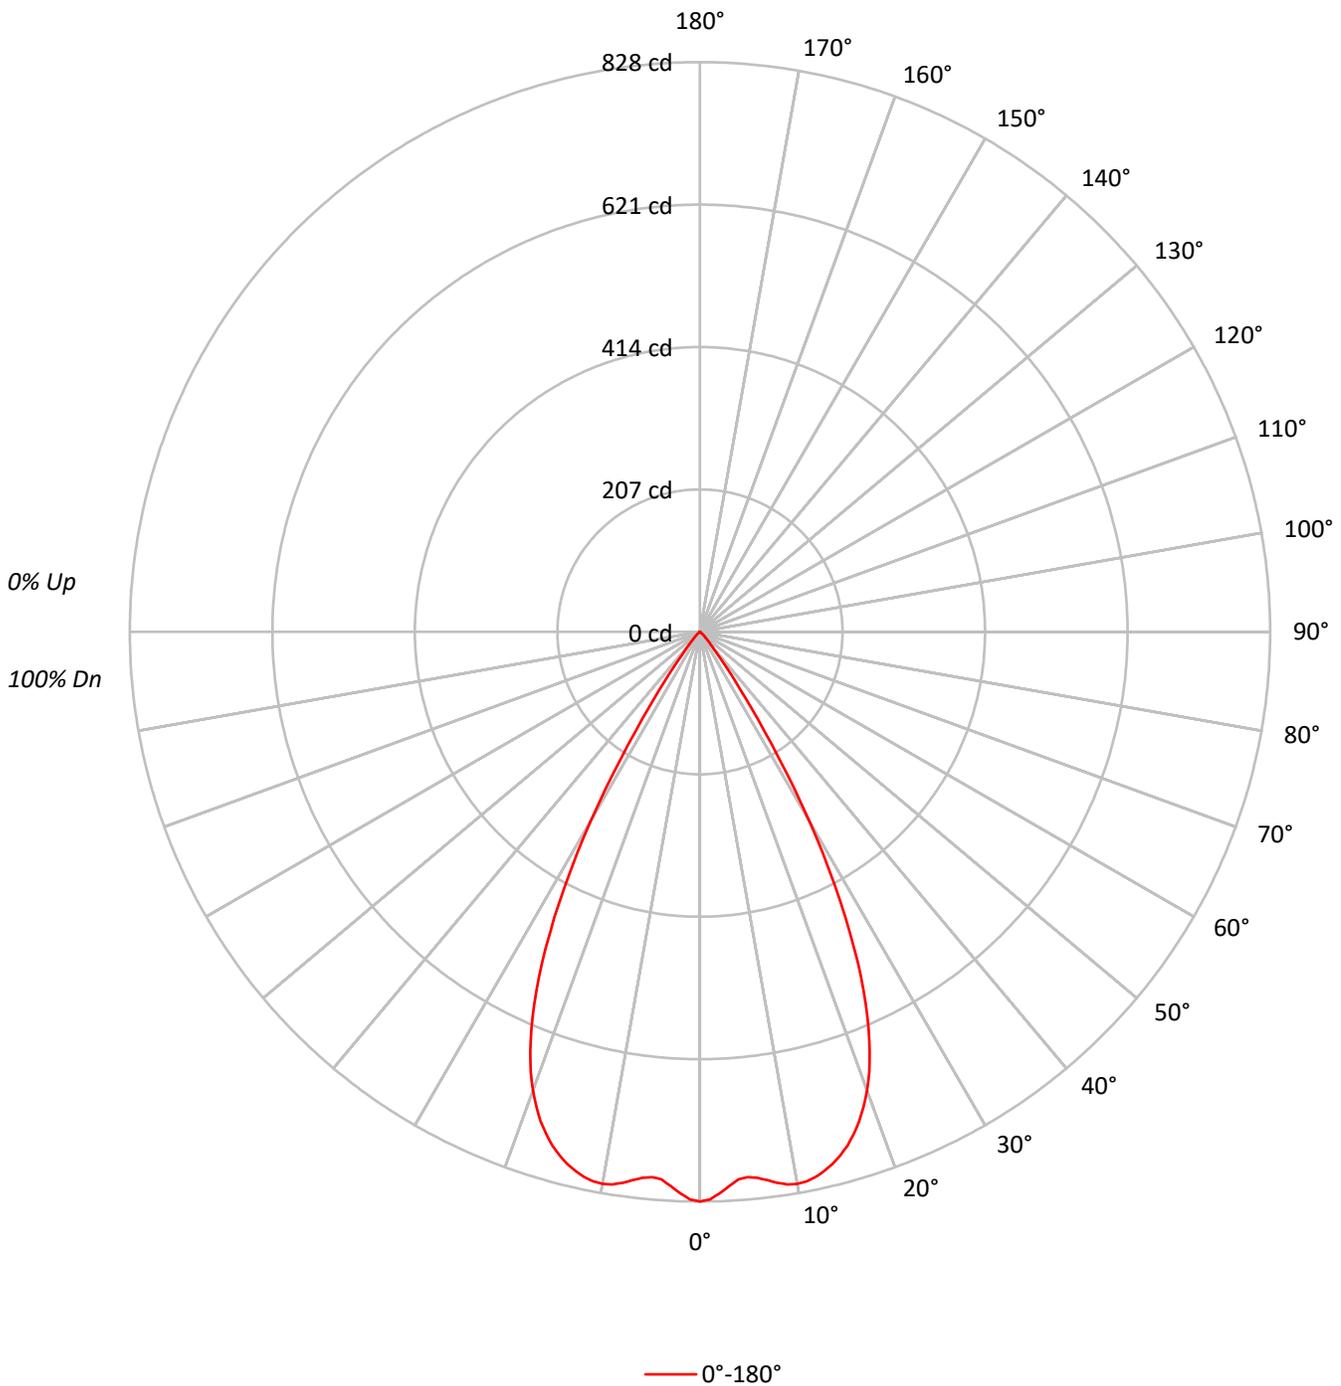



TEST NUMBER: P1269171
 CATALOG NUMBER: P3A05R559740DE010 E3D1WMH

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	77.0	12.3
10°-20°	219.3	35.0
20°-30°	243.8	38.9
30°-40°	75.9	12.1
40°-50°	9.1	1.5
50°-60°	0.7	0.1
60°-70°	0.2	0.0
70°-80°	0.0	0.0
80°-90°	0.0	0.0
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	540.0	86.3
0°-40°	615.9	98.4
0°-60°	625.7	100.0
0°-90°	626.0	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	626.0	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	828	
5°	796	77
15°	788	219
25°	553	244
35°	102	76
45°	11	9
55°	0	1
65°	0	0
75°	0	0
85°	0	0
90°	0	



TEST NUMBER: P1269171
CATALOG NUMBER: P3A05R559740DE010 E3D1WMH

CANDELA DISTRIBUTION (FULL):

	0°
0°	827.9
1°	824.8
2°	816.7
3°	806.7
4°	797.7
5°	795.5
6°	797.9
7°	802.9
8°	808.6
9°	813.1
10°	814.5
11°	813.6
12°	809.8
13°	803.8
14°	796.9
15°	787.7
16°	777.0
17°	763.4
18°	748.2
19°	729.9
20°	709.2
21°	685.6
22°	657.8
23°	627.1
24°	591.9
25°	553.2
26°	510.6
27°	465.4
28°	417.1
29°	367.4
30°	316.8
31°	265.9
32°	216.2
32.5°	194.1
33°	171.2
34°	132.5
35°	101.5
36°	77.3
37°	57.3
37.5°	49.0
38°	42.6
39°	32.3
40°	26.2
42.5°	16.6
45°	10.7



TEST NUMBER: P1269171
CATALOG NUMBER: P3A05R559740DE010 E3D1WMH

CANDELA DISTRIBUTION (continued):

	0°
47.5°	6.4
50°	2.9
52.5°	1.0
55°	0.5
57.5°	0.2
60°	0.2
62.5°	0.2
65°	0.2
67.5°	0.2
70°	0.2
72.5°	0.0
75°	0.0
77.5°	0.0
80°	0.0
82.5°	0.0
85°	0.0
87.5°	0.0
90°	0.0

(END OF REPORT)