

Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for
Cooper Lighting Solutions

Brand: IRiS

Report Number: P1269172

Luminaire Tested: P3A05R559740DE010 E3DL1GPH

Issue Date: 1/30/2026

Test Information

Test Method: LM-79-2019
Report Number: P1269172
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2601-647-35)
Test Lab: INNOVATION CENTER
Issue Date: 1/30/2026
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: IRiS
Catalog Number: P3A05R559740DE010 E3DL1GPH
Description: 3in Adjustable LED luminaire with, R55 optic, 4000K CCT AND, 97CRI , E3DL1GPH TRIM
Light Source: -
Ballast/Driver: -

Summary


Lumens per Lamp: N/A
Luminaire Lumens: 259.0 lumens
Efficiency: N/A
Efficacy: 36.0 lumens/watt
Spacing Criteria (0/90/45): 0.83 / 0.83 / 0.81
Luminous Opening: Circular (Dia: 0.25' x H: 0')
CIE Type: Direct

Input Watts (W): 7.2
Input Voltage (V): NR
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT

TEST NUMBER: P1269172

CATALOG NUMBER: P3A05R559740DE010 E3DL1GPH

Luminous Intensity Polar Plot

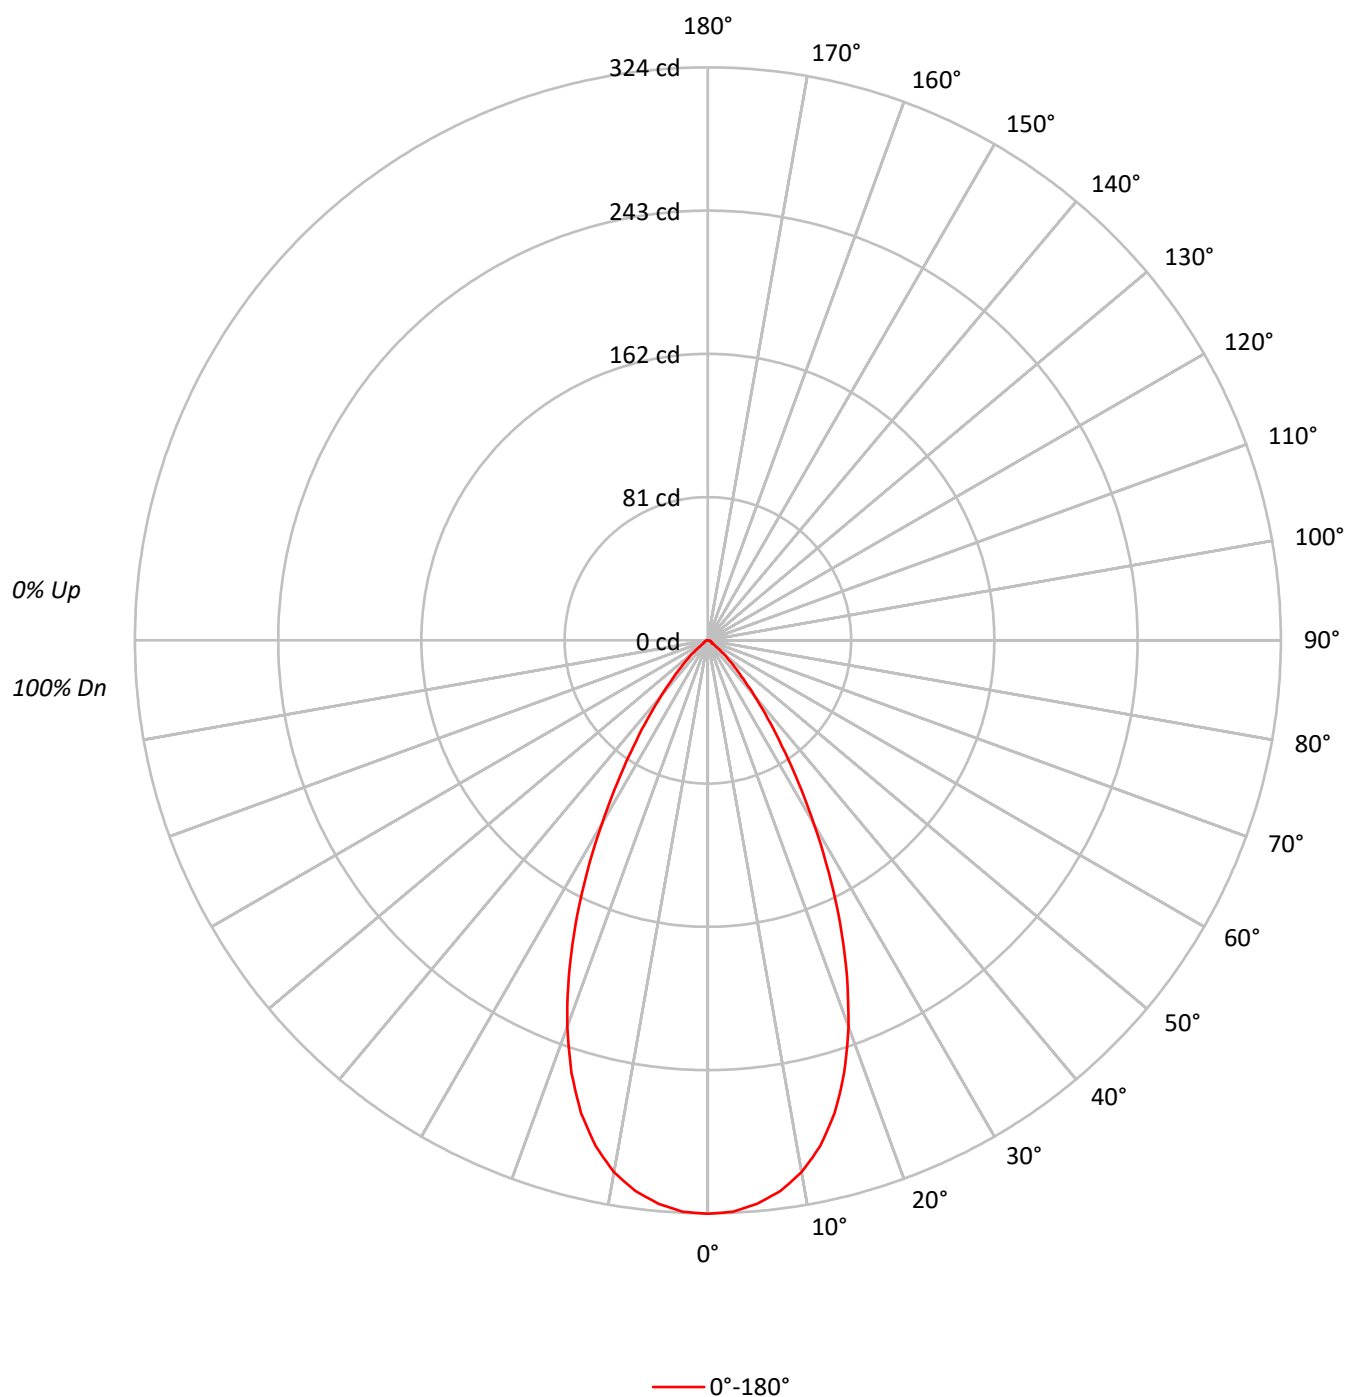

TEST NUMBER: P1269172

CATALOG NUMBER: P3A05R559740DE010 E3DL1GPH

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20					20					20					20
RC	80				70					50					30					10
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10
RCR																				
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100		
1	113	111	108	106	111	108	106	104	104	103	101	101	99	98	97	96	95	93		
2	108	103	99	95	106	101	97	94	98	95	92	95	92	90	92	90	88	87		
3	102	96	91	87	100	94	90	86	92	88	85	89	86	83	87	85	82	81		
4	97	90	84	80	95	89	83	79	86	82	78	84	81	78	82	79	77	75		
5	92	84	78	74	91	83	78	74	81	77	73	80	76	72	78	75	72	70		
6	88	79	73	69	86	78	73	68	77	72	68	75	71	68	74	70	67	66		
7	84	74	68	64	82	74	68	64	72	67	64	71	67	63	70	66	63	62		
8	80	70	64	60	78	70	64	60	69	63	60	67	63	60	67	62	59	58		
9	76	66	61	57	75	66	60	56	65	60	56	64	59	56	63	59	56	55		
10	73	63	57	53	72	62	57	53	62	57	53	61	56	53	60	56	53	52		

AVERAGE LUMINANCE (cd/sqm):

	0°
0°	71113
5°	70394
10°	67979
15°	62838
20°	54231
25°	42825
30°	30384
35°	19595
40°	11765
45°	6636
50°	3582
55°	1262
60°	1140
65°	1090
70°	1090
75°	1017
80°	884
85°	503

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 0°
Vertical Angle: 45°
Luminance: 6636 cd/sqm

TEST NUMBER: P1269172

CATALOG NUMBER: P3A05R559740DE010 E3DL1GPH

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	30.1	11.6
10°-20°	76.5	29.6
20°-30°	80.2	31.0
30°-40°	46.8	18.1
40°-50°	17.5	6.8
50°-60°	4.1	1.6
60°-70°	2.1	0.8
70°-80°	1.3	0.5
80°-90°	0.3	0.1
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	186.8	72.1
0°-40°	233.6	90.2
0°-60°	255.3	98.6
0°-90°	259.0	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	259.0	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	324	
5°	320	30
15°	277	77
25°	177	80
35°	73	47
45°	21	18
55°	3	4
65°	2	2
75°	1	1
85°	0	0
90°	0	

TEST NUMBER: P1269172

CATALOG NUMBER: P3A05R559740DE010 E3DL1GPH

CANDELA DISTRIBUTION (FULL):

0°	
0°	324.3
2.5°	323.4
5°	319.8
7.5°	314.1
10°	305.3
12.5°	293.0
15°	276.8
17.5°	256.4
20°	232.4
22.5°	205.5
25°	177.0
27.5°	147.8
30°	120.0
32.5°	94.8
35°	73.2
37.5°	55.6
40°	41.1
42.5°	29.5
45°	21.4
47.5°	15.4
50°	10.5
52.5°	5.9
55°	3.3
57.5°	2.9
60°	2.6
62.5°	2.4
65°	2.1
67.5°	1.9
70°	1.7
72.5°	1.4
75°	1.2
77.5°	1.0
80°	0.7
82.5°	0.5
85°	0.2
87.5°	0.2
90°	0.0

(END OF REPORT)