

Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for
Cooper Lighting Solutions

Brand: IRiS

Report Number: P1269333

Luminaire Tested: P3A09R159740DE010 E3DLP1WH

Issue Date: 1/30/2026

Test Information

Test Method: LM-79-2019
Report Number: P1269333
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2601-647-3)
Test Lab: INNOVATION CENTER
Issue Date: 1/30/2026
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: IRiS
Catalog Number: P3A09R159740DE010 E3DLP1WH
Description: 3in Adjustable LED luminaire with, R15 optic, 4000K CCT AND, 97CRI , E3DLP1WH TRIM
Light Source: -
Ballast/Driver: -


Summary

Lumens per Lamp: N/A
Luminaire Lumens: 736.0 lumens
Efficiency: N/A
Efficacy: 66.3 lumens/watt
Spacing Criteria (0/90/45): 0.4 / 0.4 / 0.43
Luminous Opening: Circular (Dia: 0.25' x H: 0')
CIE Type: Direct

Input Watts (W): 11.1
Input Voltage (V): NR
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT

TEST NUMBER: P1269333
CATALOG NUMBER: P3A09R159740DE010 E3DLP1WH

Luminous Intensity Polar Plot

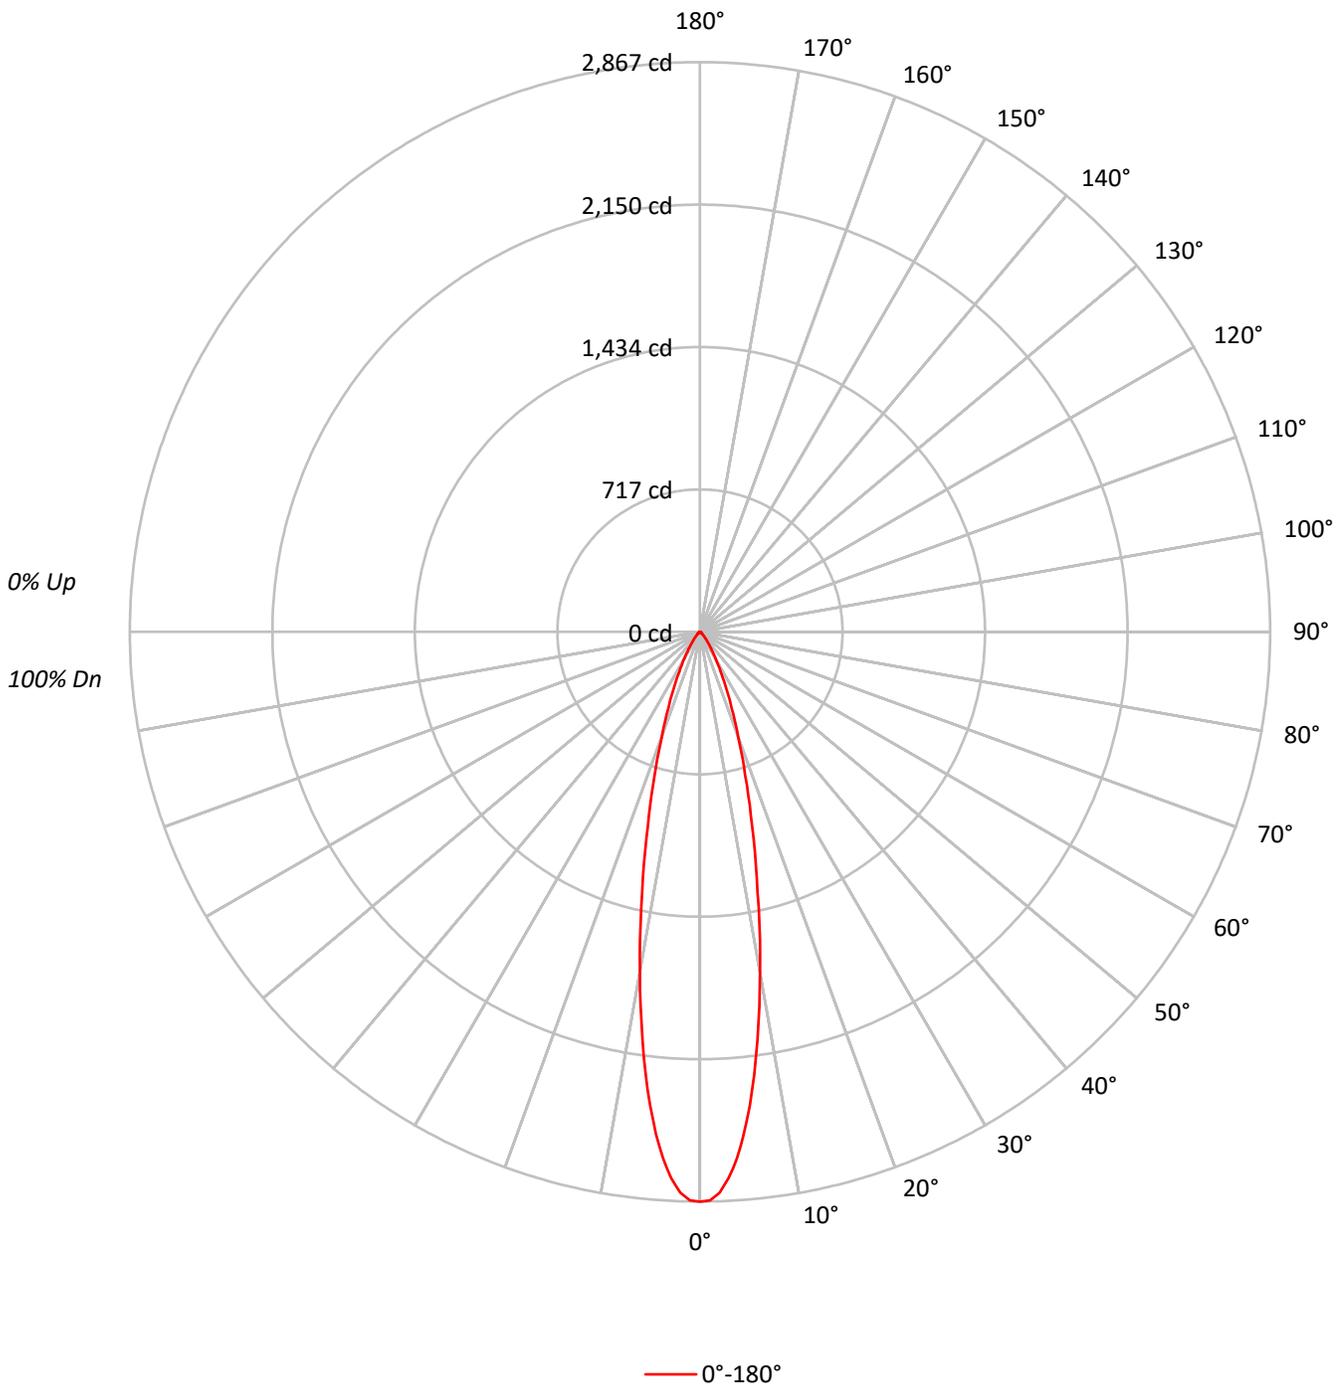



TEST NUMBER: P1269333
 CATALOG NUMBER: P3A09R159740DE010 E3DLP1WH

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

| | | | | | | | | | | | | | | | | | | | | | |
|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|
| RF | 20 | | | | 20 | | | | 20 | | | | 20 | | | | 20 | | | | 20 |
| RC | 80 | | | | 70 | | | | 50 | | | | 30 | | | | 10 | | | | 0 |
| RW | 70 | 50 | 30 | 10 | 70 | 50 | 30 | 10 | 50 | 30 | 10 | 50 | 30 | 10 | 50 | 30 | 10 | 50 | 30 | 10 | 0 |
| RCR | | | | | | | | | | | | | | | | | | | | | |
| 0 | 119 | 119 | 119 | 119 | 116 | 116 | 116 | 116 | 111 | 111 | 111 | 106 | 106 | 106 | 102 | 102 | 102 | 102 | 102 | 102 | 100 |
| 1 | 114 | 112 | 110 | 108 | 112 | 110 | 108 | 106 | 106 | 104 | 103 | 102 | 101 | 100 | 99 | 98 | 97 | 97 | 98 | 97 | 95 |
| 2 | 110 | 106 | 103 | 100 | 108 | 104 | 101 | 99 | 101 | 99 | 97 | 98 | 96 | 95 | 96 | 94 | 93 | 96 | 94 | 93 | 91 |
| 3 | 106 | 101 | 97 | 93 | 104 | 99 | 96 | 93 | 97 | 94 | 91 | 94 | 92 | 90 | 92 | 90 | 88 | 92 | 90 | 88 | 87 |
| 4 | 102 | 96 | 92 | 88 | 100 | 95 | 91 | 88 | 93 | 89 | 87 | 91 | 88 | 86 | 89 | 87 | 85 | 89 | 87 | 85 | 83 |
| 5 | 98 | 92 | 87 | 84 | 97 | 91 | 87 | 83 | 89 | 85 | 83 | 88 | 84 | 82 | 86 | 83 | 81 | 86 | 83 | 81 | 80 |
| 6 | 95 | 88 | 83 | 80 | 94 | 87 | 83 | 80 | 86 | 82 | 79 | 85 | 81 | 79 | 83 | 80 | 78 | 83 | 80 | 78 | 77 |
| 7 | 92 | 85 | 80 | 77 | 91 | 84 | 80 | 76 | 83 | 79 | 76 | 82 | 78 | 76 | 81 | 78 | 75 | 81 | 78 | 75 | 74 |
| 8 | 89 | 81 | 77 | 74 | 88 | 81 | 77 | 73 | 80 | 76 | 73 | 79 | 75 | 73 | 78 | 75 | 73 | 78 | 75 | 73 | 72 |
| 9 | 86 | 79 | 74 | 71 | 85 | 78 | 74 | 71 | 77 | 73 | 71 | 77 | 73 | 70 | 76 | 73 | 70 | 76 | 73 | 70 | 69 |
| 10 | 84 | 76 | 71 | 68 | 83 | 76 | 71 | 68 | 75 | 71 | 68 | 74 | 71 | 68 | 74 | 70 | 68 | 74 | 70 | 68 | 67 |

AVERAGE LUMINANCE (cd/sqm):

| | |
|-----|--------|
| | 0° |
| 0° | 628743 |
| 5° | 558110 |
| 10° | 387568 |
| 15° | 229195 |
| 20° | 130538 |
| 25° | 74617 |
| 30° | 41297 |
| 35° | 22004 |
| 40° | 12166 |
| 45° | 6605 |
| 50° | 4128 |
| 55° | 3250 |
| 60° | 2807 |
| 65° | 2594 |
| 70° | 2244 |
| 75° | 2372 |
| 80° | 1768 |
| 85° | 1761 |

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 0°
 Vertical Angle: 45°
 Luminance: 6605 cd/sqm



TEST NUMBER: P1269333
 CATALOG NUMBER: P3A09R159740DE010 E3DLP1WH

ZONAL LUMENS:

| Zone | Lumens | % Fixture |
|-----------|--------|-----------|
| 0°-10° | 215.6 | 29.3 |
| 10°-20° | 284.5 | 38.7 |
| 20°-30° | 146.5 | 19.9 |
| 30°-40° | 55.0 | 7.5 |
| 40°-50° | 18.0 | 2.4 |
| 50°-60° | 7.7 | 1.1 |
| 60°-70° | 4.9 | 0.7 |
| 70°-80° | 2.9 | 0.4 |
| 80°-90° | 0.8 | 0.1 |
| 90°-100° | 0.0 | 0.0 |
| 100°-110° | 0.0 | 0.0 |
| 110°-120° | 0.0 | 0.0 |
| 120°-130° | 0.0 | 0.0 |
| 130°-140° | 0.0 | 0.0 |
| 140°-150° | 0.0 | 0.0 |
| 150°-160° | 0.0 | 0.0 |
| 160°-170° | 0.0 | 0.0 |
| 170°-180° | 0.0 | 0.0 |
| 0°-30° | 646.7 | 87.9 |
| 0°-40° | 701.7 | 95.3 |
| 0°-60° | 727.4 | 98.8 |
| 0°-90° | 736.0 | 100.0 |
| 90°-120° | 0.0 | 0.0 |
| 90°-150° | 0.0 | 0.0 |
| 90°-180° | 0.0 | 0.0 |
| 0°-180° | 736.0 | 100.0 |

CANDELA DISTRIBUTION:

| | 0° | Flux |
|-----|------|------|
| 0° | 2867 | |
| 5° | 2536 | 216 |
| 15° | 1010 | 285 |
| 25° | 308 | 147 |
| 35° | 82 | 55 |
| 45° | 21 | 18 |
| 55° | 8 | 8 |
| 65° | 5 | 5 |
| 75° | 3 | 3 |
| 85° | 1 | 1 |
| 90° | 0 | |



TEST NUMBER: P1269333
CATALOG NUMBER: P3A09R159740DE010 E3DLP1WH

CANDELA DISTRIBUTION (FULL):

| 0° | |
|-------|--------|
| 0° | 2867.3 |
| 1° | 2861.6 |
| 2° | 2824.0 |
| 3° | 2752.4 |
| 4° | 2658.1 |
| 5° | 2535.5 |
| 6° | 2396.5 |
| 7° | 2244.0 |
| 8° | 2074.6 |
| 9° | 1907.3 |
| 10° | 1740.6 |
| 12.5° | 1339.3 |
| 15° | 1009.6 |
| 17.5° | 755.8 |
| 20° | 559.4 |
| 22.5° | 417.6 |
| 25° | 308.4 |
| 27.5° | 224.8 |
| 30° | 163.1 |
| 32.5° | 115.6 |
| 35° | 82.2 |
| 37.5° | 58.8 |
| 40° | 42.5 |
| 42.5° | 30.5 |
| 45° | 21.3 |
| 47.5° | 15.6 |
| 50° | 12.1 |
| 52.5° | 9.9 |
| 55° | 8.5 |
| 57.5° | 7.1 |
| 60° | 6.4 |
| 62.5° | 5.7 |
| 65° | 5.0 |
| 67.5° | 4.3 |
| 70° | 3.5 |
| 72.5° | 3.5 |
| 75° | 2.8 |
| 77.5° | 2.1 |
| 80° | 1.4 |
| 82.5° | 1.4 |
| 85° | 0.7 |
| 87.5° | 0.0 |
| 90° | 0.0 |

(END OF REPORT)