

Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for
Cooper Lighting Solutions

Brand: IRiS

Report Number: P1426401

Luminaire Tested: P3A09RH9830DE010 E3HY1MW

Issue Date: 3/9/2026

Test Information

Test Method: LM-79-2019
Report Number: P1426401
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2601-658-3)
Test Lab: INNOVATION CENTER
Issue Date: 3/9/2026
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: IRiS
Catalog Number: P3A09RH9830DE010 E3HY1MW
Description: 3in Adjustable LED luminaire with, RH optic, 3000K CCT AND, 98CRI , E3HY1MW TRIM
Light Source: -
Ballast/Driver: -

Summary


Lumens per Lamp: N/A
Luminaire Lumens: 262.0 lumens
Efficiency: N/A
Efficacy: 23.8 lumens/watt
Spacing Criteria (0/90/45): 0.6 / 0.6 / 0.53
Luminous Opening: Circular (Dia: 0.25' x H: 0')
CIE Type: Direct

Input Watts (W): 11
Input Voltage (V): NR
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT

TEST NUMBER: P1426401

CATALOG NUMBER: P3A09RH9830DE010 E3HY1MW

Luminous Intensity Polar Plot

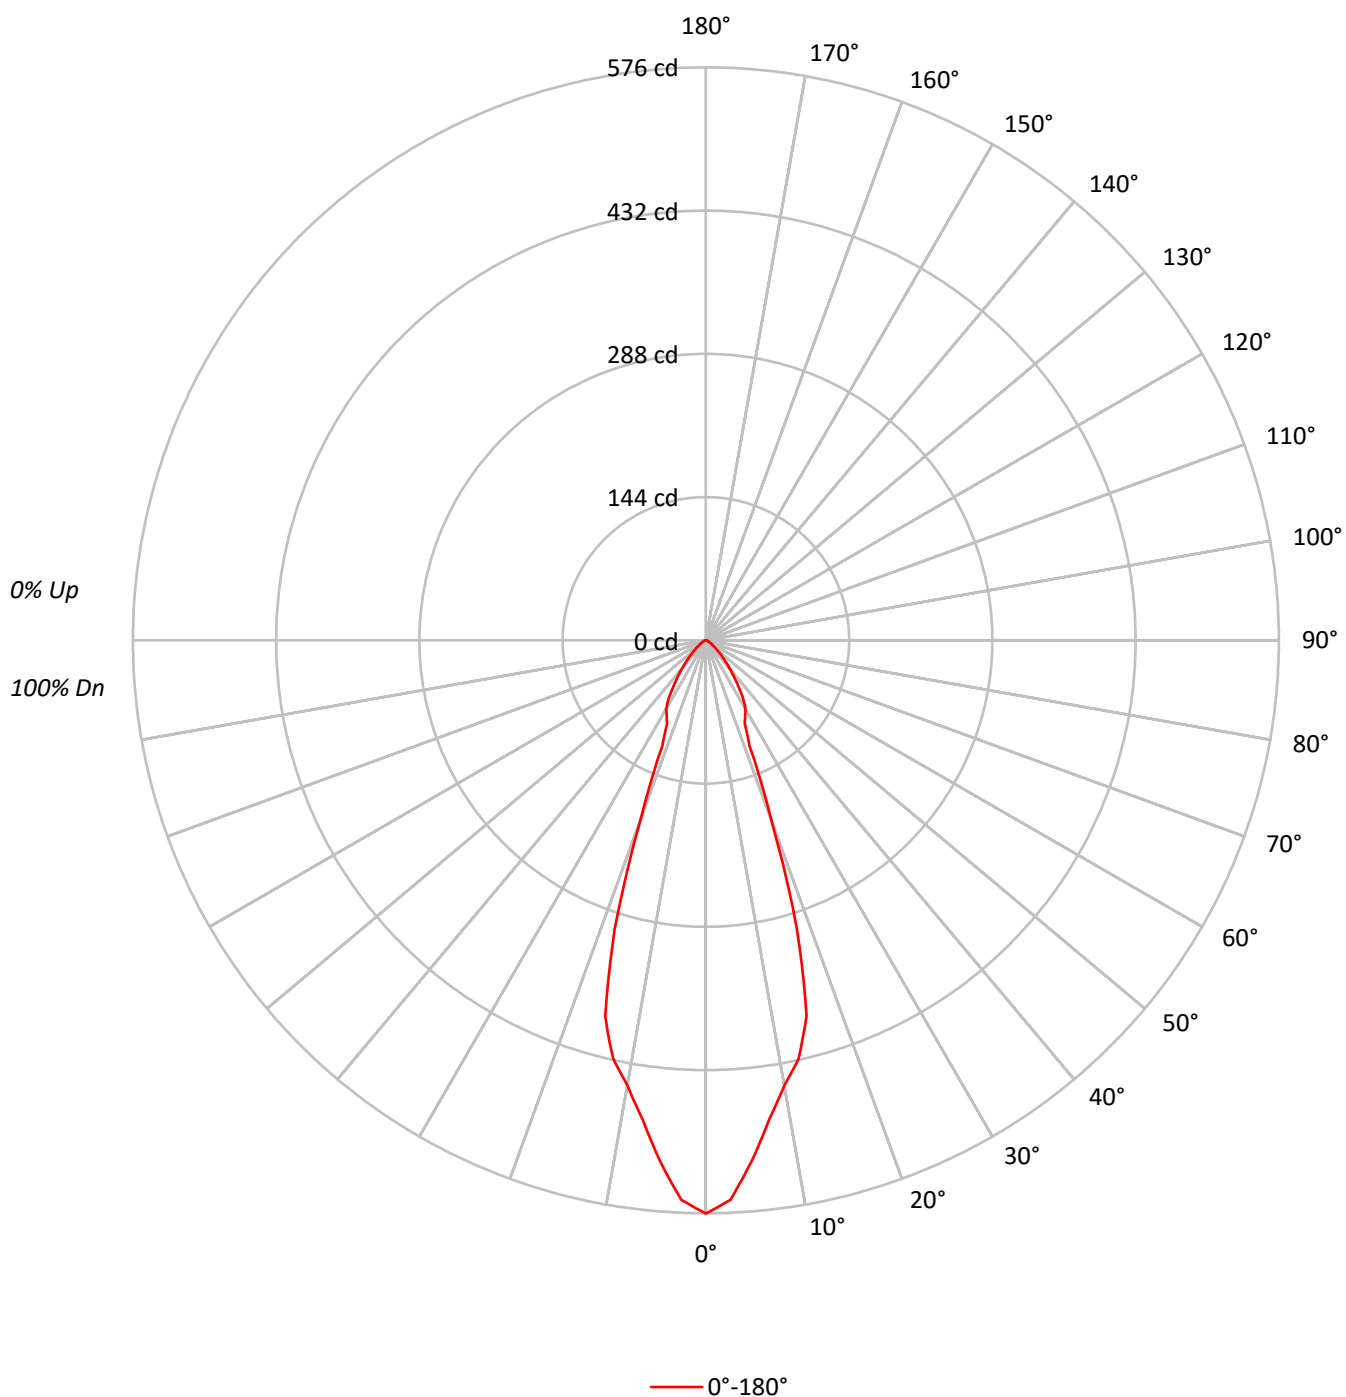

TEST NUMBER: P1426401

CATALOG NUMBER: P3A09RH9830DE010 E3HY1MW

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20
RC	80				70				50				30				10
RW	70	50	30	10	70	50	30	10	50	30	10		50	30	10		50
RCR																	
0	119	119	119	119	116	116	116	116	111	111	111		106	106	106		102
1	114	111	109	106	111	109	107	105	105	103	102		101	100	99		98
2	108	104	100	97	106	102	99	96	99	96	93		96	94	91		93
3	103	97	93	89	101	96	92	88	93	90	87		91	88	85		89
4	99	92	86	82	97	90	86	82	88	84	81		86	83	80		84
5	94	86	81	77	93	85	80	77	84	79	76		82	78	75		81
6	90	82	76	72	89	81	76	72	80	75	72		78	74	71		77
7	86	78	72	68	85	77	72	68	76	71	68		75	70	67		74
8	83	74	68	65	82	73	68	65	72	68	64		71	67	64		70
9	79	71	65	62	78	70	65	61	69	65	61		68	64	61		68
10	76	68	62	59	75	67	62	59	66	62	59		66	61	58		65

AVERAGE LUMINANCE (cd/sqm):

	0°
0°	126350
5°	115760
10°	101156
15°	88741
20°	44897
25°	22356
30°	20206
35°	15366
40°	10792
45°	7288
50°	4674
55°	3135
60°	2149
65°	1712
70°	1026
75°	932
80°	631
85°	0

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 0°

Vertical Angle: 45°

Luminance: 7288 cd/sqm

TEST NUMBER: P1426401

CATALOG NUMBER: P3A09RH9830DE010 E3HY1MW

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	47.9	18.3
10°-20°	99.0	37.8
20°-30°	48.3	18.4
30°-40°	36.1	13.8
40°-50°	18.6	7.1
50°-60°	7.7	2.9
60°-70°	3.1	1.2
70°-80°	1.1	0.4
80°-90°	0.2	0.1
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	195.2	74.5
0°-40°	231.3	88.3
0°-60°	257.5	98.3
0°-90°	262.0	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	262.0	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	576	
5°	526	48
15°	391	99
25°	92	48
35°	57	36
45°	24	19
55°	8	8
65°	3	3
75°	1	1
85°	0	0
90°	0	

TEST NUMBER: P1426401

CATALOG NUMBER: P3A09RH9830DE010 E3HY1MW

CANDELA DISTRIBUTION (FULL):

	0°
0°	576.2
2.5°	563.0
5°	525.9
7.5°	486.0
10°	454.3
12.5°	430.8
15°	390.9
17.5°	305.0
20°	192.4
22.5°	114.2
25°	92.4
27.5°	85.3
30°	79.8
32.5°	70.0
35°	57.4
37.5°	47.0
40°	37.7
42.5°	30.1
45°	23.5
47.5°	18.0
50°	13.7
52.5°	10.4
55°	8.2
57.5°	6.6
60°	4.9
62.5°	3.8
65°	3.3
67.5°	2.2
70°	1.6
72.5°	1.6
75°	1.1
77.5°	0.5
80°	0.5
82.5°	0.5
85°	0.0
87.5°	0.0
90°	0.0

(END OF REPORT)