

Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for
Cooper Lighting Solutions

Brand: IRiS

Report Number: P1272953

Luminaire Tested: P3A02R259830DE010 E3DL1LI

Issue Date: 1/30/2026

Test Information

Test Method: LM-79-2019
Report Number: P1272953
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2601-647-11)
Test Lab: INNOVATION CENTER
Issue Date: 1/30/2026
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: IRiS
Catalog Number: P3A02R259830DE010 E3DL1LI
Description: 3in Adjustable LED luminaire with, R25 optic, 3000K CCT AND, 98CRI , E3DL1LI TRIM
Light Source: -
Ballast/Driver: -

Summary


Lumens per Lamp: N/A
Luminaire Lumens: 187.0 lumens
Efficiency: N/A
Efficacy: 51.9 lumens/watt
Spacing Criteria (0/90/45): 0.49 / 0.49 / 0.51
Luminous Opening: Circular (Dia: 0.25' x H: 0')
CIE Type: Direct

Input Watts (W): 3.6
Input Voltage (V): NR
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT

TEST NUMBER: P1272953

CATALOG NUMBER: P3A02R259830DE010 E3DL1LI

Luminous Intensity Polar Plot

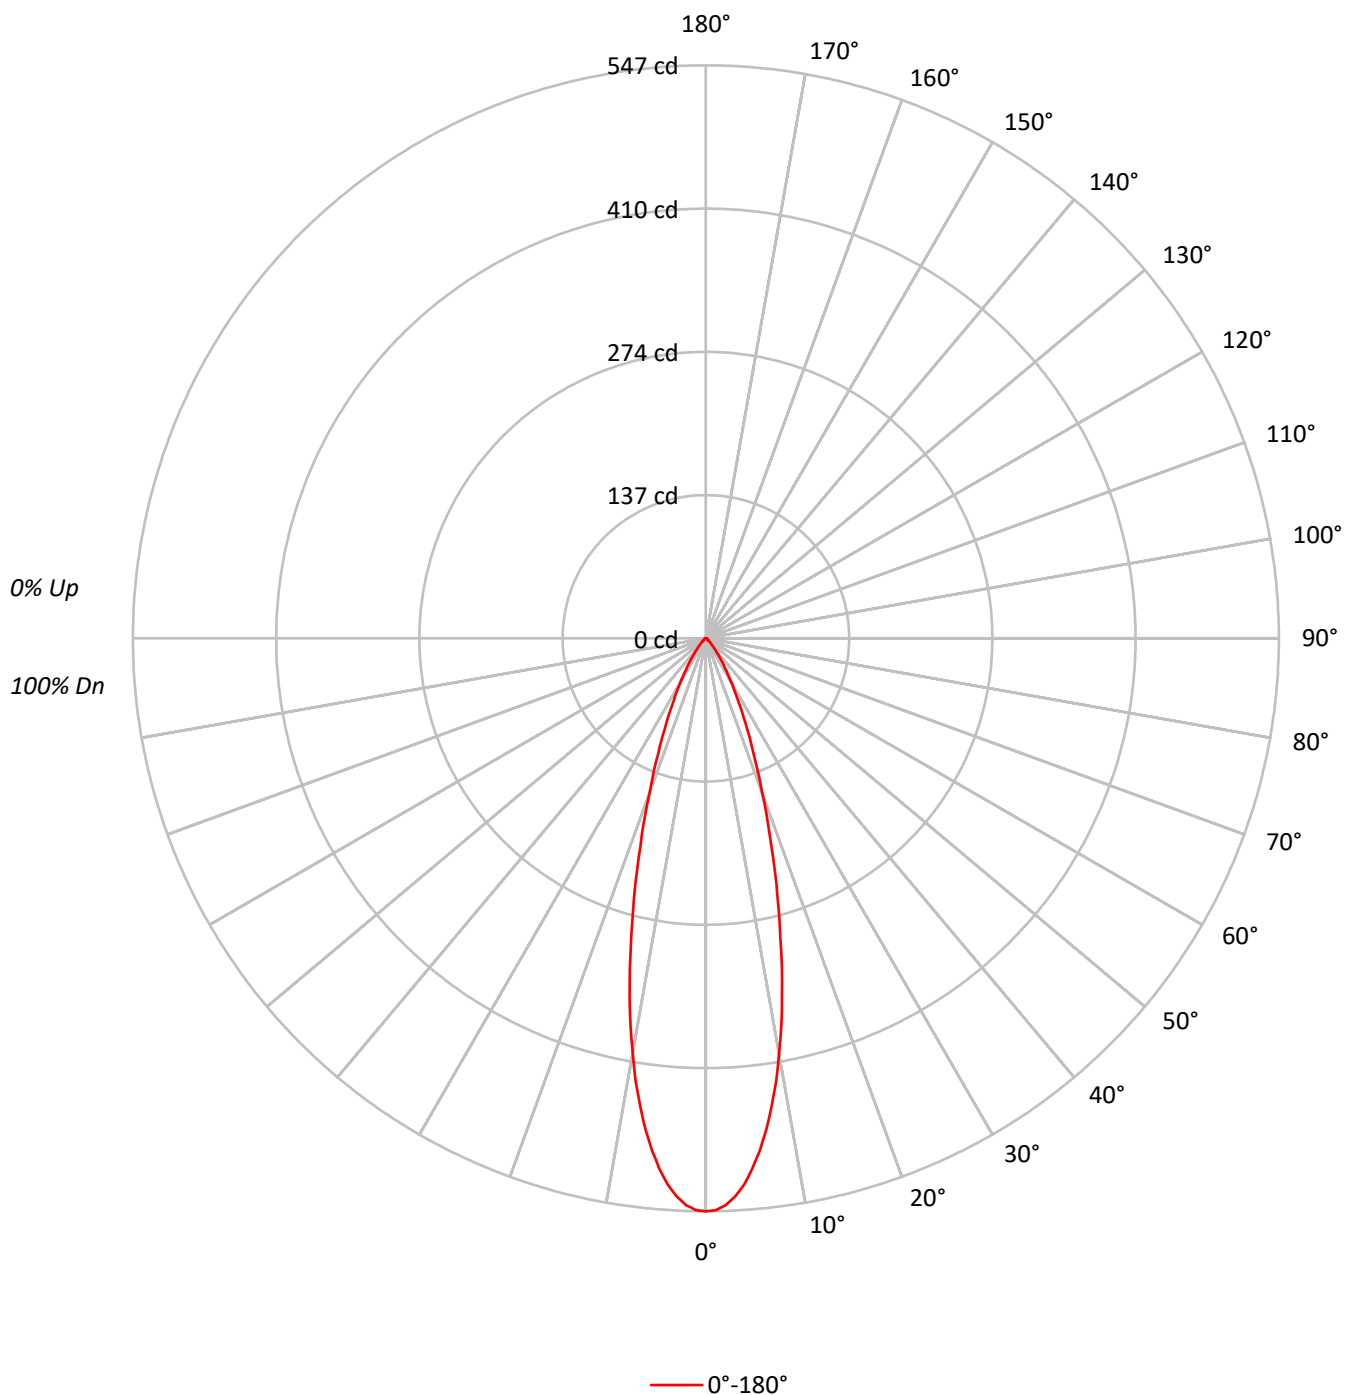



TEST NUMBER: P1272953

CATALOG NUMBER: P3A02R259830DE010 E3DL1LI

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20					20					20					20					20
RC	80					70					50					30					10
RW	70	50	30	10		70	50	30	10		50	30	10		50	30	10		50	30	10
RCR																					
0	119	119	119	119		116	116	116	116		111	111	111		106	106	106		102	102	102
1	114	112	110	108		112	110	108	106		106	104	103		102	101	100		99	98	97
2	110	105	102	99		107	104	101	98		101	98	96		98	96	94		95	93	92
3	105	100	96	92		103	98	95	91		96	93	90		94	91	89		91	89	87
4	101	95	90	87		99	94	89	86		92	88	85		90	87	84		88	85	83
5	97	90	85	82		96	89	85	81		88	84	81		86	83	80		85	82	79
6	94	86	81	78		92	86	81	77		84	80	77		83	79	76		82	78	76
7	90	83	78	74		89	82	77	74		81	77	74		80	76	73		79	75	73
8	87	79	74	71		86	79	74	71		78	74	71		77	73	70		76	73	70
9	84	76	71	68		83	76	71	68		75	71	68		74	70	68		73	70	67
10	81	73	69	65		80	73	68	65		72	68	65		72	68	65		71	67	65

AVERAGE LUMINANCE (cd/sqm):

	0°
0°	119947
5°	111908
10°	89644
15°	60863
20°	36823
25°	21534
30°	12255
35°	6746
40°	3578
45°	1892
50°	1092
55°	803
60°	702
65°	726
70°	705
75°	593
80°	505
85°	503

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 0°
Vertical Angle: 45°
Luminance: 1892 cd/sqm

TEST NUMBER: P1272953

CATALOG NUMBER: P3A02R259830DE010 E3DL1LI

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	45.1	24.1
10°-20°	73.7	39.4
20°-30°	42.1	22.5
30°-40°	16.6	8.9
40°-50°	5.1	2.7
50°-60°	2.0	1.1
60°-70°	1.4	0.7
70°-80°	0.8	0.4
80°-90°	0.3	0.1
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	160.9	86.0
0°-40°	177.5	94.9
0°-60°	184.6	98.7
0°-90°	187.0	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	187.0	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	547	
5°	508	45
15°	268	74
25°	89	42
35°	25	17
45°	6	5
55°	2	2
65°	1	1
75°	1	1
85°	0	0
90°	0	

TEST NUMBER: P1272953

CATALOG NUMBER: P3A02R259830DE010 E3DL1LI

CANDELA DISTRIBUTION (FULL):

0°	
0°	547.0
1°	546.0
2°	541.5
3°	533.6
4°	522.7
5°	508.4
6°	491.6
7°	472.7
8°	450.7
9°	428.2
10°	402.6
11°	377.4
12°	349.7
13°	322.4
14°	294.3
15°	268.1
17.5°	207.8
20°	157.8
22.5°	118.5
25°	89.0
27.5°	65.9
30°	48.4
32.5°	35.0
35°	25.2
37.5°	17.9
40°	12.5
42.5°	8.6
45°	6.1
47.5°	4.3
50°	3.2
52.5°	2.5
55°	2.1
57.5°	2.0
60°	1.6
62.5°	1.4
65°	1.4
67.5°	1.3
70°	1.1
72.5°	0.9
75°	0.7
77.5°	0.5
80°	0.4
82.5°	0.4
85°	0.2
87.5°	0.2



TEST NUMBER: P1272953

CATALOG NUMBER: P3A02R259830DE010 E3DL1LI

CANDELA DISTRIBUTION (continued):

0°
90° | 0.0

(END OF REPORT)