

Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for
Cooper Lighting Solutions

Brand: IRiS

Report Number: P1273302

Luminaire Tested: P3A05R259830DE010 E3DLD1GPH

Issue Date: 1/30/2026

Test Information

Test Method: LM-79-2019
Report Number: P1273302
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2601-647-10)
Test Lab: INNOVATION CENTER
Issue Date: 1/30/2026
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: IRiS
Catalog Number: P3A05R259830DE010 E3DLD1GPH
Description: 3in Adjustable LED luminaire with, R25 optic, 3000K CCT AND, 98CRI , E3DLD1GPH TRIM
Light Source: -
Ballast/Driver: -

Summary


Lumens per Lamp: N/A
Luminaire Lumens: 146.0 lumens
Efficiency: N/A
Efficacy: 20.3 lumens/watt
Spacing Criteria (0/90/45): 0.78 / 0.78 / 0.85
Luminous Opening: Circular (Dia: 0.25' x H: 0')
CIE Type: Direct

Input Watts (W): 7.2
Input Voltage (V): NR
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT

TEST NUMBER: P1273302

CATALOG NUMBER: P3A05R259830DE010 E3DLD1GPH

Luminous Intensity Polar Plot

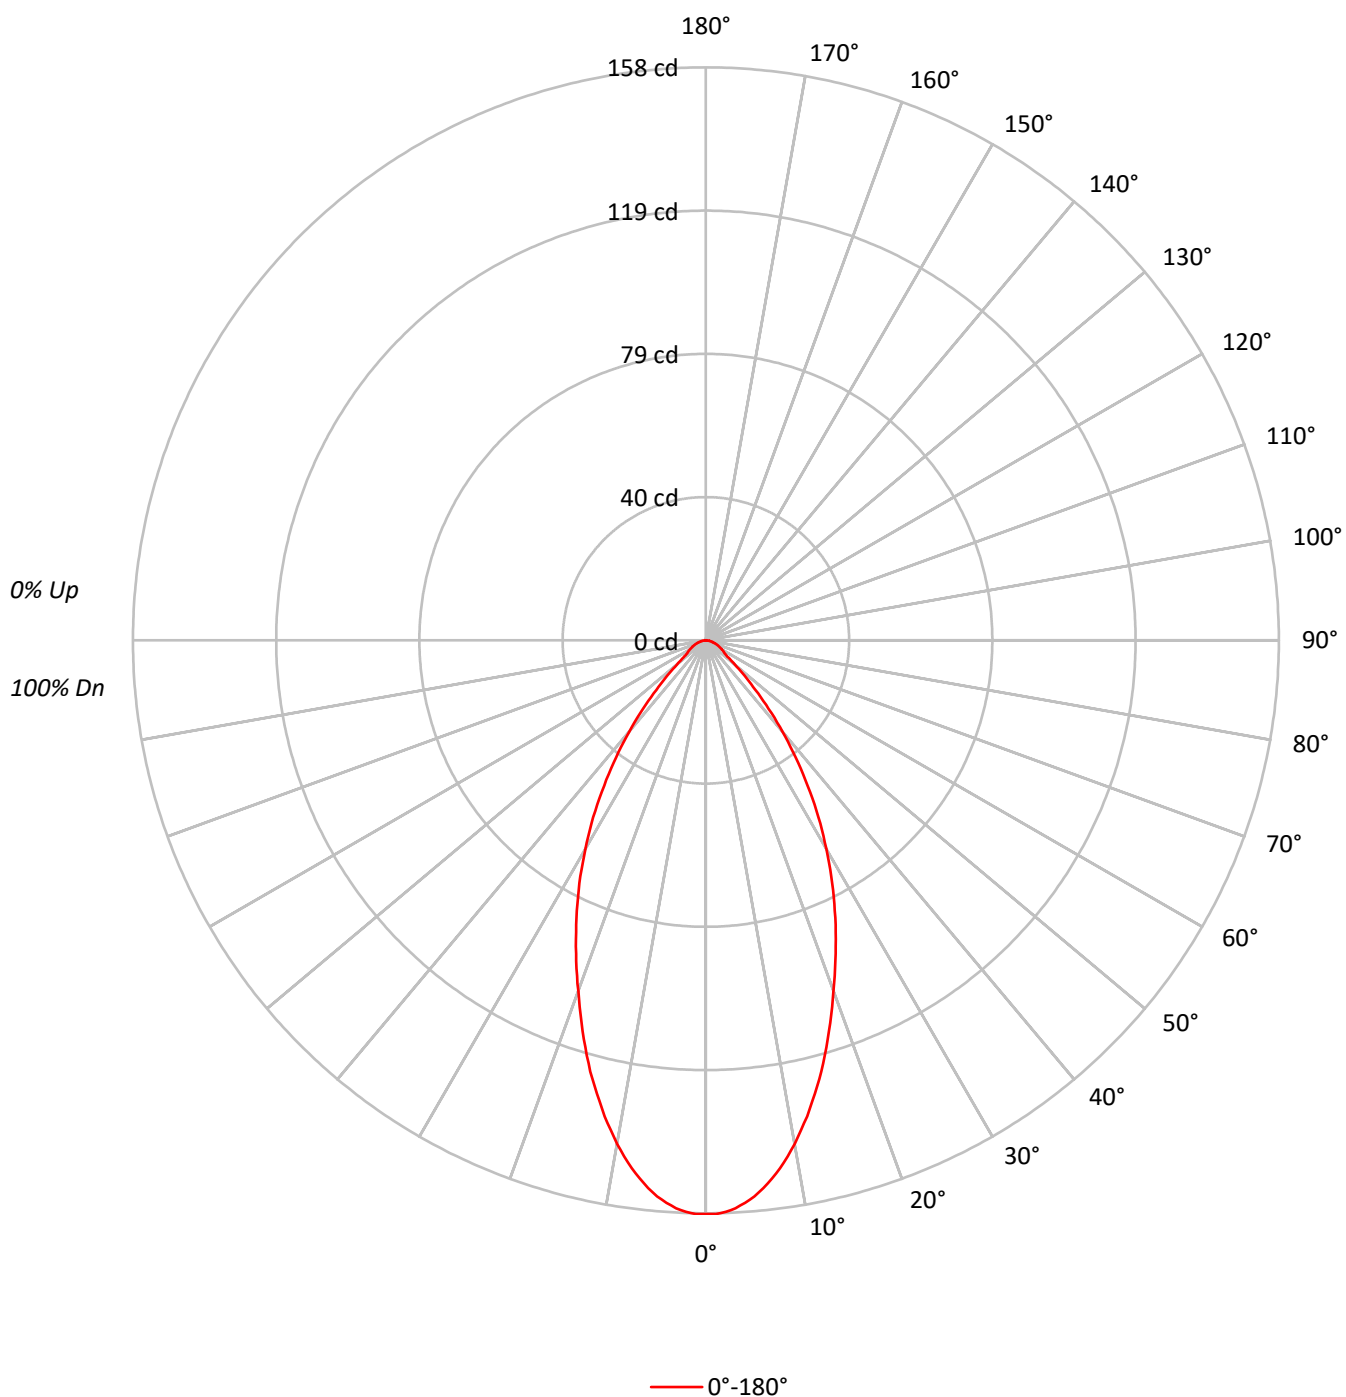

TEST NUMBER: P1273302

CATALOG NUMBER: P3A05R259830DE010 E3DLD1GPH

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20
RC	80				70				50				30				10
RW	70	50	30	10	70	50	30	10	50	30	10		50	30	10		50
RCR																	
0	119	119	119	119	116	116	116	116	111	111	111		106	106	106		102
1	112	109	106	104	110	107	105	102	103	101	99		99	98	96		96
2	106	100	96	92	104	99	94	91	95	92	89		92	89	87		89
3	100	92	87	82	98	91	86	82	88	84	80		86	82	79		83
4	94	85	79	74	92	84	78	74	82	77	73		80	76	72		78
5	89	79	73	68	87	78	72	68	76	71	67		75	70	66		73
6	84	74	67	62	82	73	67	62	71	66	62		70	65	61		69
7	79	69	62	58	78	68	62	58	67	61	57		66	61	57		65
8	75	65	58	54	74	64	58	53	63	57	53		62	57	53		61
9	71	61	54	50	70	60	54	50	59	54	50		58	53	50		57
10	68	57	51	47	67	57	51	47	56	50	47		55	50	46		54

AVERAGE LUMINANCE (cd/sqm):

	0°
0°	34690
5°	33876
10°	31396
15°	27946
20°	24012
25°	20421
30°	16813
35°	13090
40°	9418
45°	5985
50°	3548
55°	2447
60°	2237
65°	2075
70°	1859
75°	1694
80°	1642
85°	1258

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 0°

Vertical Angle: 45°

Luminance: 5985 cd/sqm

TEST NUMBER: P1273302

CATALOG NUMBER: P3A05R259830DE010 E3DLD1GPH

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	14.3	9.8
10°-20°	34.2	23.4
20°-30°	38.6	26.5
30°-40°	30.5	20.9
40°-50°	15.4	10.6
50°-60°	6.2	4.2
60°-70°	4.0	2.7
70°-80°	2.2	1.5
80°-90°	0.6	0.4
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	87.1	59.7
0°-40°	117.6	80.6
0°-60°	139.2	95.4
0°-90°	146.0	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	146.0	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	158	
5°	154	14
15°	123	34
25°	84	39
35°	49	31
45°	19	15
55°	6	6
65°	4	4
75°	2	2
85°	0	1
90°	0	

TEST NUMBER: P1273302

CATALOG NUMBER: P3A05R259830DE010 E3DLD1GPH

CANDELA DISTRIBUTION (FULL):

0°	
0°	158.2
1°	158.2
2°	157.7
3°	156.8
4°	155.5
5°	153.9
6°	151.9
7°	149.5
8°	147.0
9°	144.1
10°	141.0
11°	137.5
12°	134.2
13°	130.4
14°	126.8
15°	123.1
17.5°	113.0
20°	102.9
22.5°	93.5
25°	84.4
27.5°	75.5
30°	66.4
32.5°	57.8
35°	48.9
37.5°	40.7
40°	32.9
42.5°	25.6
45°	19.3
47.5°	14.4
50°	10.4
52.5°	7.8
55°	6.4
57.5°	5.8
60°	5.1
62.5°	4.5
65°	4.0
67.5°	3.5
70°	2.9
72.5°	2.5
75°	2.0
77.5°	1.6
80°	1.3
82.5°	0.9
85°	0.5
87.5°	0.2



TEST NUMBER: P1273302

CATALOG NUMBER: P3A05R259830DE010 E3DLD1GPH

CANDELA DISTRIBUTION (continued):



(END OF REPORT)