

Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for
Cooper Lighting Solutions

Brand: IRiS

Report Number: P1273466

Luminaire Tested: P3A05R559830DE010 E3D1H

Issue Date: 1/29/2026

Test Information

Test Method: LM-79-2019
Report Number: P1273466
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2501-338-14)
Test Lab: INNOVATION CENTER
Issue Date: 1/29/2026
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: IRiS
Catalog Number: P3A05R559830DE010 E3D1H
Description: 3in Adjustable LED luminaire with, R55 optic, 3000K CCT AND, 98CRI , E3D1H TRIM
Light Source: -
Ballast/Driver: -

Summary


Lumens per Lamp: N/A
Luminaire Lumens: 478.0 lumens
Efficiency: N/A
Efficacy: 66.4 lumens/watt
Spacing Criteria (0/90/45): 0.93 / 0.93 / 0.82
Luminous Opening: Circular (Dia: 0.25' x H: 0')
CIE Type: Direct

Input Watts (W): 7.2
Input Voltage (V): NR
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT

TEST NUMBER: P1273466

CATALOG NUMBER: P3A05R559830DE010 E3D1H

Luminous Intensity Polar Plot

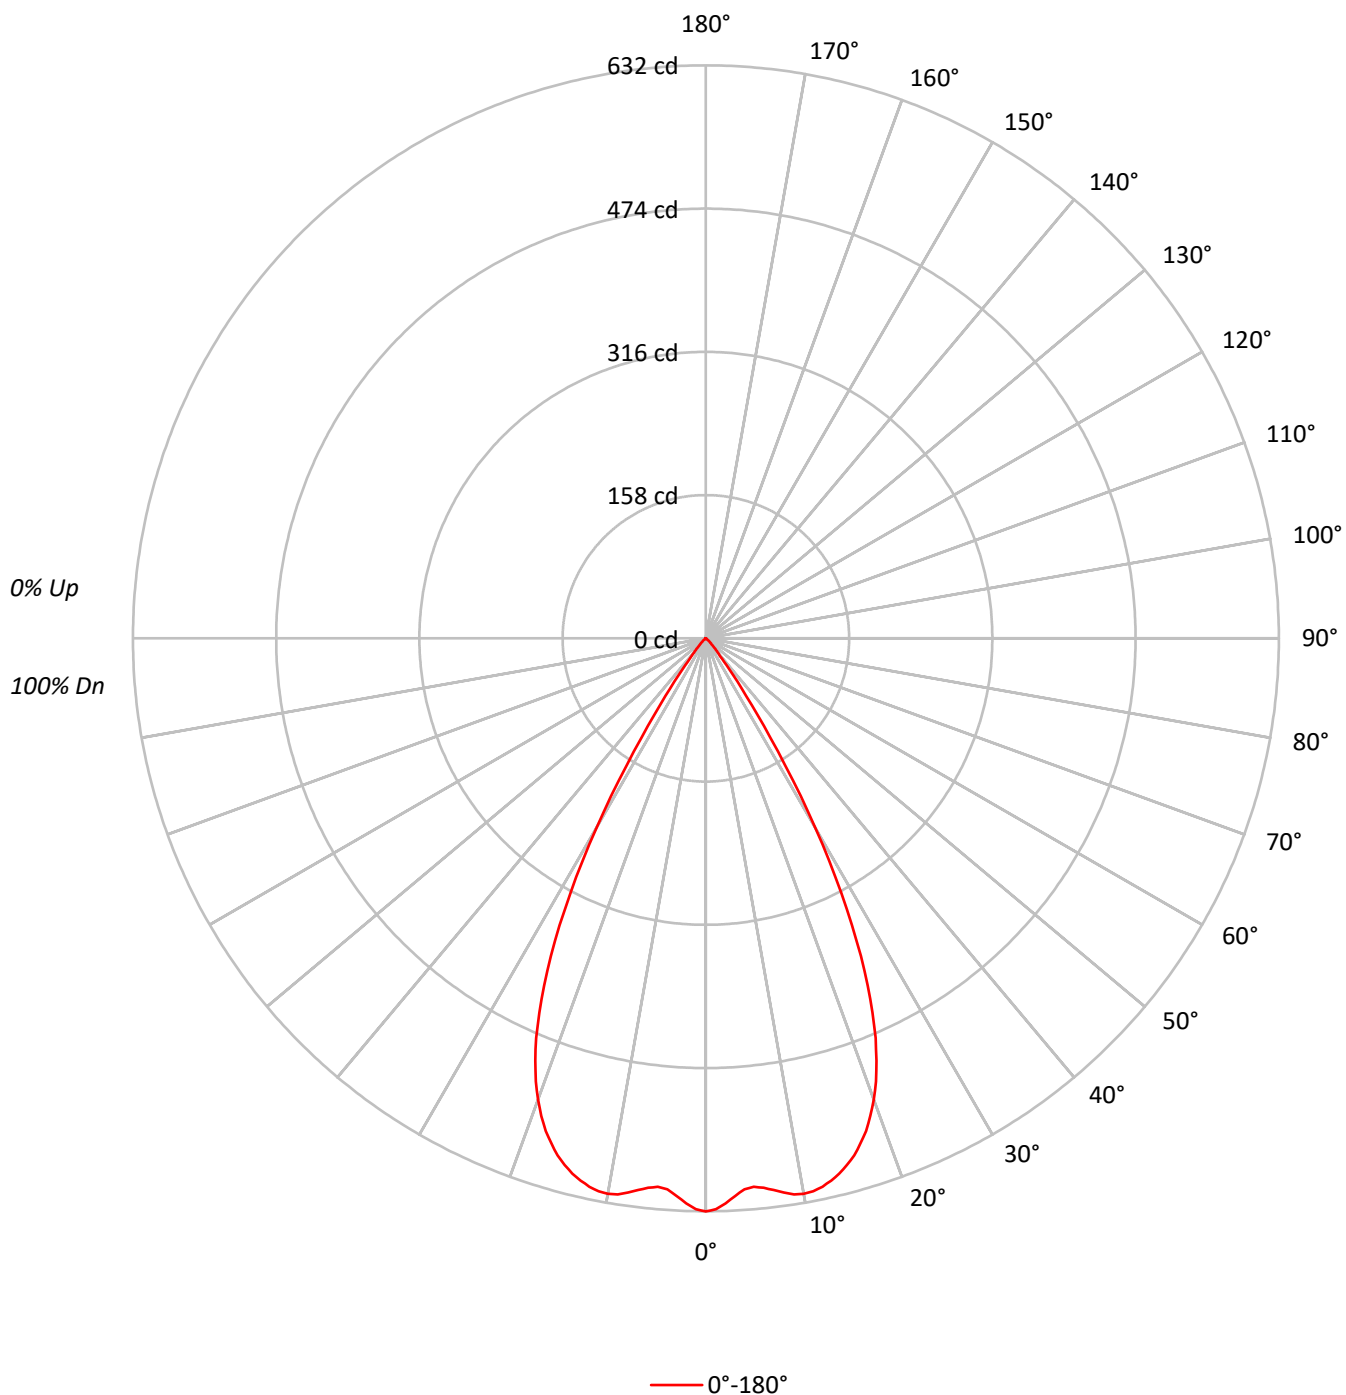

TEST NUMBER: P1273466

CATALOG NUMBER: P3A05R559830DE010 E3D1H

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20
RC	80				70				50				30				0
RW	70	50	30	10	70	50	30	10	50	30	10		50	30	10		0
RCR																	
0	119	119	119	119	116	116	116	116	111	111	111		106	106	106		100
1	114	111	109	107	112	109	107	105	105	104	102		102	100	99		95
2	109	105	101	98	107	103	100	97	100	97	95		97	95	93		89
3	104	98	94	90	102	97	93	90	95	91	88		92	89	87		84
4	100	93	88	84	98	92	87	84	90	86	83		88	84	82		79
5	95	88	82	79	94	87	82	78	85	81	78		84	80	77		75
6	91	83	78	74	90	82	77	74	81	76	73		80	76	73		71
7	87	79	73	70	86	78	73	69	77	72	69		76	72	69		67
8	83	75	69	66	82	74	69	65	73	69	65		72	68	65		63
9	80	71	66	62	79	71	66	62	70	65	62		69	65	62		60
10	77	68	62	59	76	67	62	59	67	62	59		66	62	59		57

AVERAGE LUMINANCE (cd/sqm):

	0°
0°	138607
5°	133700
10°	138497
15°	136527
20°	126361
25°	102199
30°	61250
35°	20746
40°	5725
45°	2543
50°	751
55°	153
60°	88
65°	104
70°	128
75°	0
80°	0
85°	0

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 0°

Vertical Angle: 45°

Luminance: 2543 cd/sqm

TEST NUMBER: P1273466

CATALOG NUMBER: P3A05R559830DE010 E3D1H

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	58.8	12.3
10°-20°	167.4	35.0
20°-30°	186.1	38.9
30°-40°	57.9	12.1
40°-50°	7.0	1.5
50°-60°	0.5	0.1
60°-70°	0.2	0.0
70°-80°	0.0	0.0
80°-90°	0.0	0.0
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	412.4	86.3
0°-40°	470.3	98.4
0°-60°	477.8	100.0
0°-90°	478.0	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	478.0	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	632	
5°	607	59
15°	601	167
25°	422	186
35°	78	58
45°	8	7
55°	0	1
65°	0	0
75°	0	0
85°	0	0
90°	0	

TEST NUMBER: P1273466

CATALOG NUMBER: P3A05R559830DE010 E3D1H

CANDELA DISTRIBUTION (FULL):

0°	
0°	632.1
1°	629.8
2°	623.6
3°	616.0
4°	609.1
5°	607.4
6°	609.3
7°	613.1
8°	617.4
9°	620.9
10°	622.0
11°	621.2
12°	618.3
13°	613.8
14°	608.5
15°	601.4
16°	593.3
17°	582.9
18°	571.3
19°	557.3
20°	541.5
21°	523.5
22°	502.3
23°	478.9
24°	452.0
25°	422.4
26°	389.9
27°	355.4
28°	318.5
29°	280.6
30°	241.9
31°	203.0
32°	165.1
32.5°	148.2
33°	130.7
34°	101.1
35°	77.5
36°	59.0
37°	43.8
37.5°	37.4
38°	32.5
39°	24.7
40°	20.0
42.5°	12.7
45°	8.2

TEST NUMBER: P1273466

CATALOG NUMBER: P3A05R559830DE010 E3D1H

CANDELA DISTRIBUTION (continued):

	0°
47.5°	4.9
50°	2.2
52.5°	0.7
55°	0.4
57.5°	0.2
60°	0.2
62.5°	0.2
65°	0.2
67.5°	0.2
70°	0.2
72.5°	0.0
75°	0.0
77.5°	0.0
80°	0.0
82.5°	0.0
85°	0.0
87.5°	0.0
90°	0.0

(END OF REPORT)