

Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for
Cooper Lighting Solutions

Brand: IRiS

Report Number: P1274030

Luminaire Tested: P3A13R309830DE010 E3DLP1GPH

Issue Date: 1/30/2026

Test Information

Test Method: LM-79-2019
Report Number: P1274030
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2601-647-13)
Test Lab: INNOVATION CENTER
Issue Date: 1/30/2026
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: IRiS
Catalog Number: P3A13R309830DE010 E3DLP1GPH
Description: 3in Adjustable LED luminaire with, R30 optic, 3000K CCT AND, 98CRI , E3DLP1GPH TRIM
Light Source: -
Ballast/Driver: -


Summary

Lumens per Lamp: N/A
Luminaire Lumens: 229.0 lumens
Efficiency: N/A
Efficacy: 15.8 lumens/watt
Spacing Criteria (0/90/45): 0.66 / 0.66 / 0.7
Luminous Opening: Circular (Dia: 0.25' x H: 0')
CIE Type: Direct

Input Watts (W): 14.5
Input Voltage (V): NR
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT

TEST NUMBER: P1274030
CATALOG NUMBER: P3A13R309830DE010 E3DLP1GPH

Luminous Intensity Polar Plot

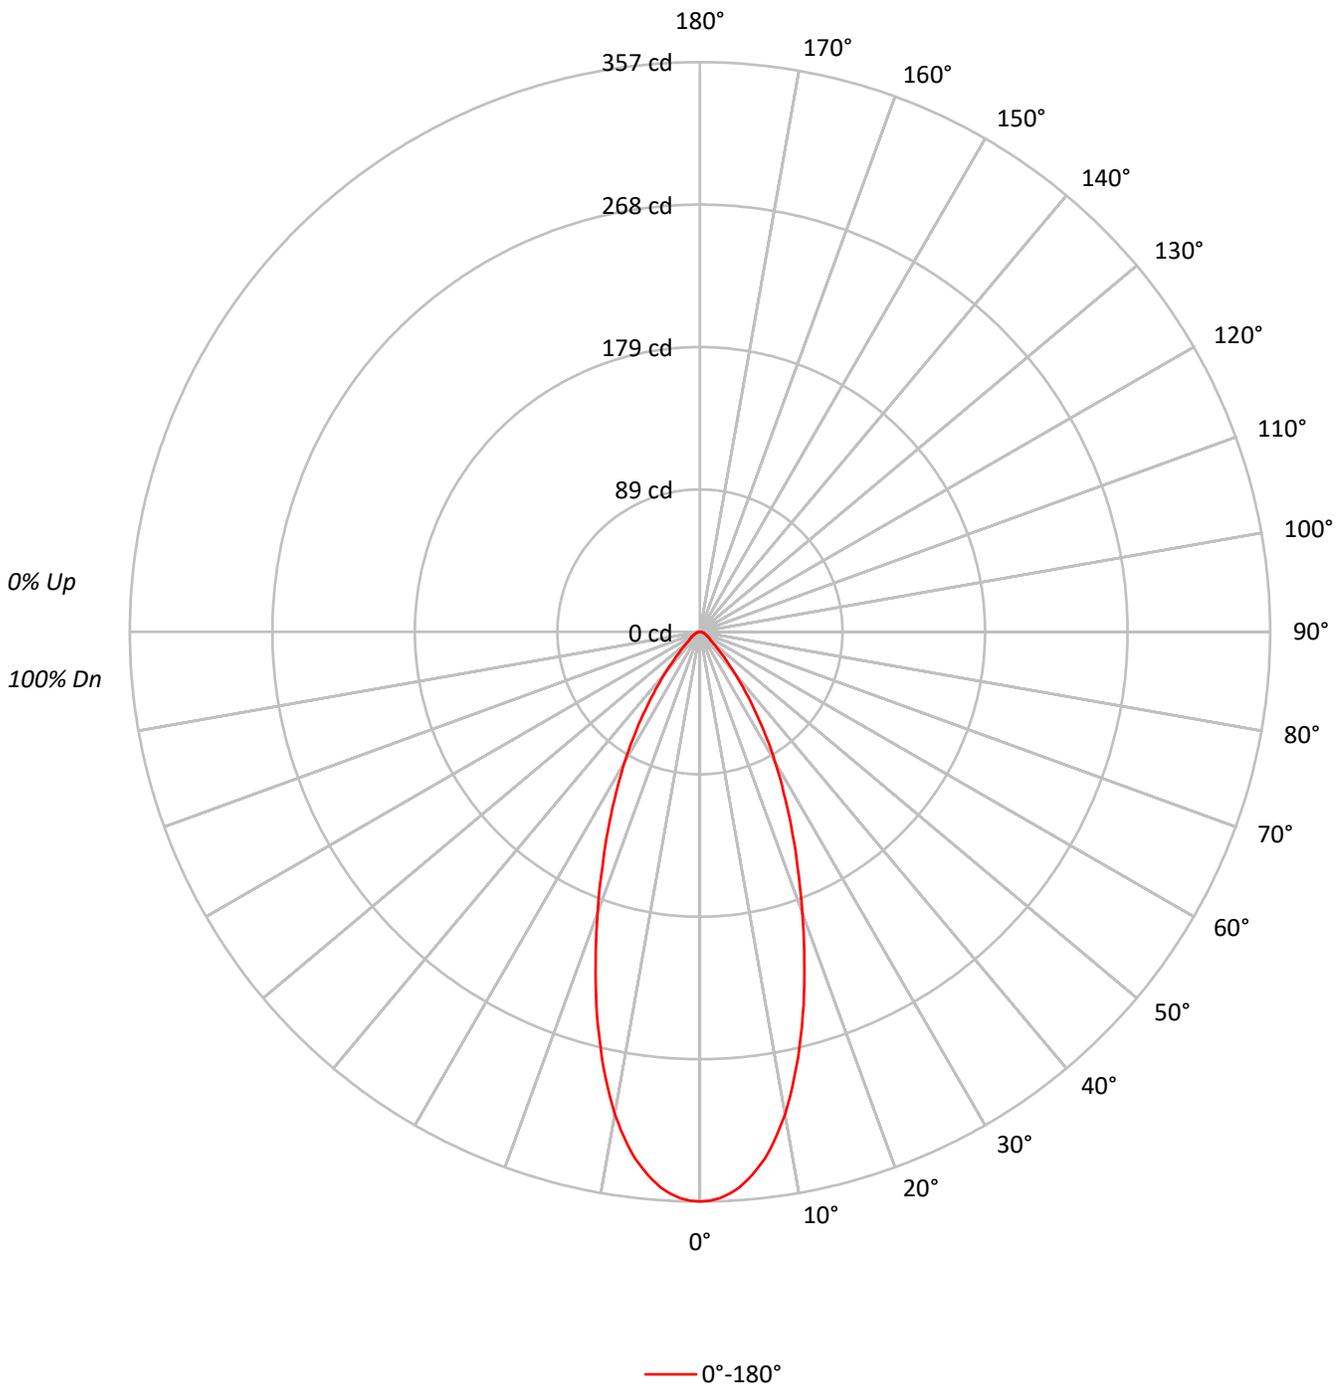



TEST NUMBER: P1274030

CATALOG NUMBER: P3A13R309830DE010 E3DLP1GPH

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20				20	
RC	80				70				50				30				10				0	
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0	
RCR																						
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100				100
1	113	110	108	105	111	108	106	104	104	102	100	100	99	97	97	96	95	93				93
2	107	102	98	95	105	101	97	94	97	94	92	94	92	90	92	90	88	86				86
3	102	95	90	86	100	94	89	85	91	87	84	89	86	83	87	84	82	80				80
4	97	89	84	79	95	88	83	79	86	81	78	84	80	77	82	79	76	74				74
5	92	84	78	73	90	83	77	73	81	76	72	79	75	72	78	74	71	70				70
6	88	79	73	68	86	78	72	68	76	71	68	75	71	67	74	70	67	65				65
7	83	74	68	64	82	74	68	64	72	67	63	71	67	63	70	66	63	61				61
8	80	70	64	60	78	70	64	60	69	63	60	67	63	60	67	62	59	58				58
9	76	67	61	57	75	66	60	57	65	60	56	64	60	56	63	59	56	55				55
10	73	63	58	54	72	63	57	54	62	57	53	61	57	53	60	56	53	52				52

AVERAGE LUMINANCE (cd/sqm):

	0°
0°	78261
5°	75809
10°	68313
15°	56504
20°	43754
25°	32808
30°	23826
35°	15874
40°	9761
45°	5737
50°	3514
55°	2867
60°	2500
65°	2024
70°	1795
75°	1779
80°	1389
85°	1761

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 0°
 Vertical Angle: 45°
 Luminance: 5737 cd/sqm



TEST NUMBER: P1274030
 CATALOG NUMBER: P3A13R309830DE010 E3DLP1GPH

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	31.7	13.8
10°-20°	68.6	29.9
20°-30°	62.4	27.2
30°-40°	37.7	16.5
40°-50°	15.1	6.6
50°-60°	6.7	2.9
60°-70°	4.0	1.8
70°-80°	2.2	1.0
80°-90°	0.6	0.3
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	162.6	71.0
0°-40°	200.3	87.5
0°-60°	222.2	97.0
0°-90°	229.0	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	229.0	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	357	
5°	344	32
15°	249	69
25°	136	62
35°	59	38
45°	18	15
55°	8	7
65°	4	4
75°	2	2
85°	1	1
90°	0	



TEST NUMBER: P1274030
CATALOG NUMBER: P3A13R309830DE010 E3DLP1GPH

CANDELA DISTRIBUTION (FULL):

0°	
0°	356.9
1°	356.5
2°	355.1
3°	352.6
4°	349.1
5°	344.4
6°	338.8
7°	332.7
8°	324.9
9°	316.0
10°	306.8
11°	296.1
12°	284.8
13°	273.4
14°	261.0
15°	248.9
17.5°	217.3
20°	187.5
22.5°	159.8
25°	135.6
27.5°	113.6
30°	94.1
32.5°	76.0
35°	59.3
37.5°	45.5
40°	34.1
42.5°	24.9
45°	18.5
47.5°	13.8
50°	10.3
52.5°	8.2
55°	7.5
57.5°	6.4
60°	5.7
62.5°	4.6
65°	3.9
67.5°	3.6
70°	2.8
72.5°	2.5
75°	2.1
77.5°	1.8
80°	1.1
82.5°	0.7
85°	0.7
87.5°	0.4



TEST NUMBER: P1274030
CATALOG NUMBER: P3A13R309830DE010 E3DLP1GPH

CANDELA DISTRIBUTION (continued):

0°
90° | 0.0

(END OF REPORT)